



光谱图

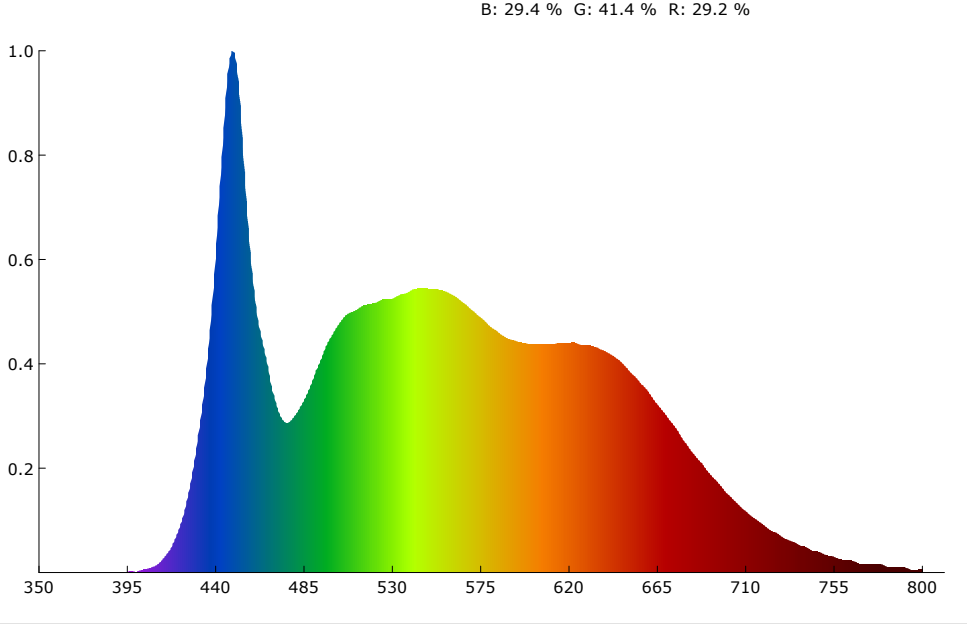

SDCM

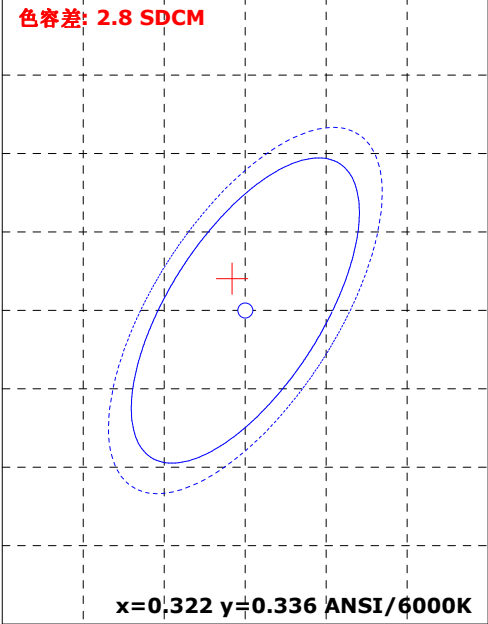

颜色参数:

坐标x: 0.3242 坐标y: 0.3420 坐标u: 0.2009 坐标v: 0.3179 坐标u': 0.2009 坐标v': 0.4769
红色比: 29.2 % 绿色比: 41.4 % 蓝色比: 29.4 % 光通量红色比: 14.9 % 光通量绿色比: 81.3 % 光通量蓝色比: 3.7 %

显色指数: 91.4 AvgR: 88.8
R1: 92.3 R2: 92.3 R3: 91.0 R4: 92.9 R5: 91.5 R6: 87.1 R7: 92.9 R8: 91.4
R9: 75.7 R10: 81.2 R11: 92.3 R12: 71.5 R13: 92.0 R14: 95.1 R15: 92.2


色温: 5867 K 光通量: 1252.948 lm 峰值波长: 449.6 nm 色容差: 2.8
明暗视觉比: 2.2 中心波长: 450.0 nm 主波长: 504.7 nm 质心波长: 556.8 nm
半宽度: 22.8 nm 色偏差: 0.00423 色纯度: 2.8 % 色质指数: 91.3
LER(TM-30): 280.8 辐射功率: 4462.9 mw 色域指数(Rg): 100.6 逼真度(Rf): 90.1
红光辐射功率: 1251.0 mw 近红辐射功率: 169.1 mw 远红辐射功率: 6.9 mw

电参数:







光效: 38.0 Lm/W 能效: 41.3 能效等级: G
电压: 221.4 V 电流: 0.260 A 功率: 33.010 W 功率因素: 0.571

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:09/23/23
备注:

Rf: 90.1 CCT: 5867K u': 0.2009
Rg: 100.6 LER: 280.8 Duv: 0.00423 v': 0.4769



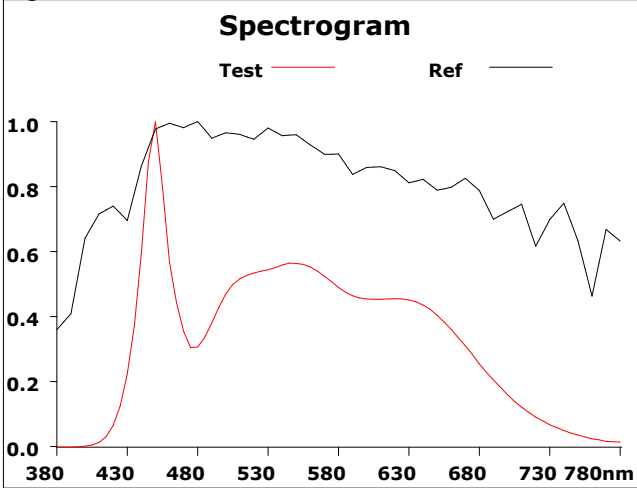


500			
Hue Bin	Rf	Chroma	Hue
1	91.2	-3.2%	-1.5%
2	93.8	-2.8%	1.4%
3	89.6	-1.6%	4.8%
4	91.2	0.0%	4.4%
5	89.6	0.9%	3.0%
6	95.0	2.3%	-0.1%
7	96.3	0.2%	-2.0%
8	92.9	-3.1%	-1.2%
9	91.6	-4.9%	3.9%
10	85.2	-3.2%	7.6%
11	79.8	0.9%	11.4%
12	89.3	2.3%	6.1%
13	91.8	5.9%	2.3%
14	90.8	4.4%	-1.8%
15	84.2	8.9%	-9.8%
16	92.3	-0.3%	-3.9%

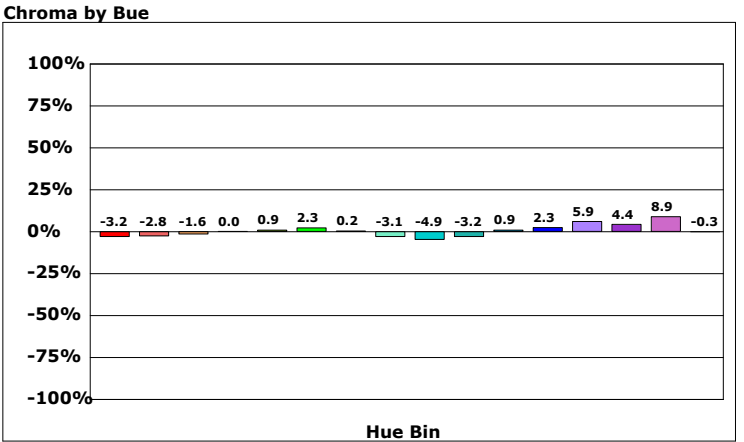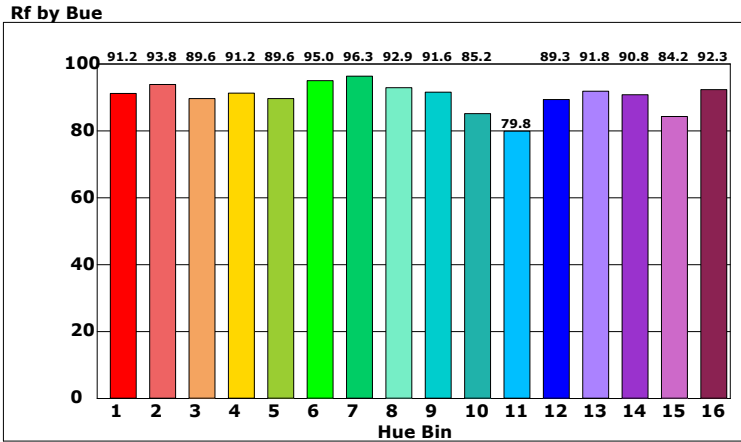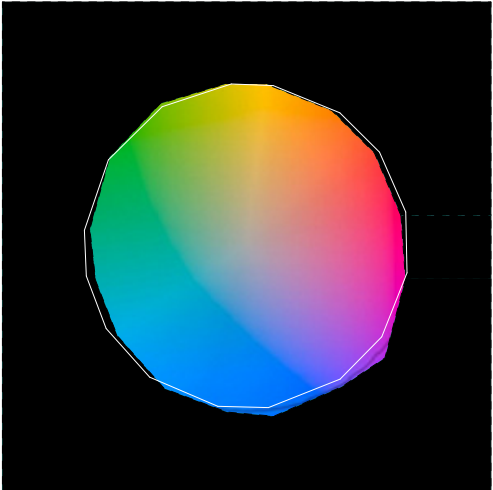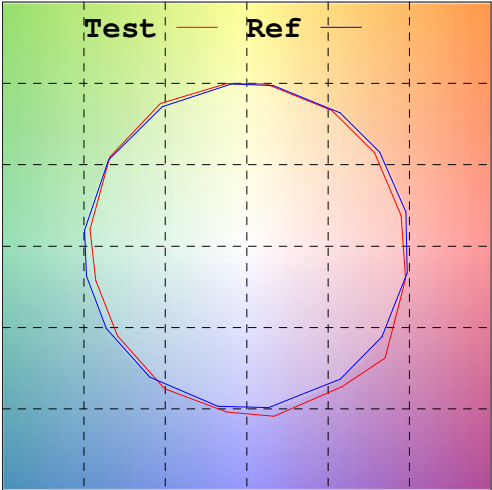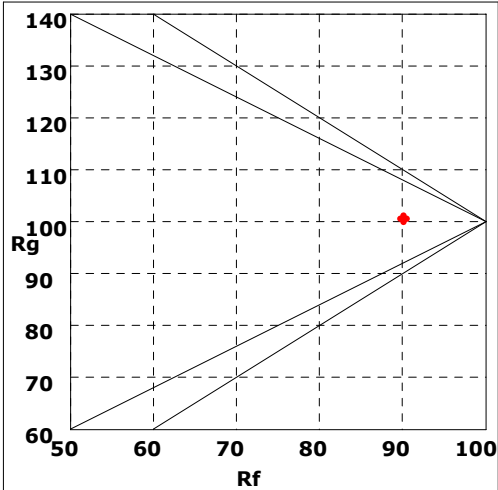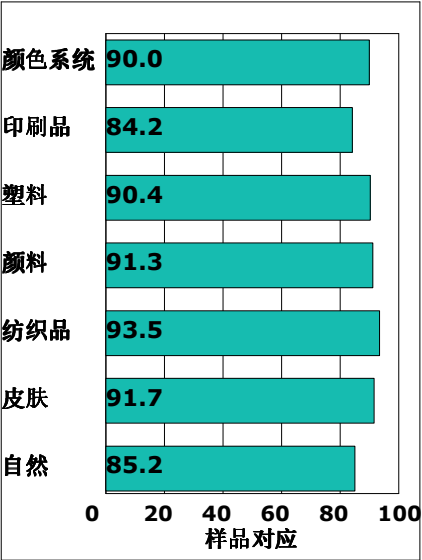

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:09/23/23

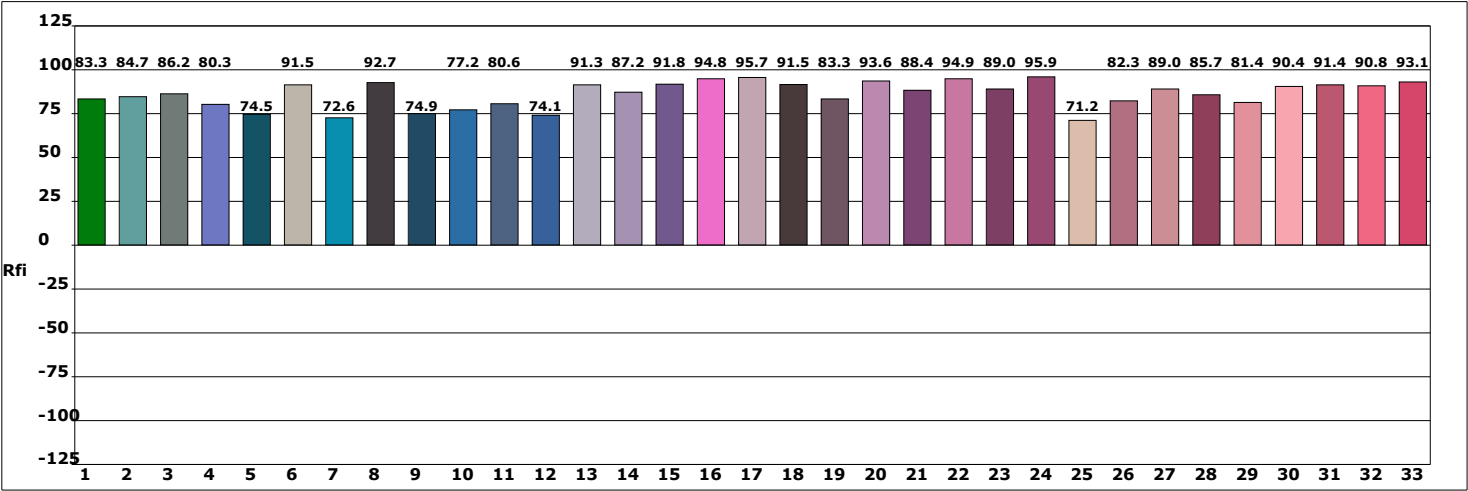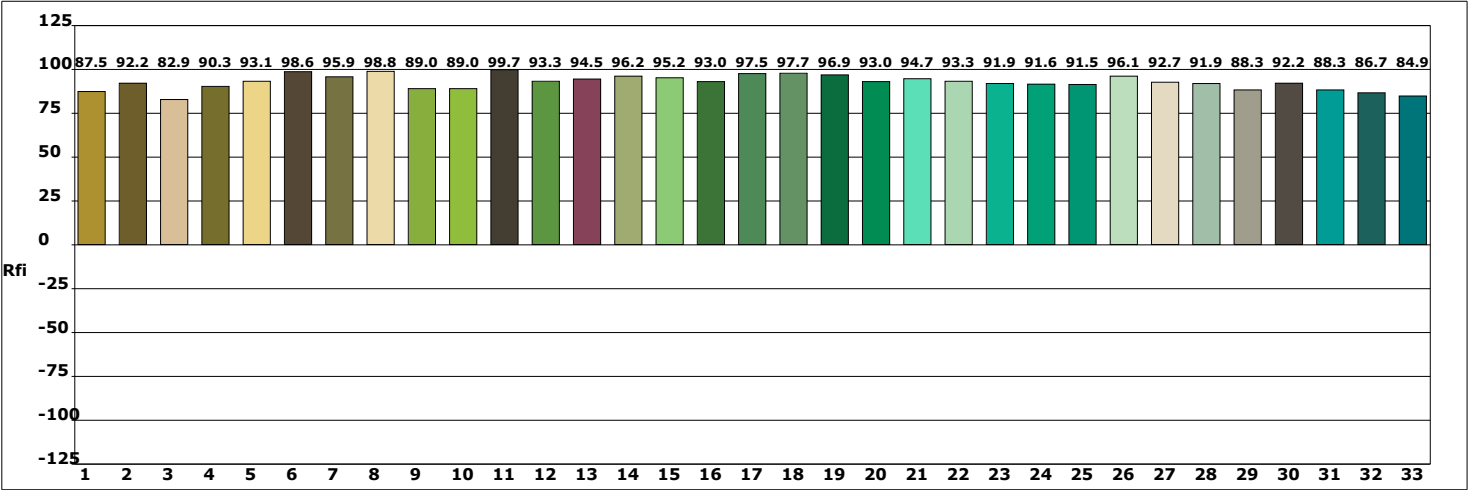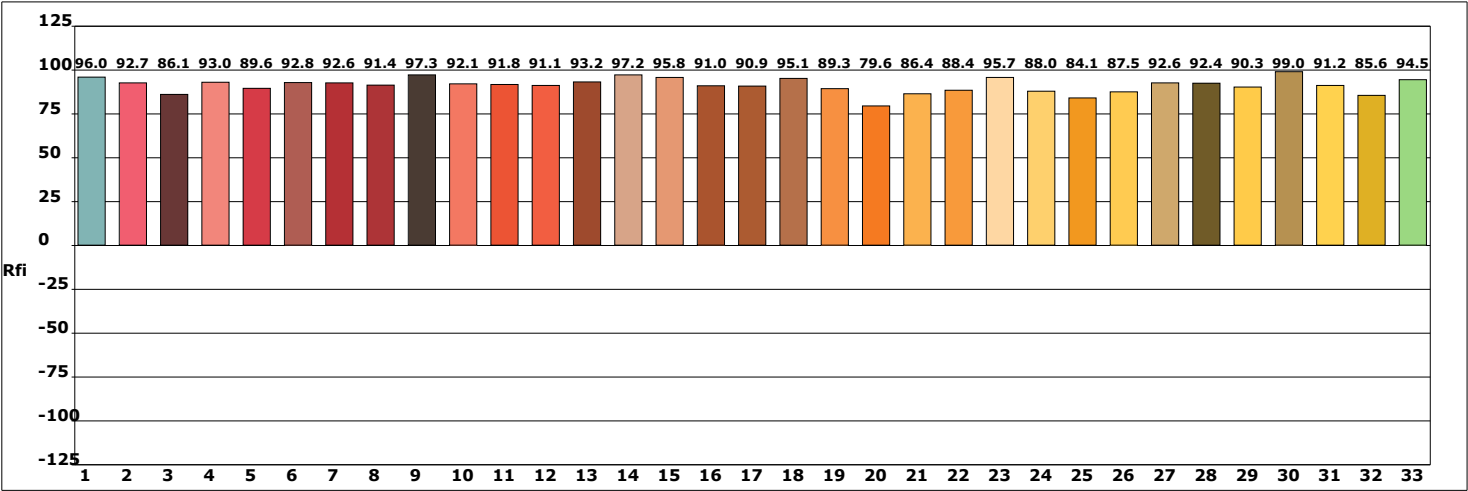

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:09/23/23