



光谱图

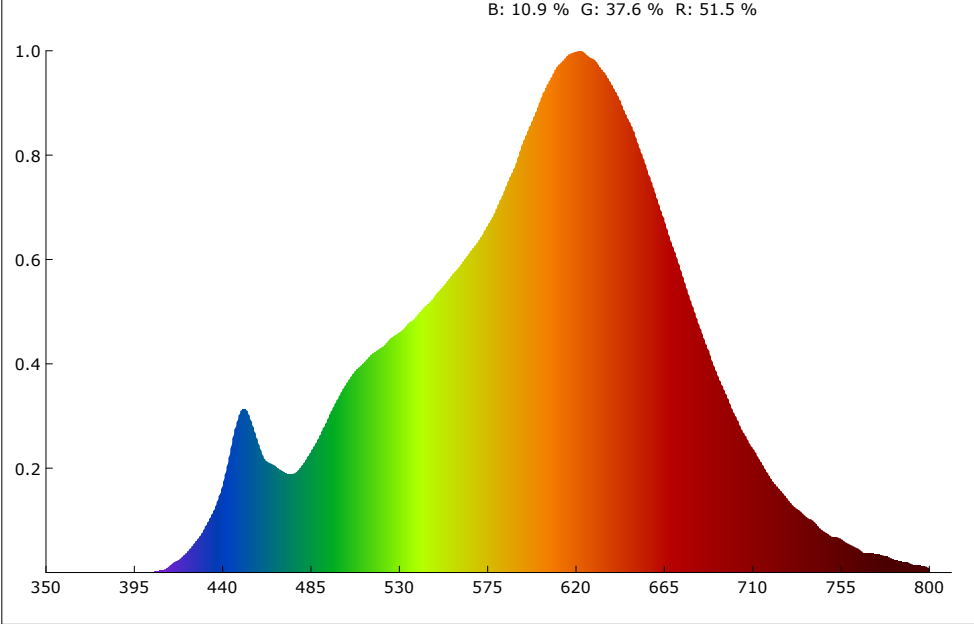

SDCM

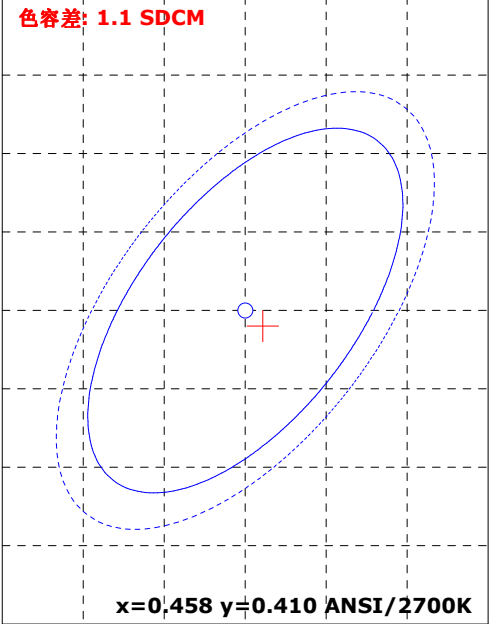

颜色参数:

坐标x: 0.4589 坐标y: 0.4091 坐标u: 0.2626 坐标v: 0.3511 坐标u': 0.2626 坐标v': 0.5267
红色比: 51.5 % 绿色比: 37.6 % 蓝色比: 10.9 % 光通量红色比: 26.0 % 光通量绿色比: 72.4 % 光通量蓝色比: 1.6 %

显色指数: 94.5 AvgR: 92.9
R1: 95.5 R2: 98.5 R3: 98.8 R4: 96.9 R5: 97.1 R6: 96.7 R7: 91.1 R8: 82.1
R9: 62.8 R10: 96.6 R11: 98.6 R12: 93.2 R13: 96.5 R14: 99.4 R15: 90.2


色温: 2700 K 光通量: 521.611 lm 峰值波长: 621.6 nm 色容差: 1.1
明暗视觉比: 1.3 中心波长: 610.8 nm 主波长: 584.4 nm 质心波长: 599.4 nm
半宽度: 137.7 nm 色偏差: -0.00048 色纯度: 60.6 % 色质指数: 89.3
LER(TM-30): 281.4 辐射功率: 1853.6 mw 色域指数(Rg): 99.4 逼真度(Rf): 93.6
红光辐射功率: 894.3 mw 近红辐射功率: 113.1 mw 远红辐射功率: 4.6 mw

电参数:





光效: 35.7 Lm/W 能效: 38.9 能效等级: G
电压: 220.6 V 电流: 0.086 A 功率: 14.610 W 功率因素: 0.767

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/13/23
备注:


Rf: 93.6 CCT: 2700K u': 0.2626
Rg: 99.4 LER: 281.4 Duv: -0.00048 v': 0.5267

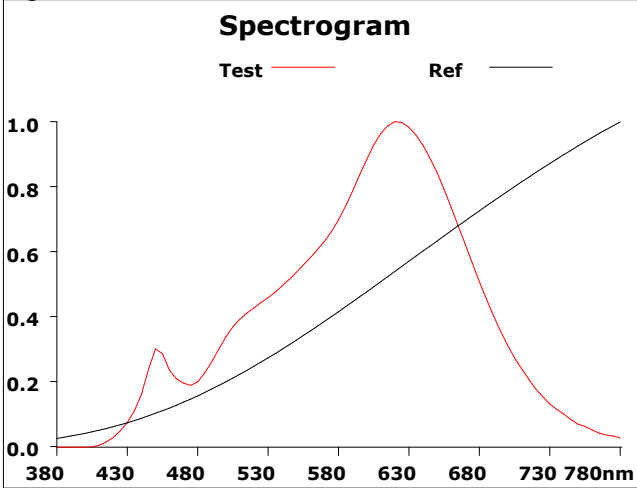


500			
Hue Bin	Rf	Chroma	Hue
1	91.3	-4.3%	0.1%
2	93.5	-2.4%	2.1%
3	93.0	-0.8%	3.1%
4	96.7	-0.7%	0.5%
5	96.6	0.2%	1.6%
6	95.7	1.7%	1.3%
7	96.4	-0.6%	-1.3%
8	98.1	0.8%	0.2%
9	97.2	-0.6%	1.1%
10	95.2	0.3%	2.3%
11	94.5	1.5%	3.0%
12	90.2	3.9%	-2.7%
13	89.3	2.1%	-7.3%
14	87.4	1.8%	-9.3%
15	91.9	-2.0%	-3.8%
16	86.7	-3.7%	-8.4%

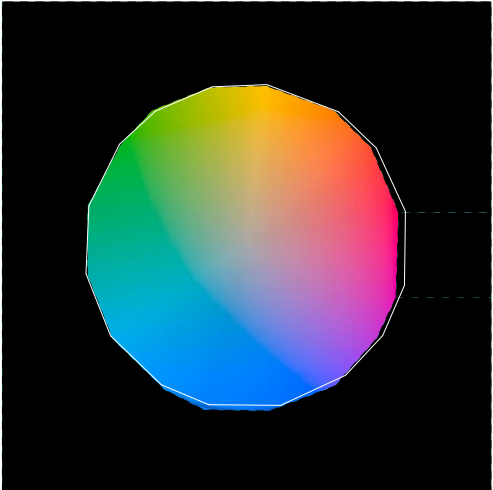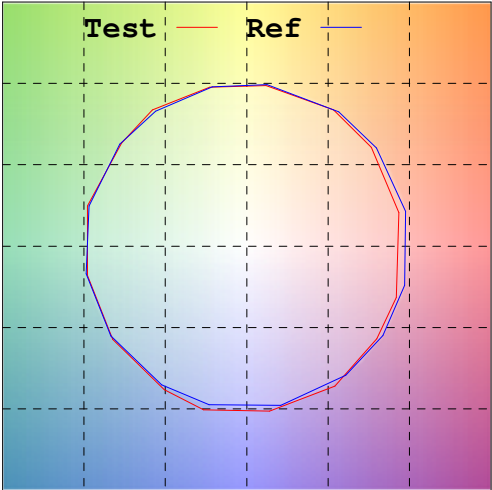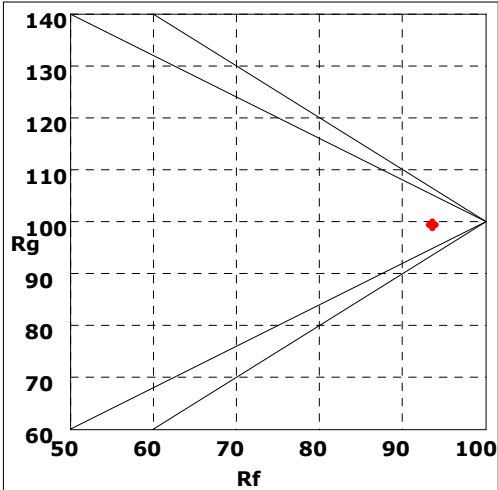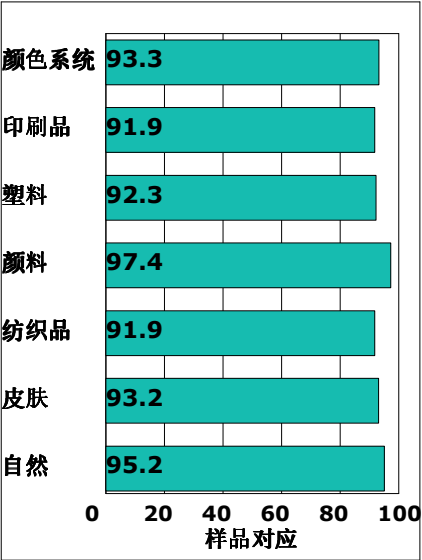

Rf by Bue



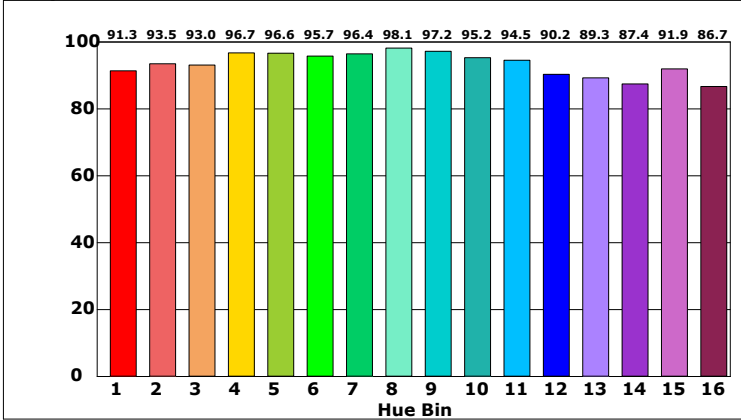


Chroma by Bue

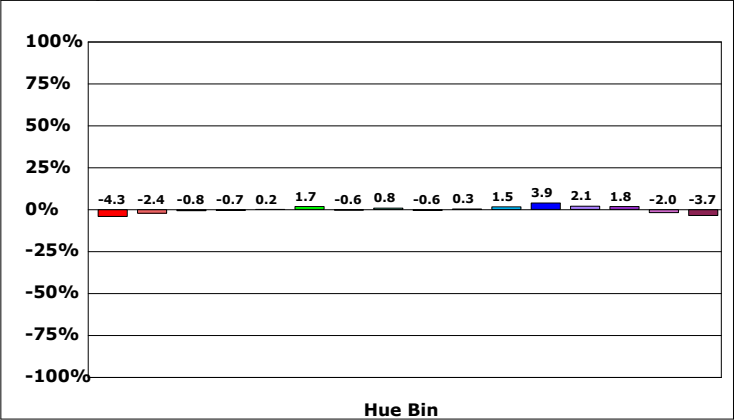

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/13/23

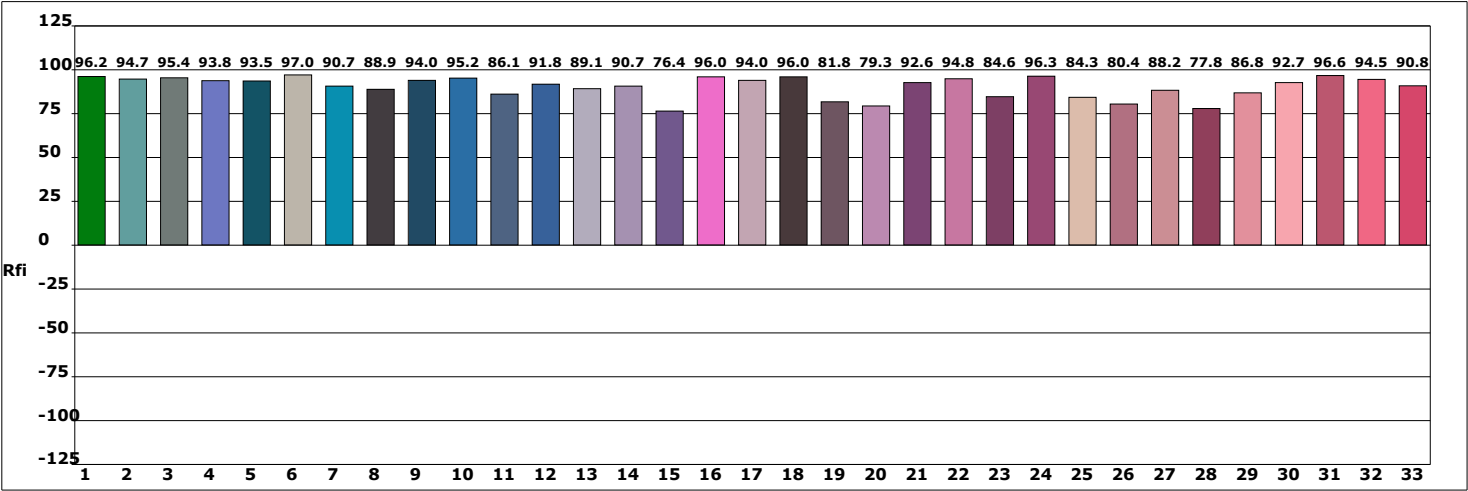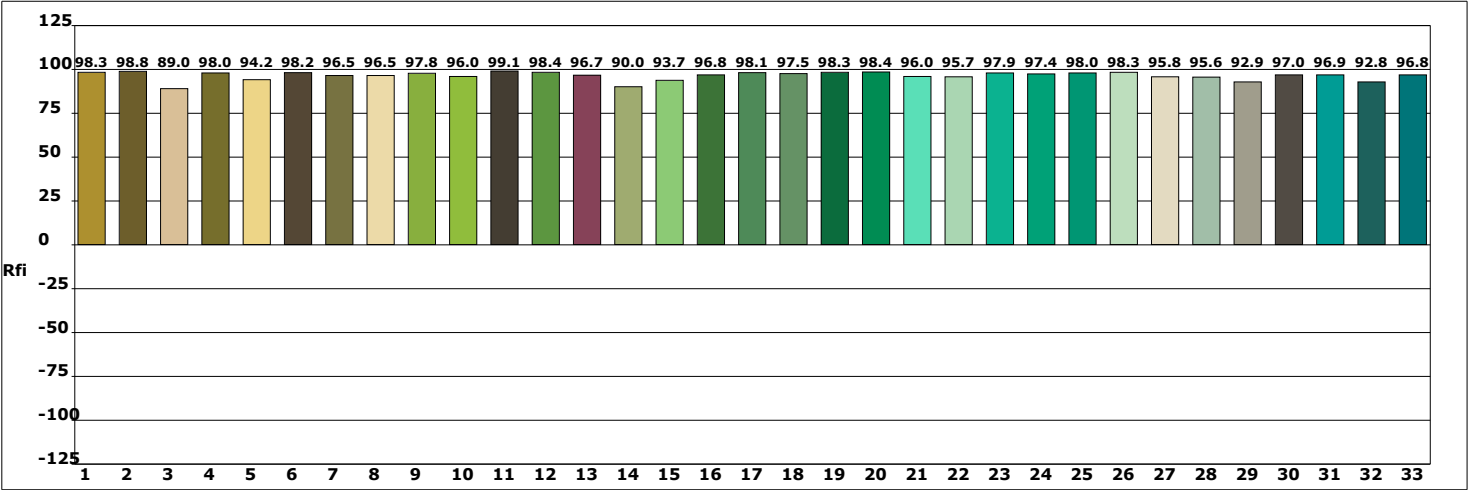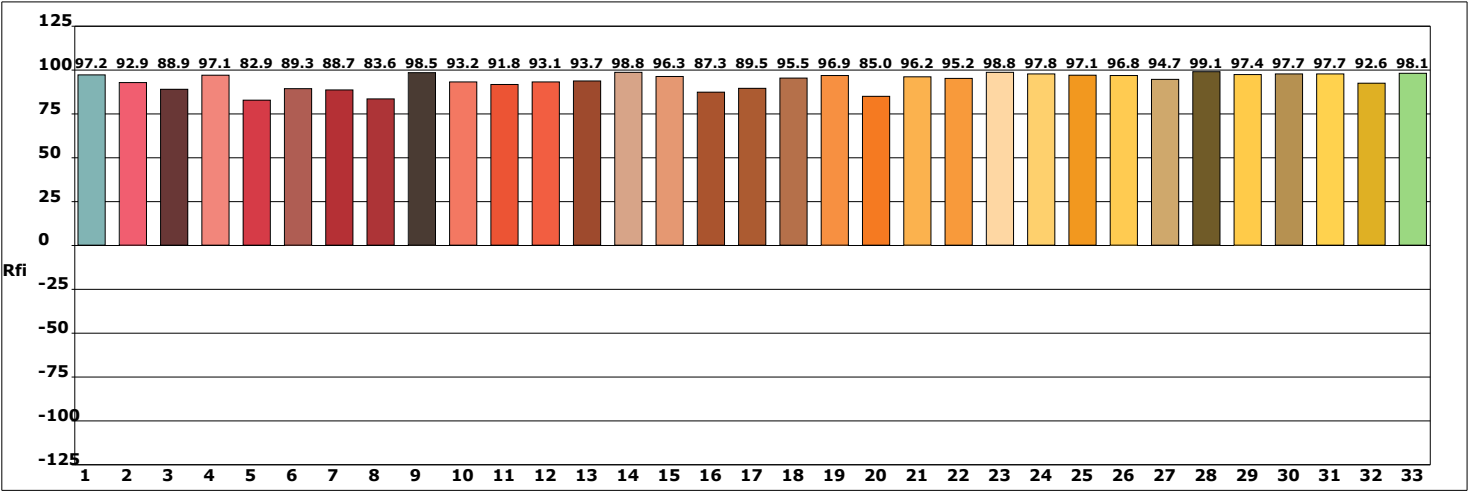

产品型号:

产品编号:

测试人员:


备注:

制造厂商:


测试单位:

测试日期:10/13/23

光谱图

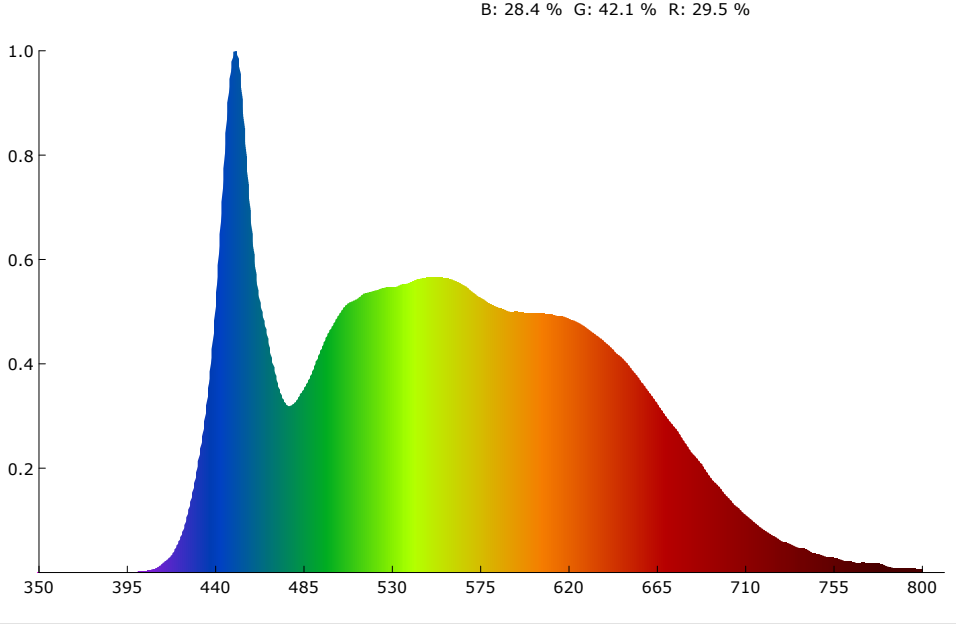

SDCM

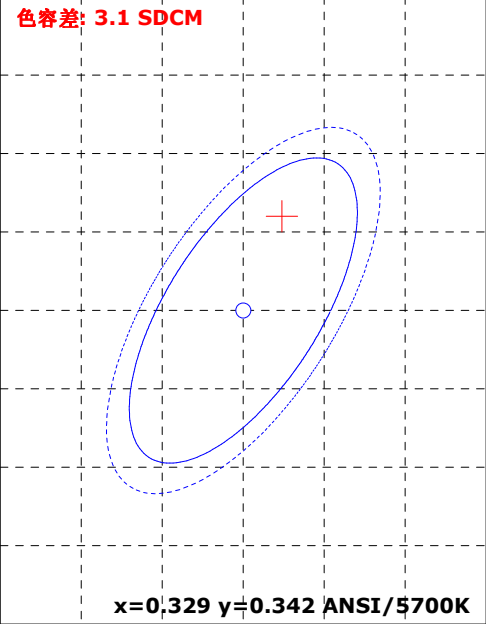

颜色参数:

坐标x: 0.3311 坐标y: 0.3477 坐标u: 0.2034 坐标v: 0.3205 坐标u': 0.2034 坐标v': 0.4807
红色比: 29.5 % 绿色比: 42.1 % 蓝色比: 28.4 % 光通量红色比: 15.4 % 光通量绿色比: 80.9 % 光通量蓝色比: 3.7 %

显色指数: 92.3 AvgR: 89.1
R1: 92.3 R2: 93.7 R3: 93.7 R4: 92.8 R5: 91.7 R6: 90.0 R7: 95.5 R8: 89.2
R9: 67.6 R10: 84.6 R11: 92.6 R12: 72.3 R13: 92.6 R14: 96.6 R15: 91.1


色温: 5557 K 光通量: 647.842 lm 峰值波长: 450.6 nm 色容差: 3.1
明暗视觉比: 2.2 中心波长: 451.9 nm 主波长: 546.3 nm 质心波长: 557.5 nm
半宽度: 23.2 nm 色偏差: 0.00401 色纯度: 3.8 % 色质指数: 91.9
LER(TM-30): 287.9 辐射功率: 2250.4 mw 色域指数(Rg): 99.2 逼真度(Rf): 90.2
红光辐射功率: 639.8 mw 近红辐射功率: 76.4 mw 远红辐射功率: 3.4 mw

电参数:





光效: 44.4 Lm/W 能效: 48.3 能效等级: G
电压: 220.7 V 电流: 0.086 A 功率: 14.600 W 功率因素: 0.766

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/13/23
备注:


Rf: 90.2 CCT: 5557K u': 0.2034
Rg: 99.2 LER: 287.9 Duv: 0.00401 v': 0.4807

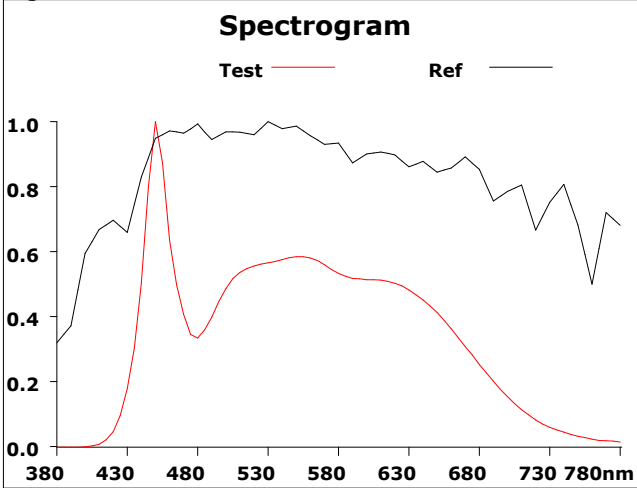


500			
Hue Bin	Rf	Chroma	Hue
1	89.1	-4.4%	-0.8%
2	93.2	-2.9%	1.9%
3	90.0	-1.9%	4.2%
4	92.1	-0.8%	3.0%
5	91.9	-0.9%	1.9%
6	96.1	1.3%	-0.0%
7	95.7	-1.7%	-0.9%
8	92.5	-3.6%	0.5%
9	90.5	-4.5%	5.9%
10	84.6	-2.4%	8.3%
11	81.4	1.9%	10.3%
12	92.5	2.7%	3.5%
13	92.2	5.4%	-0.9%
14	91.1	3.1%	-3.4%
15	82.5	7.0%	-12.1%
16	92.8	-1.6%	-3.2%

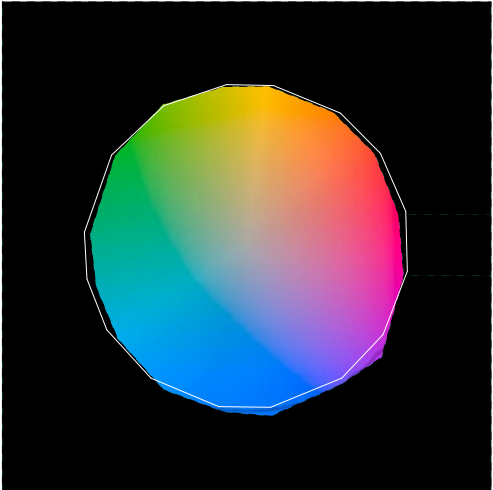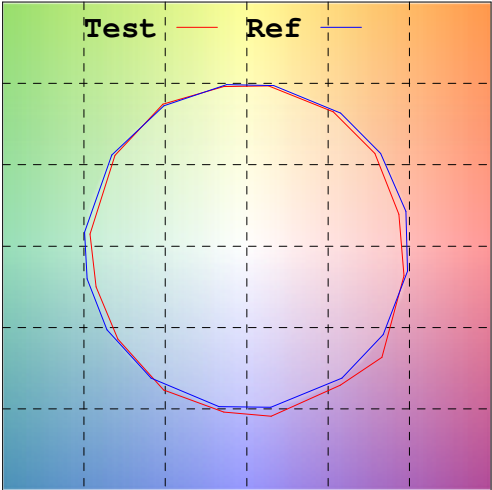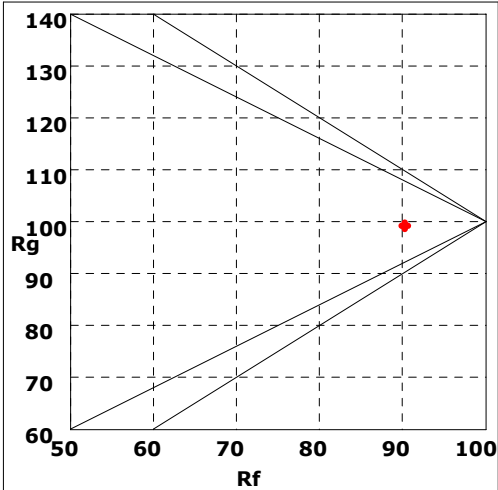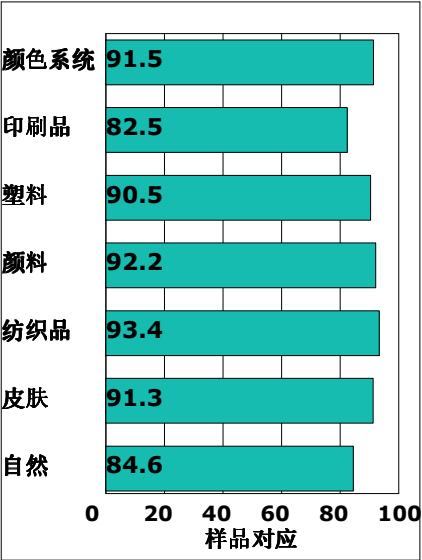




Rf by Bue

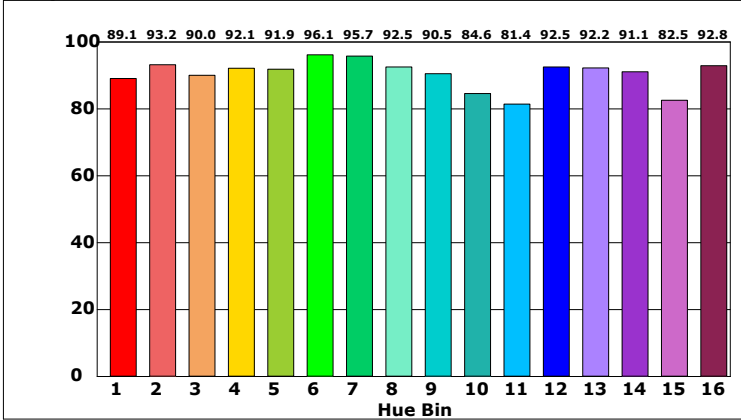

Chroma by Bue

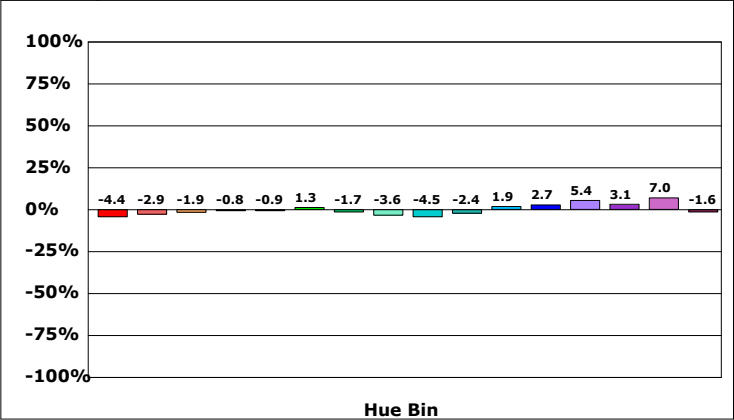


产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/13/23
备注:

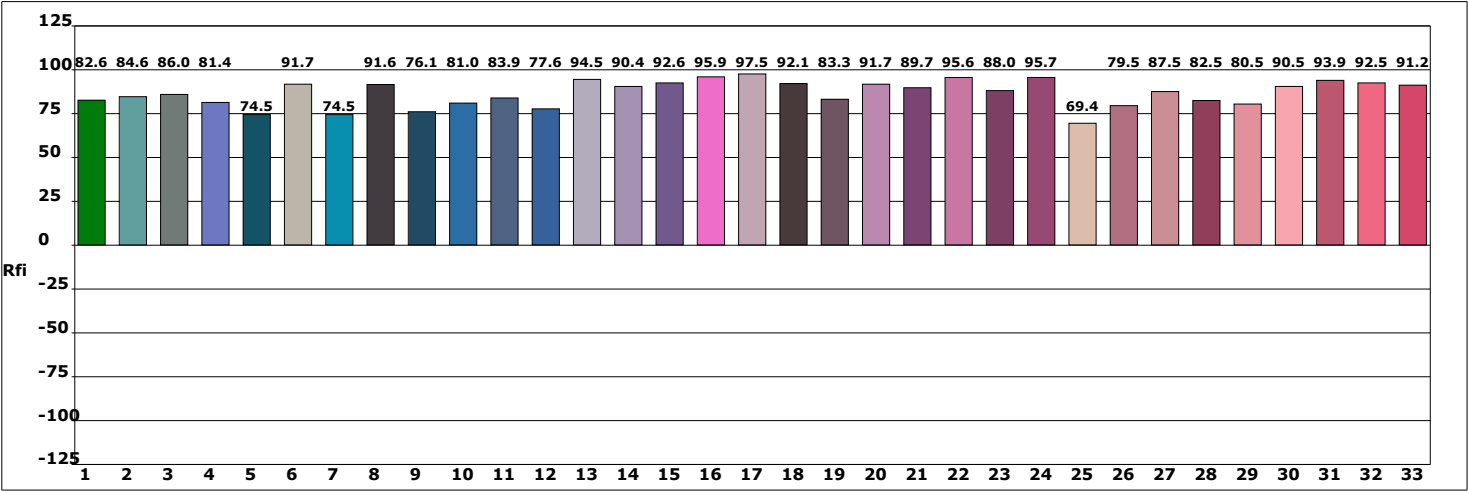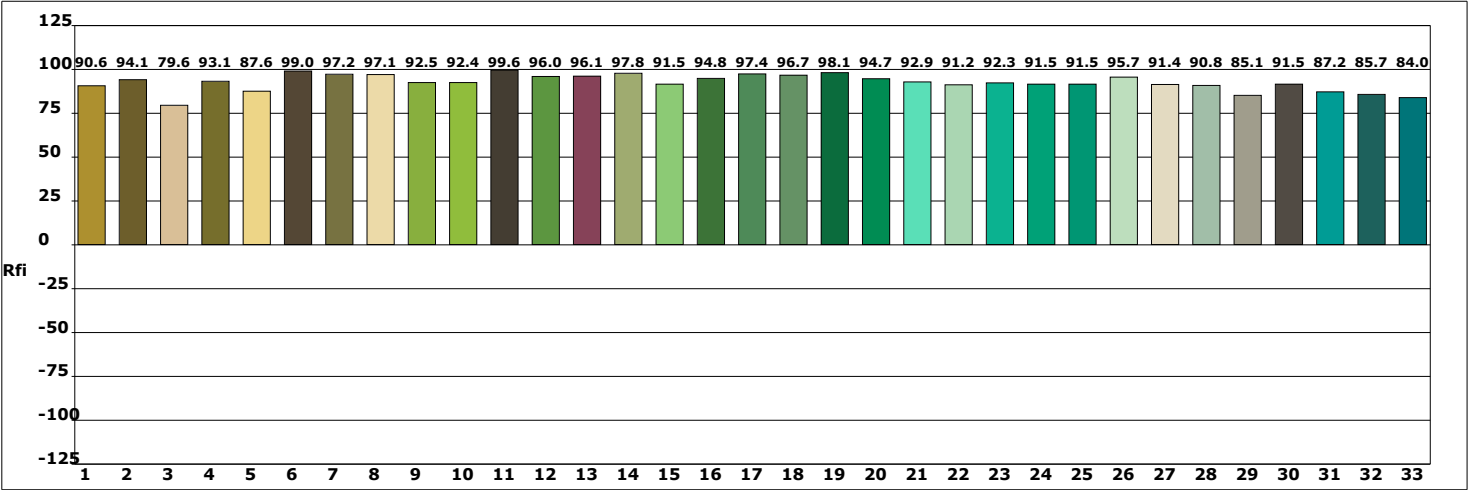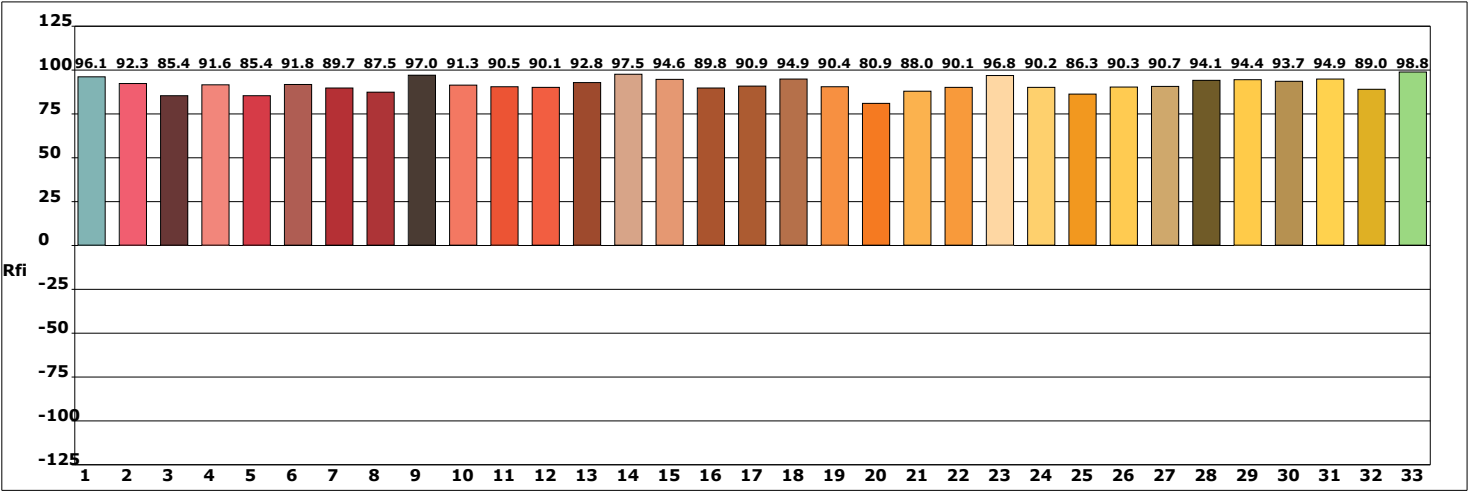


产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/13/23

光谱图

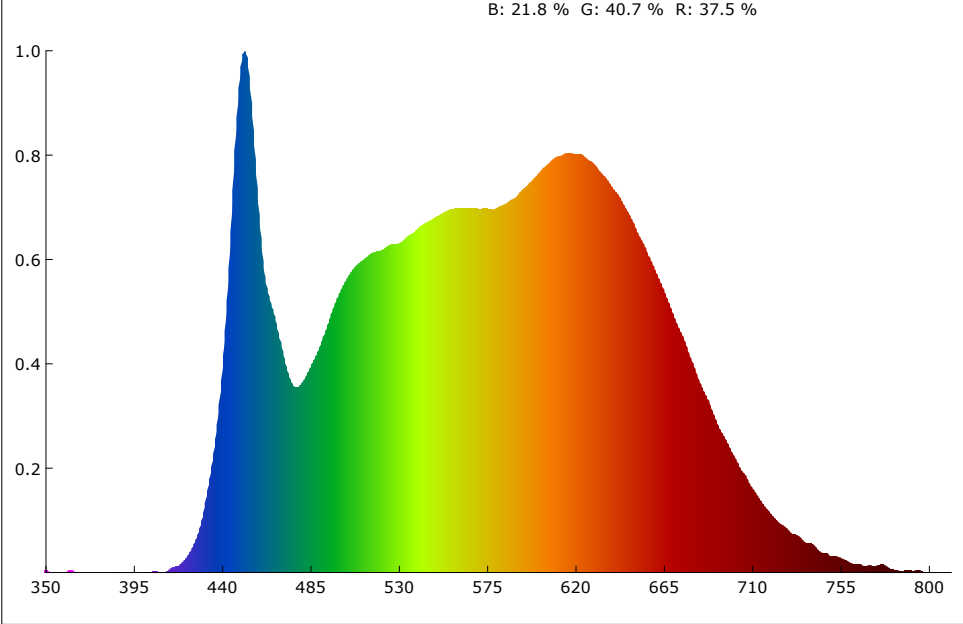

SDCM

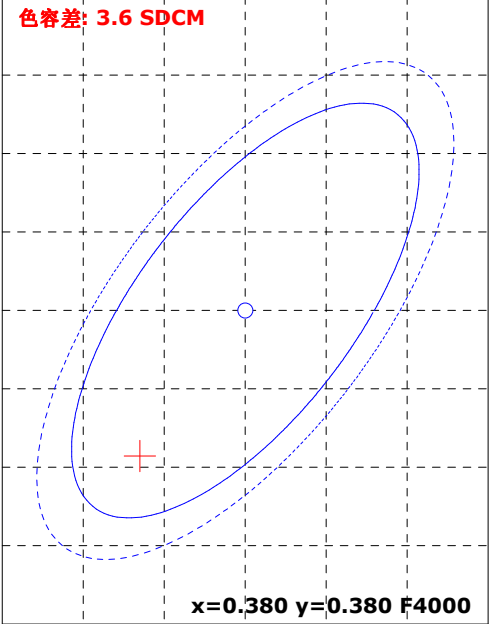

颜色参数:

坐标x: 0.3735 坐标y: 0.3707 坐标u: 0.2229 坐标v: 0.3319 坐标u': 0.2229 坐标v': 0.4979
红色比: 37.5 % 绿色比: 40.7 % 蓝色比: 21.8 % 光通量红色比: 19.2 % 光通量绿色比: 77.7 % 光通量蓝色比: 3.0 %

显色指数: 96.3 AvgR: 94.2
R1: 97.4 R2: 98.5 R3: 97.3 R4: 96.9 R5: 96.4 R6: 95.5 R7: 96.4 R8: 92.5
R9: 81.8 R10: 95.1 R11: 97.1 R12: 75.7 R13: 98.3 R14: 98.1 R15: 95.9


色温: 4154 K 光通量: 286.086 lm 峰值波长: 451.8 nm 色容差: 3.6
明暗视觉比: 1.9 中心波长: 454.5 nm 主波长: 579.0 nm 质心波长: 571.6 nm
半宽度: 23.9 nm 色偏差: -0.00076 色纯度: 23.3 % 色质指数: 90.9
LER(TM-30): 290.6 辐射功率: 984.4 mw 色域指数(Rg): 99.4 逼真度(Rf): 91.5
红光辐射功率: 356.5 mw 近红辐射功率: 33.7 mw 远红辐射功率: 0.5 mw

电参数:







光效: 29.2 Lm/W 能效: 31.8 能效等级: G
电压: 220.7 V 电流: 0.070 A 功率: 9.790 W 功率因素: 0.635

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/13/23
备注:

Rf: 91.5 CCT: 4154K u': 0.2229
Rg: 99.4 LER: 290.6 Duv: -0.00076 v': 0.4979



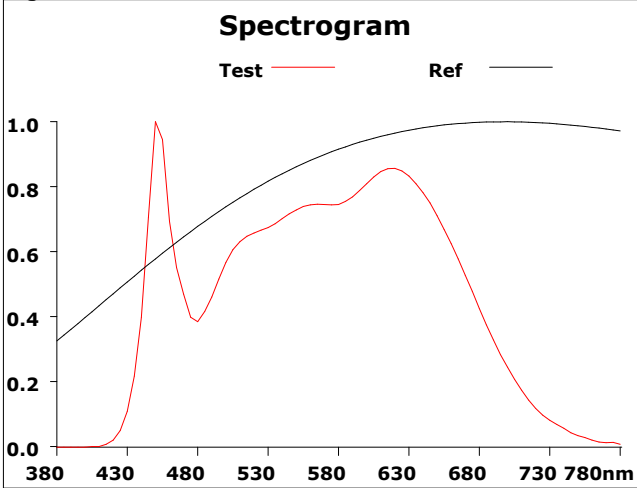


500			
Hue Bin	Rf	Chroma	Hue
1	92.6	-2.6%	0.2%
2	95.7	-1.0%	0.7%
3	94.2	-0.9%	1.8%
4	93.4	-2.2%	-0.4%
5	92.2	-3.9%	0.1%
6	96.7	-0.7%	0.5%
7	94.7	-2.5%	1.6%
8	93.4	-1.8%	3.2%
9	89.9	-1.1%	6.7%
10	87.8	-0.6%	6.9%
11	85.4	4.0%	8.0%
12	91.1	3.9%	1.8%
13	91.2	4.2%	-3.8%
14	94.3	0.9%	-1.4%
15	87.4	1.5%	-6.4%
16	87.5	0.5%	-6.6%

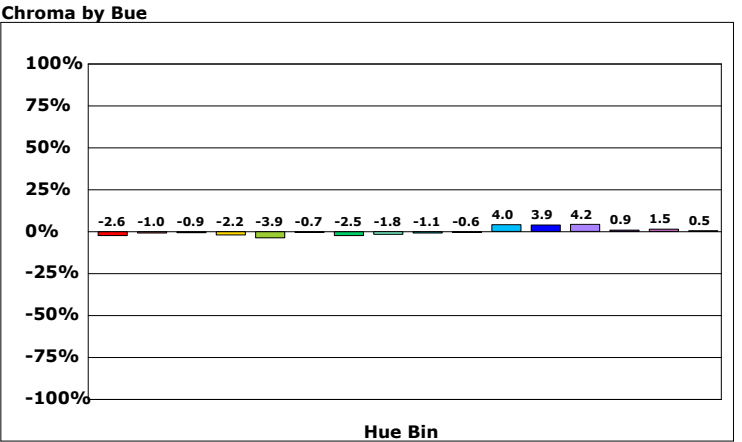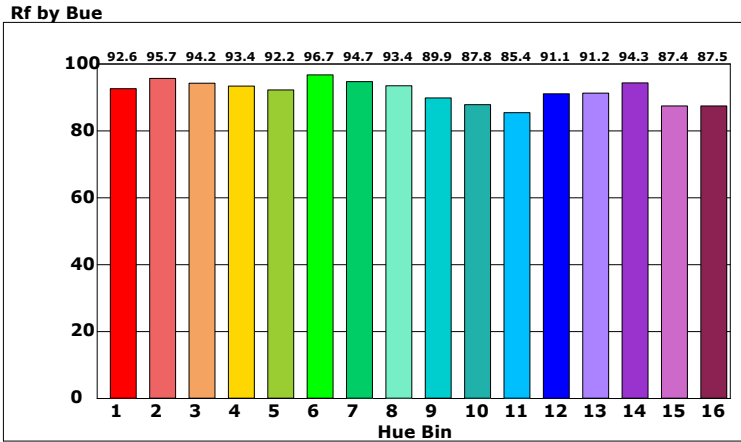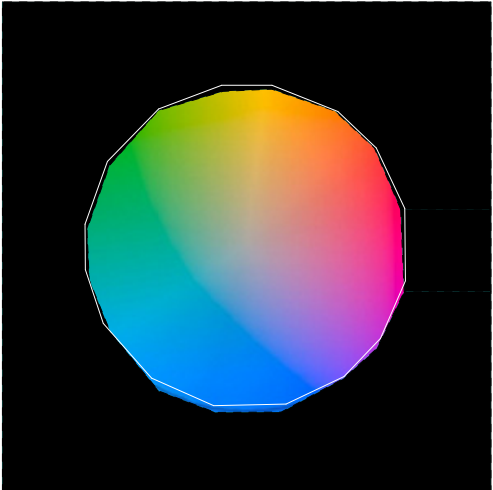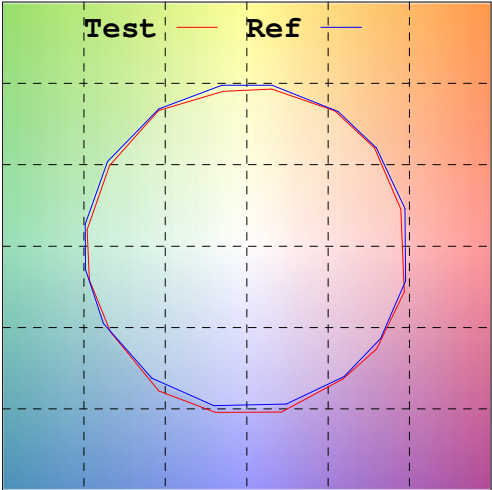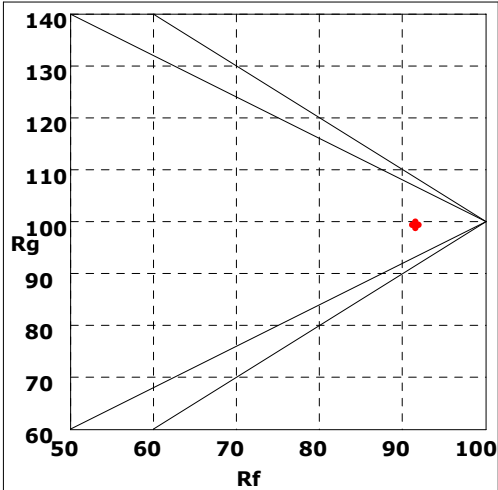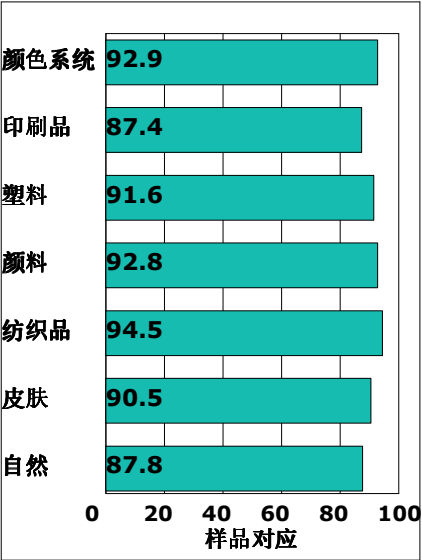

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/13/23

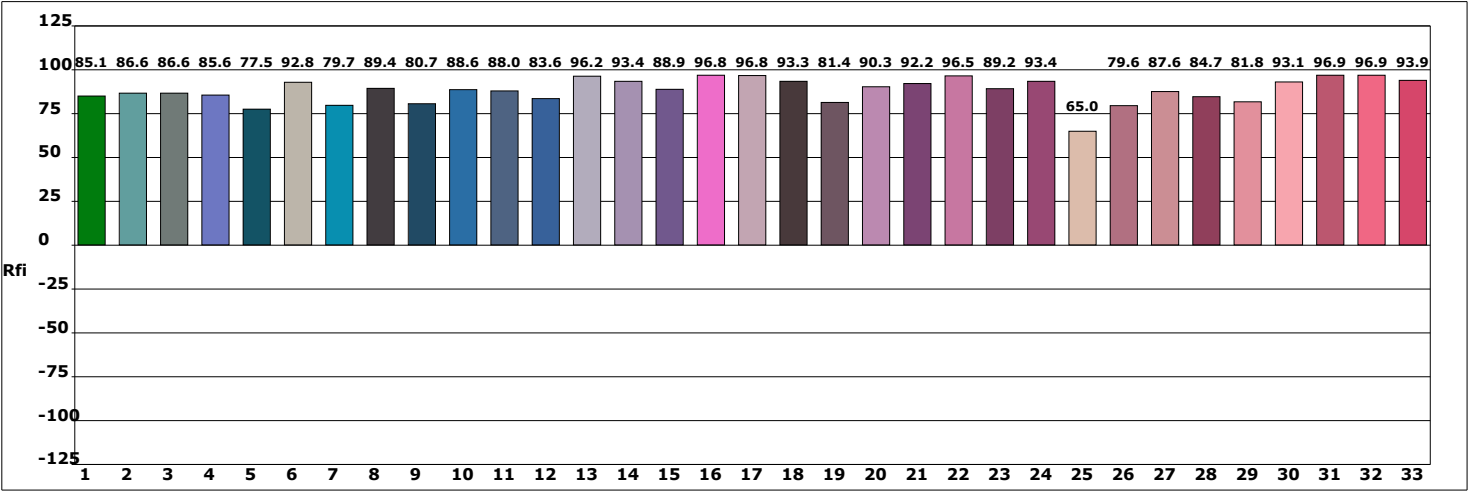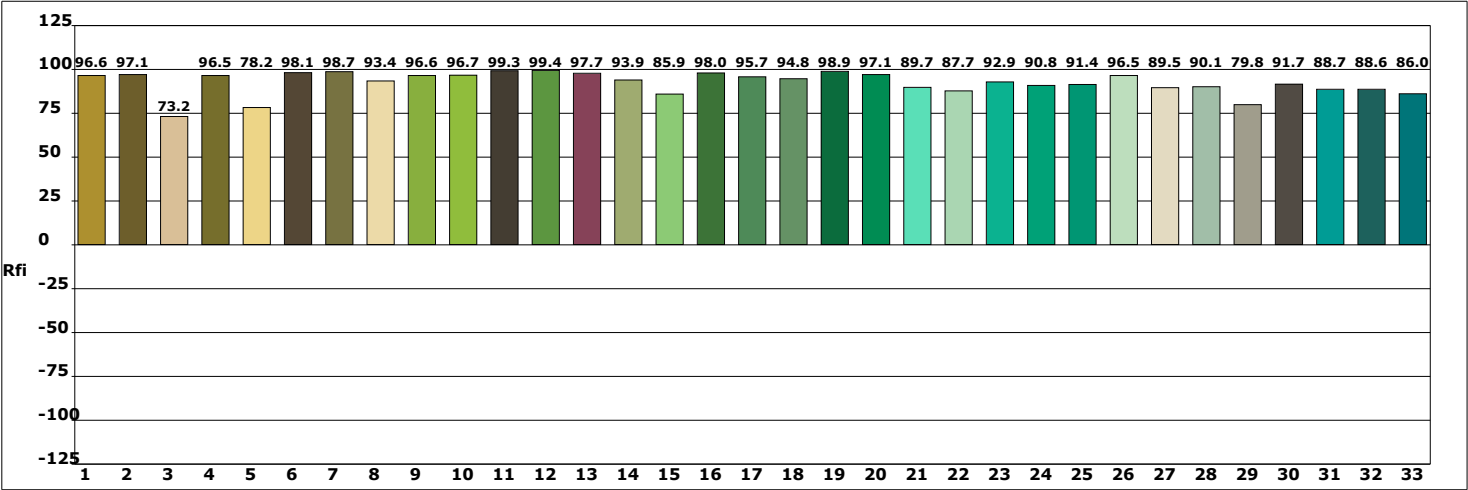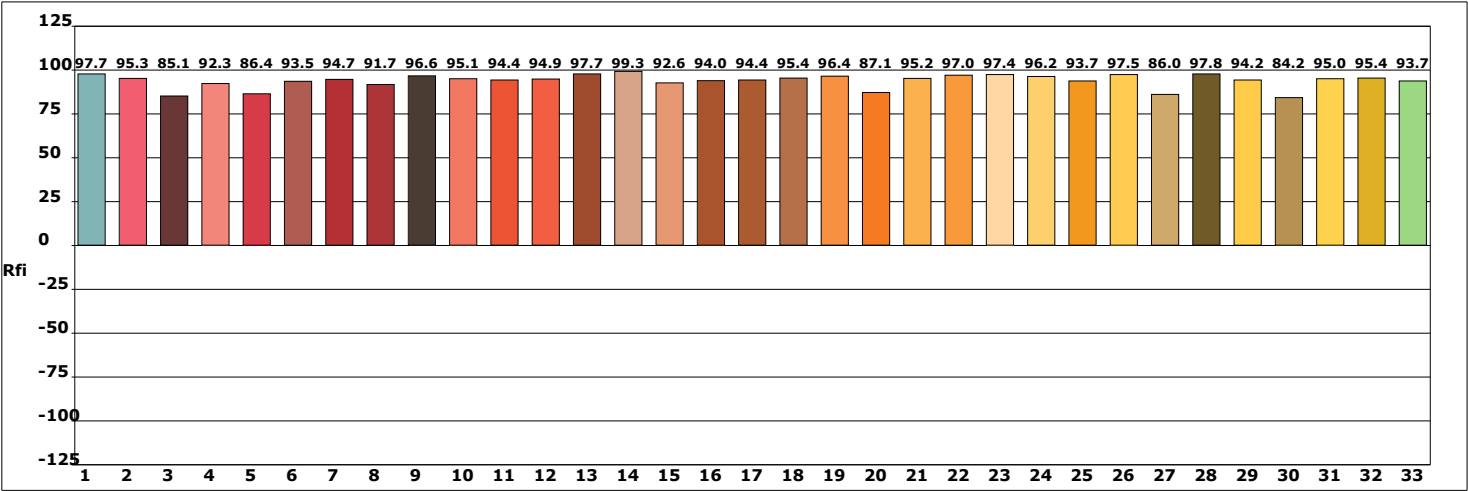

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/13/23