



光谱图

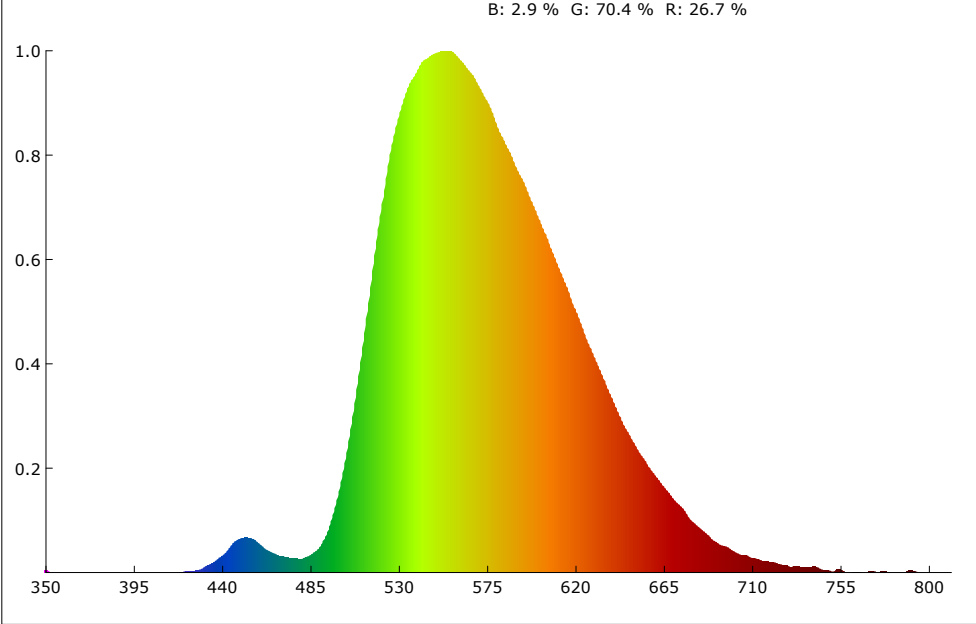

SDCM

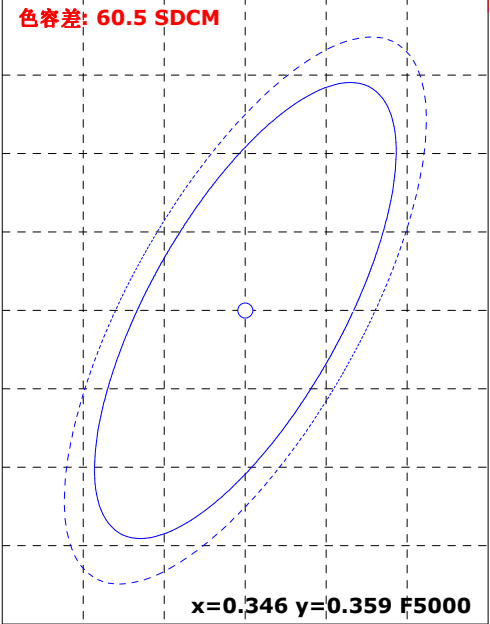

颜色参数:

坐标x: 0.4247 坐标y: 0.5348 坐标u: 0.1983 坐标v: 0.3745 坐标u': 0.1983 坐标v': 0.5617
红色比: 26.7 % 绿色比: 70.4 % 蓝色比: 2.9 % 光通量红色比: 11.5 % 光通量绿色比: 88.3 % 光通量蓝色比: 0.2 %


显色指数: 50.3 AvgR: 32.9
R1: 41.5 R2: 57.4 R3: 72.2 R4: 38.2 R5: 40.4 R6: 47.0 R7: 76.1 R8: 30.1
R9: -99.0 R10: 7.5 R11: 21.1 R12: 3.7 R13: 43.1 R14: 86.1 R15: 28.5

色温: 3980 K 光通量: 877.930 lm 峰值波长: 556.5 nm 色容差: 60.5
明暗视觉比: 1.2 中心波长: 566.9 nm 主波长: 569.0 nm 质心波长: 573.6 nm
半宽度: 105.8 nm 色偏差: 0.04823 色纯度: 88.2 % 色质指数: 56.0
LER(TM-30): 470.1 辐射功率: 1867.4 mw 色域指数(Rg): 58.2 逼真度(Rf): 52.3
红光辐射功率: 494.2 mw 近红辐射功率: 16.5 mw 远红辐射功率: 0.4 mw





电参数:

光效: 12.1 Lm/W 能效: 13.2 能效等级: G
电压: 222.2 V 电流: 0.523 A 功率: 72.390 W 功率因素: 0.622


Rf: 52.3 CCT: 3980K u': 0.1983
Rg: 58.2 LER: 470.1 Duv: 0.04823 v': 0.5617

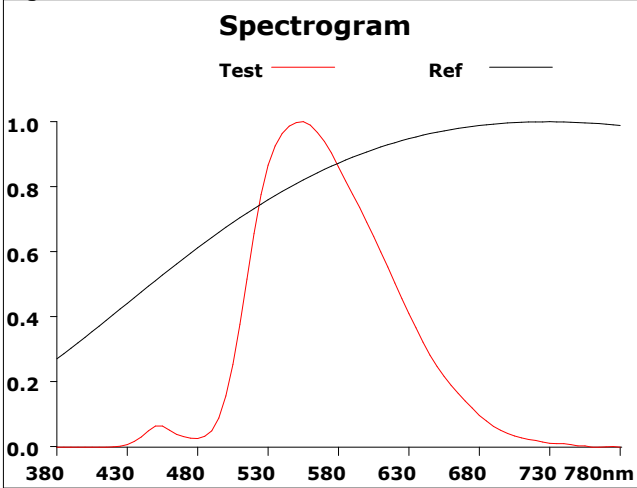


500			
Hue Bin	Rf	Chroma	Hue
1	48.4	-26.2%	-2.7%
2	53.6	-22.2%	-4.8%
3	39.9	-28.6%	-4.4%
4	46.1	-31.3%	-1.9%
5	45.6	-36.5%	4.9%
6	42.6	-35.1%	9.7%
7	41.7	-31.9%	15.9%
8	48.0	-25.6%	13.2%
9	57.0	-22.6%	18.1%
10	43.5	-21.9%	23.5%
11	64.3	-12.5%	16.3%
12	68.5	-11.2%	7.7%
13	72.0	-13.9%	-4.3%
14	73.5	-10.5%	-6.0%
15	60.3	-18.6%	-10.8%
16	55.9	-19.9%	-8.2%

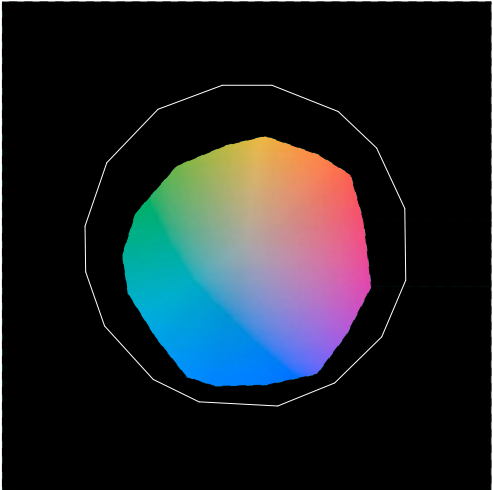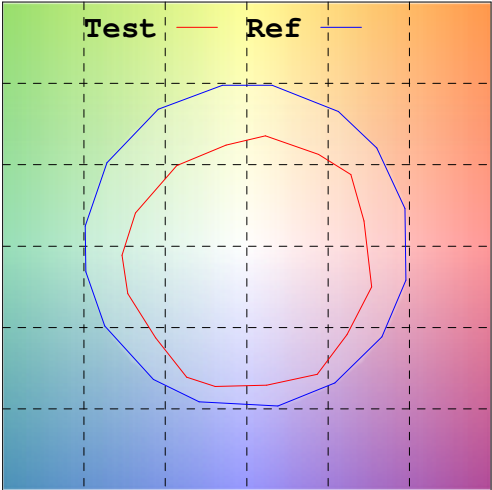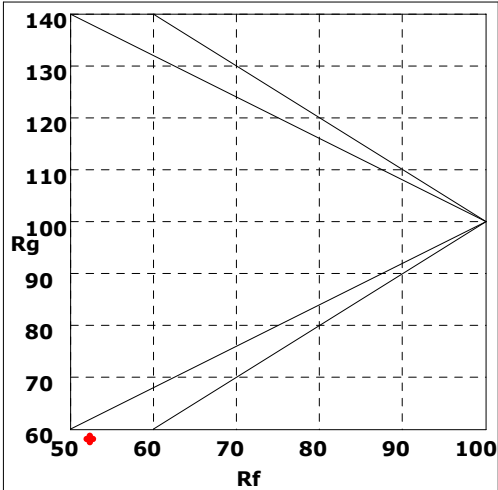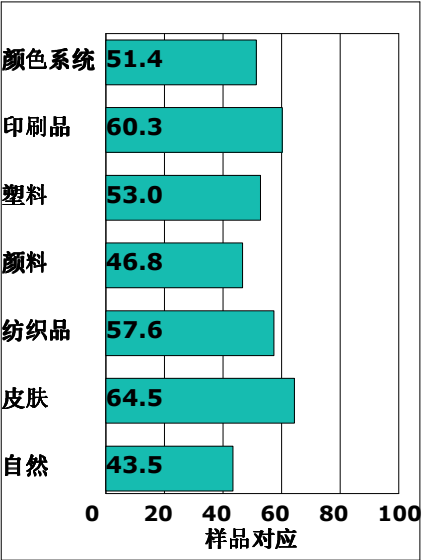

Rf by Bue

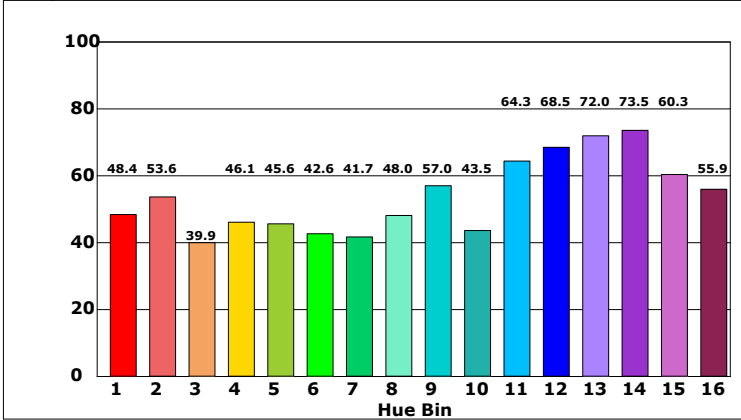

Chroma by Bue

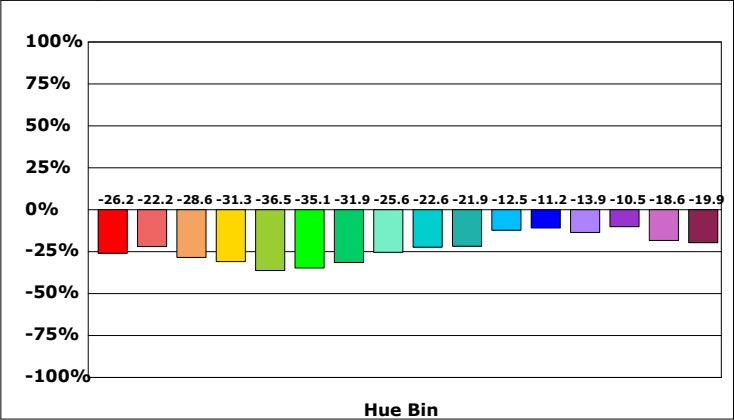

产品型号:P19
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:08/10/12

