



光谱图

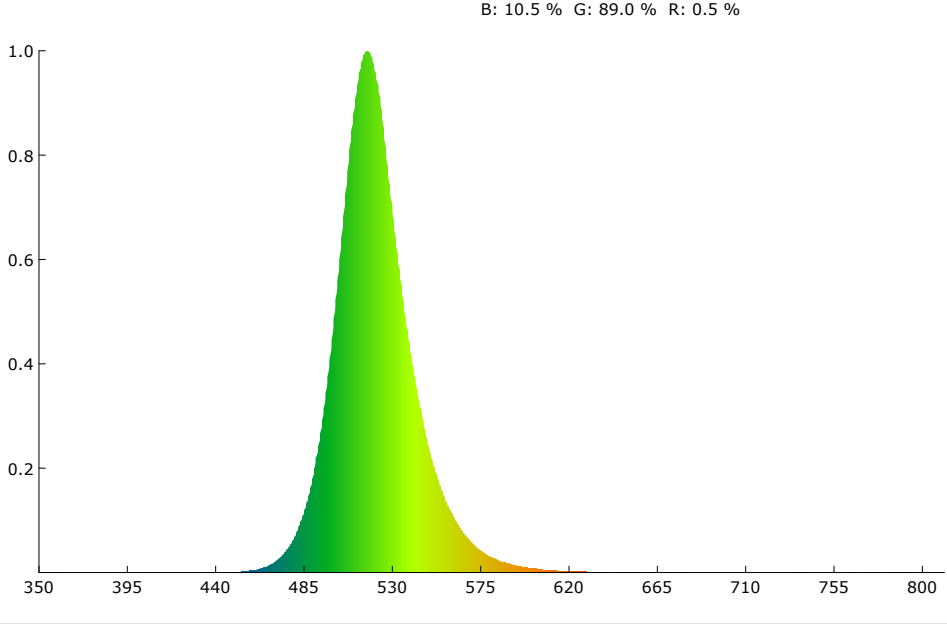

SDCM

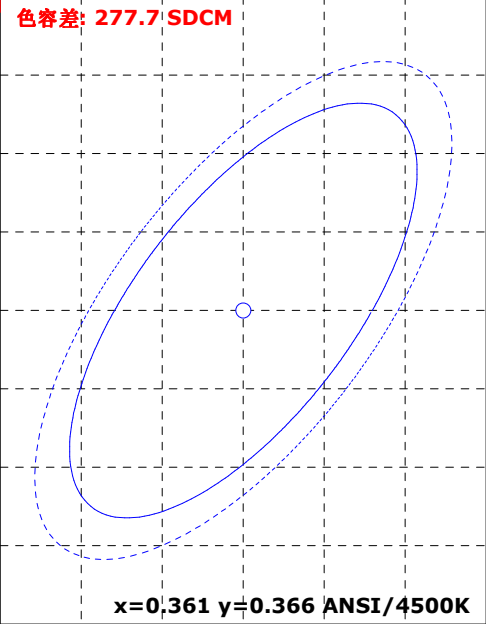

颜色参数:

坐标x: 0.1553      坐标y: 0.7067      坐标u: 0.0556      坐标v: 0.3796      坐标u': 0.0556      坐标v': 0.5694  
红色比: 0.5 %      绿色比: 89.0 %      蓝色比: 10.5 %      光通量红色比: 0.3 %      光通量绿色比: 98.8 %      光通量蓝色比: 1.0 %


显色指数: -20.9      AvgR: -33.7  
R1: -33.0      R2: -4.9      R3: -17.0      R4: -62.7      R5: -8.4      R6: -11.5      R7: -2.0      R8: -28.4  
R9: -99.0      R10: -97.4      R11: -89.2      R12: -23.9      R13: -38.7      R14: 41.6      R15: -30.9

色温: 8293 K      光通量: 731.901 lm      峰值波长: 517.7 nm      色容差: 277.7  
明暗视觉比: 3.1      中心波长: 518.9 nm      主波长: 522.7 nm      质心波长: 522.3 nm  
半宽度: 35.4 nm      色偏差: 0.15947      色纯度: 74.9 %      色质指数: 0.3  
LER(TM-30): 457.0      辐射功率: 1601.5 mw      色域指数(Rg): 9.4      逼真度(Rf): 1.1  
红光辐射功率: 7.7 mw      近红辐射功率: 0.6 mw      远红辐射功率: 0.6 mw




电参数:

光效: 9.4 Lm/W      能效: 10.2      能效等级: G  
电压: 222.1 V      电流: 0.559 A      功率: 77.780 W      功率因素: 0.626


Rf: 1.1 CCT: 8293K u': 0.0556  
Rg: 9.4 LER: 457.0 Duv: 0.15947 v': 0.5694

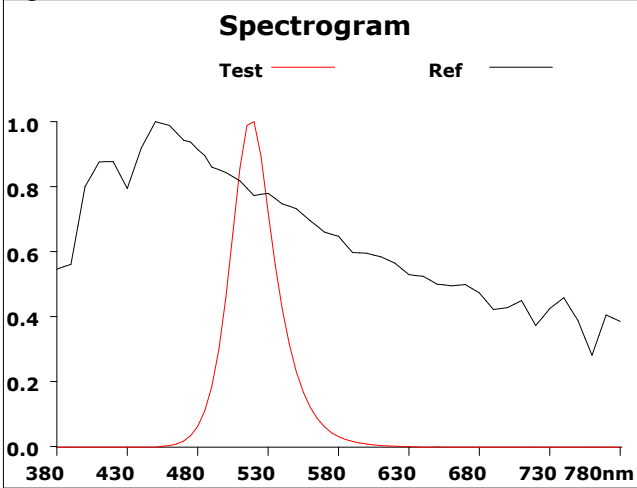


| 500     |      |        |        |
|---------|------|--------|--------|
| Hue Bin | Rf   | Chroma | Hue    |
| 1       | 0.0  | -84.1% | -0.7%  |
| 2       | 0.0  | -70.1% | 4.5%   |
| 3       | 0.3  | -72.8% | -2.1%  |
| 4       | 3.9  | -55.9% | -8.6%  |
| 5       | 1.4  | -70.7% | -3.1%  |
| 6       | 0.9  | -77.2% | -2.4%  |
| 7       | 0.5  | -72.5% | 1.4%   |
| 8       | 0.1  | -77.5% | 11.7%  |
| 9       | 15.4 | -62.4% | 30.8%  |
| 10      | 12.4 | -48.1% | 21.3%  |
| 11      | 4.2  | -44.3% | 5.3%   |
| 12      | 28.6 | -41.9% | -20.4% |
| 13      | 23.8 | -51.5% | -26.5% |
| 14      | 0.2  | -64.0% | -41.9% |
| 15      | 3.0  | -77.9% | -51.3% |
| 16      | 0.0  | -80.7% | -20.9% |

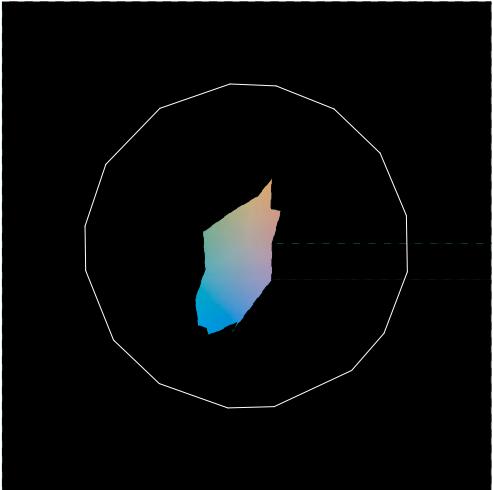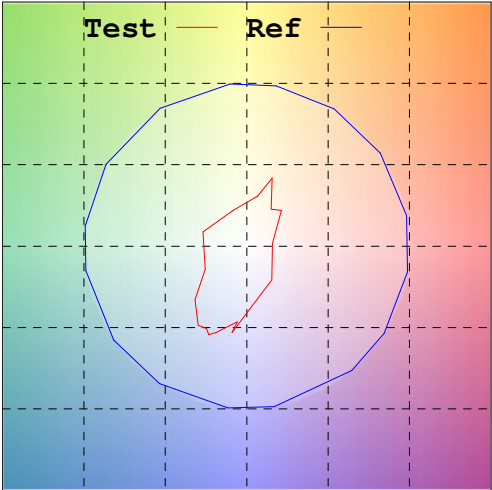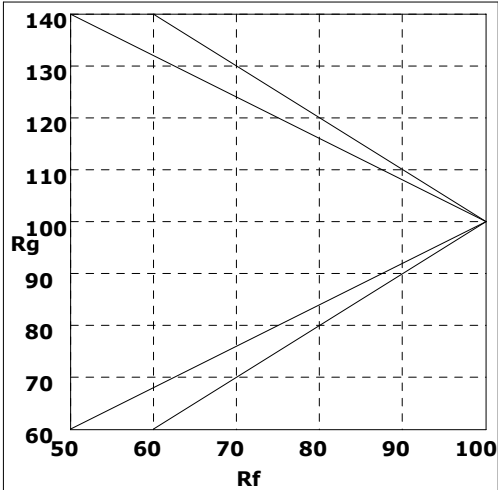

Rf by Bue

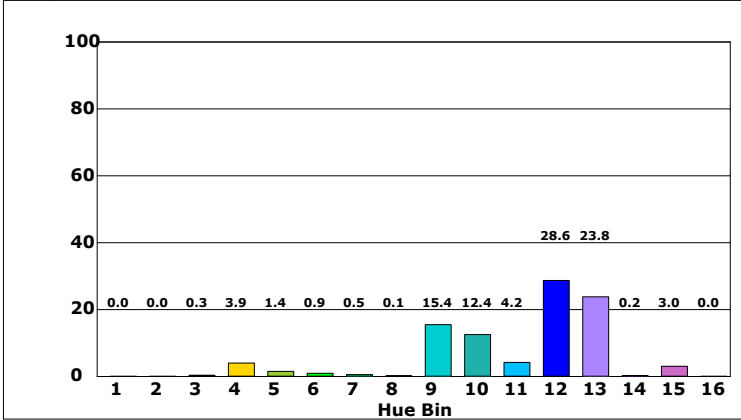

Chroma by Bue

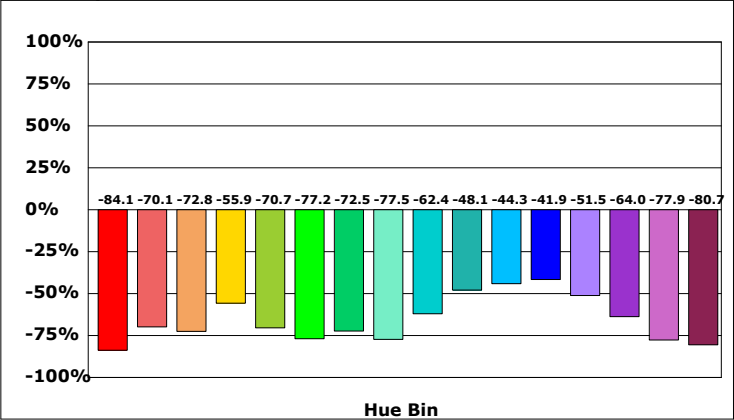

产品型号:P19  
产品编号:  
测试人员:  
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd  
测试单位:  
测试日期:08/10/12

