



光谱图

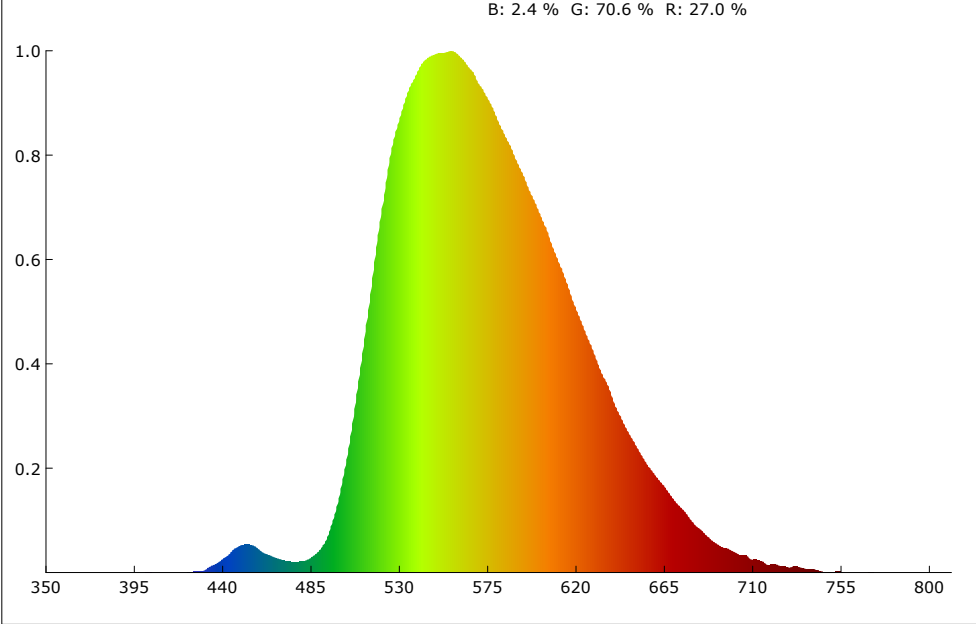

SDCM

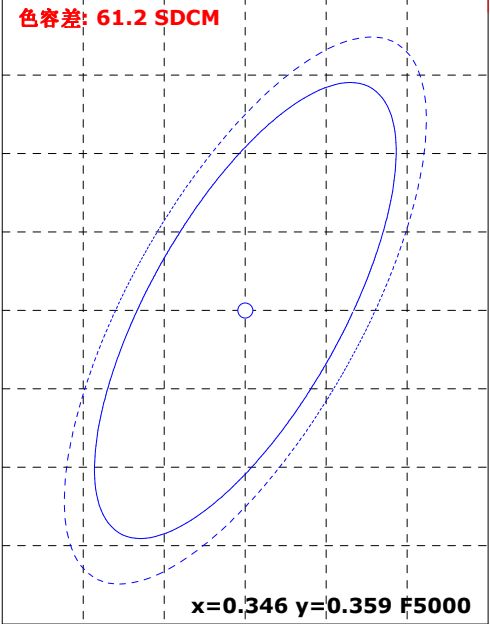

颜色参数:

坐标x: 0.4286 坐标y: 0.5367 坐标u: 0.1997 坐标v: 0.3752 坐标u': 0.1997 坐标v': 0.5628
红色比: 27.0 % 绿色比: 70.6 % 蓝色比: 2.4 % 光通量红色比: 11.6 % 光通量绿色比: 88.2 % 光通量蓝色比: 0.2 %


显色指数: 48.5 AvgR: 31.4
R1: 41.8 R2: 56.6 R3: 67.7 R4: 34.1 R5: 39.5 R6: 46.3 R7: 72.9 R8: 29.4
R9: -99.0 R10: 6.0 R11: 16.0 R12: 3.8 R13: 43.2 R14: 83.8 R15: 28.5

色温: 3933 K 光通量: 934.356 lm 峰值波长: 556.5 nm 色容差: 61.2
明暗视觉比: 1.2 中心波长: 567.3 nm 主波长: 569.3 nm 质心波长: 574.3 nm
半宽度: 105.6 nm 色偏差: 0.04803 色纯度: 89.9 % 色质指数: 50.8
LER(TM-30): 473.5 辐射功率: 1973.5 mw 色域指数(Rg): 54.6 逼真度(Rf): 48.5
红光辐射功率: 529.7 mw 近红辐射功率: 14.4 mw 远红辐射功率: 0.0 mw





电参数:

光效: 13.0 Lm/W 能效: 14.1 能效等级: G
电压: 222.0 V 电流: 0.523 A 功率: 72.040 W 功率因素: 0.620


Rf: 48.5 CCT: 3933K u': 0.1997
Rg: 54.6 LER: 473.5 Duv: 0.04803 v': 0.5628

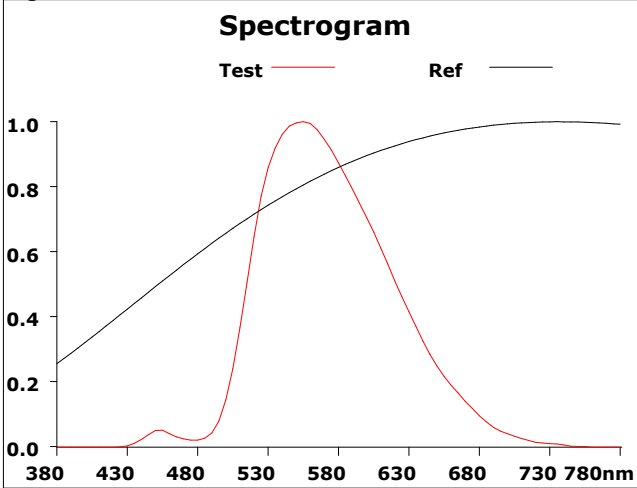


500			
Hue Bin	Rf	Chroma	Hue
1	47.8	-26.3%	-2.3%
2	51.8	-22.8%	-6.7%
3	34.1	-31.1%	-7.5%
4	38.4	-35.8%	-4.1%
5	37.8	-42.2%	4.9%
6	34.5	-39.9%	12.8%
7	34.1	-34.9%	20.5%
8	43.8	-26.5%	16.4%
9	55.5	-22.5%	19.8%
10	43.7	-22.4%	22.9%
11	63.9	-14.4%	14.5%
12	64.4	-14.2%	6.5%
13	67.4	-18.3%	-3.7%
14	77.8	-8.8%	-3.7%
15	58.2	-20.8%	-3.9%
16	55.3	-20.9%	-5.2%

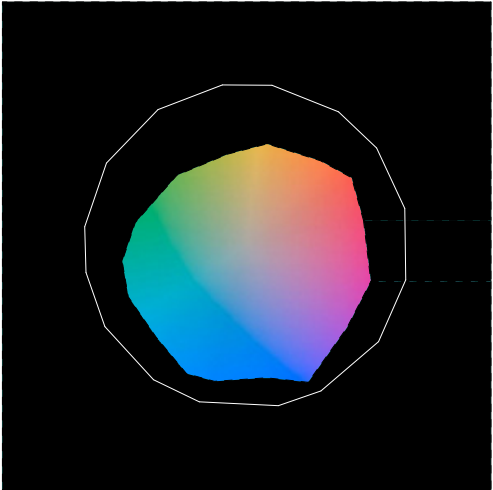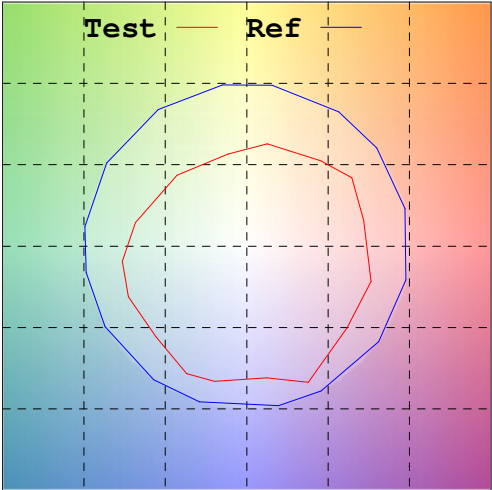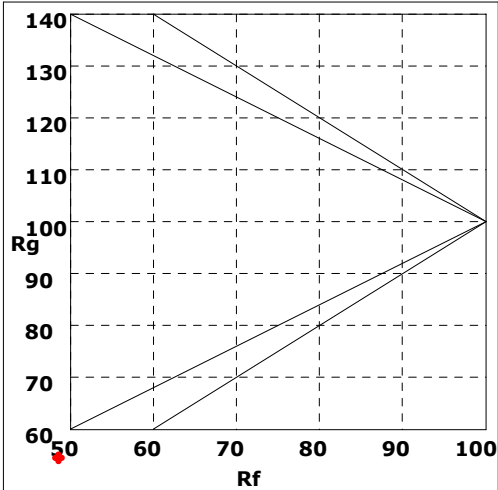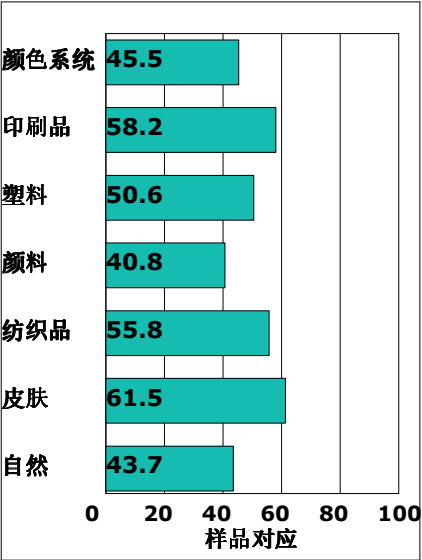

Rf by Bue

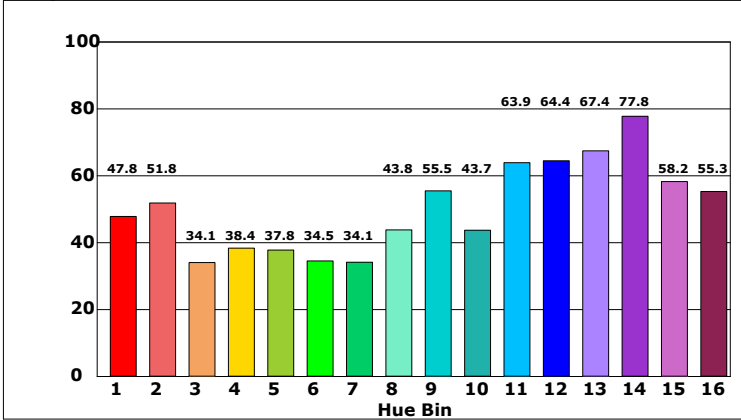

Chroma by Bue

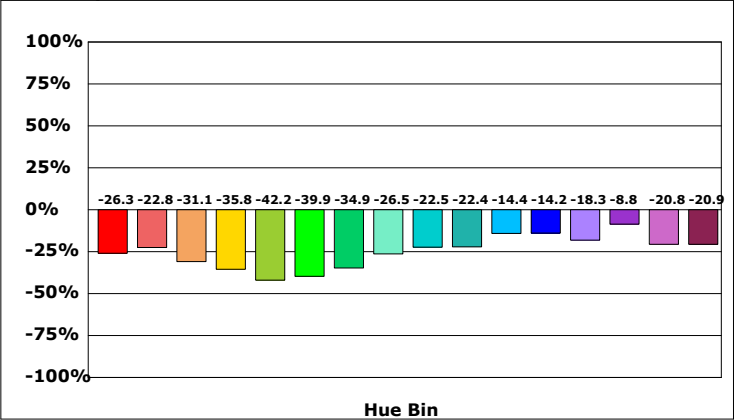

产品型号:P19
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:08/10/12

