



光谱图

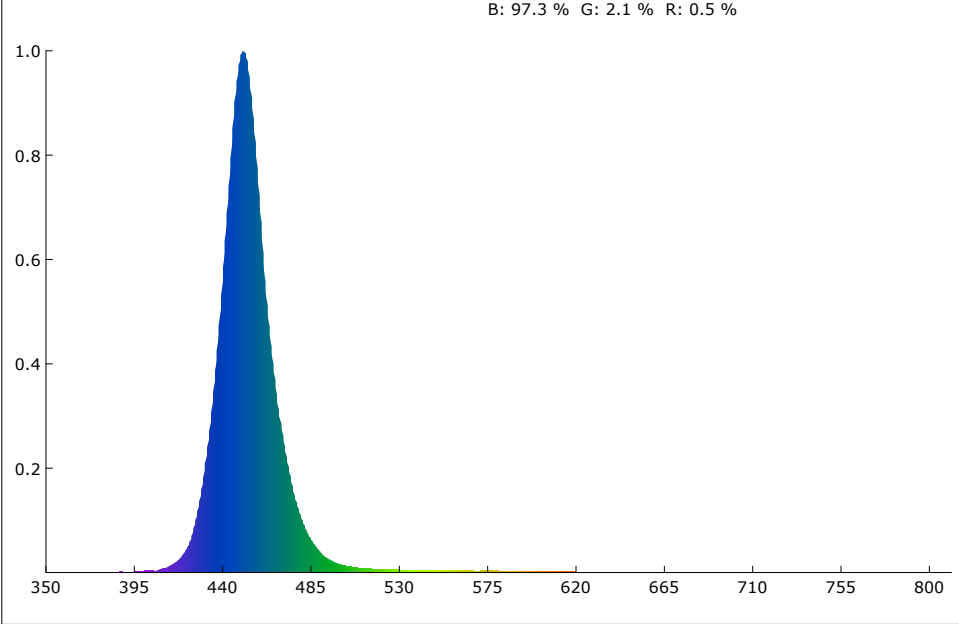

SDCM

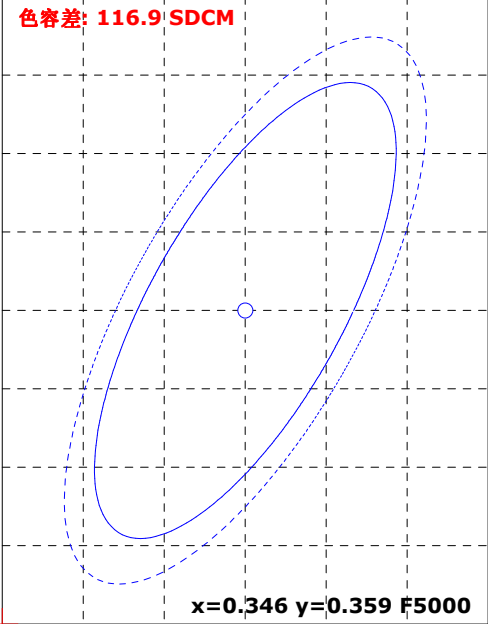

颜色参数:

坐标x: 0.1543 坐标y: 0.0350 坐标u: 0.1984 坐标v: 0.0675 坐标u': 0.1984 坐标v': 0.1013
红色比: 0.5 % 绿色比: 2.1 % 蓝色比: 97.3 % 光通量红色比: 2.3 % 光通量绿色比: 26.8 % 光通量蓝色比: 70.8 %


显色指数: -45.5 AvgR: -45.9
R1: 21.2 R2: -28.6 R3: -99.0 R4: -95.2 R5: 29.0 R6: -34.0 R7: -55.1 R8: -44.6
R9: -99.0 R10: -99.0 R11: -99.0 R12: -92.3 R13: 8.0 R14: -33.2 R15: 32.2

色温: 99999 K 光通量: 243.471 lm 峰值波长: 450.6 nm 色容差: 116.9
明暗视觉比: 17.9 中心波长: 451.4 nm 主波长: 456.9 nm 质心波长: 455.6 nm
半宽度: 24.1 nm 色偏差: 0.15885 色纯度: 96.8 % 色质指数: 0.3
LER(TM-30): 45.7 辐射功率: 5331.1 mw 色域指数(Rg): nan 逼真度(Rf): -nan(ind)
红光辐射功率: 27.6 mw 近红辐射功率: 3.5 mw 远红辐射功率: 0.6 mw


电参数:

光效: 3.5 Lm/W 能效: 3.8 能效等级: G
电压: 222.0 V 电流: 0.503 A 功率: 69.250 W 功率因素: 0.620

Rf: -nan(ind) CCT: 99999K u': 0.1984
Rg: nan LER: 45.7 Duv: 0.15885 v': 0.1013

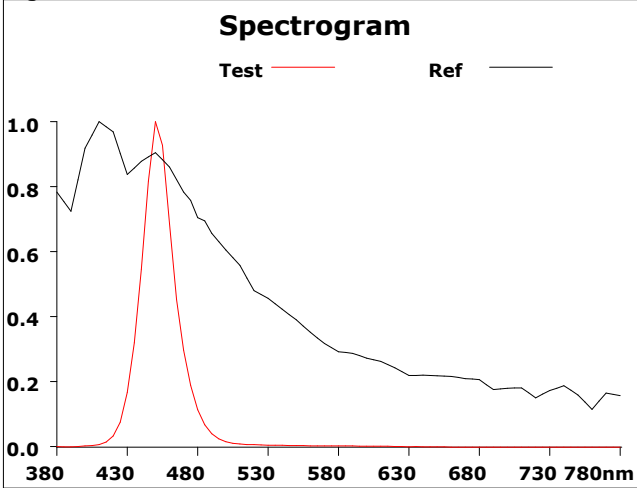

500			
Hue Bin	Rf	Chroma	Hue
1	-nan(ind)	nan%	-nan(ind)%
2	-nan(ind)	nan%	-nan(ind)%
3	-nan(ind)	nan%	-nan(ind)%
4	-nan(ind)	nan%	-nan(ind)%
5	-nan(ind)	nan%	-nan(ind)%
6	-nan(ind)	nan%	-nan(ind)%
7	-nan(ind)	nan%	-nan(ind)%
8	-nan(ind)	nan%	-nan(ind)%
9	-nan(ind)	nan%	-nan(ind)%
10	-nan(ind)	nan%	-nan(ind)%
11	0.0	8.5%	-388.5%
12	0.0	-161.0%	-640.5%
13	0.0	-373.5%	-477.3%
14	0.0	-526.9%	-333.7%
15	0.0	-777.7%	-202.6%
16	0.0	-542.2%	64.1%

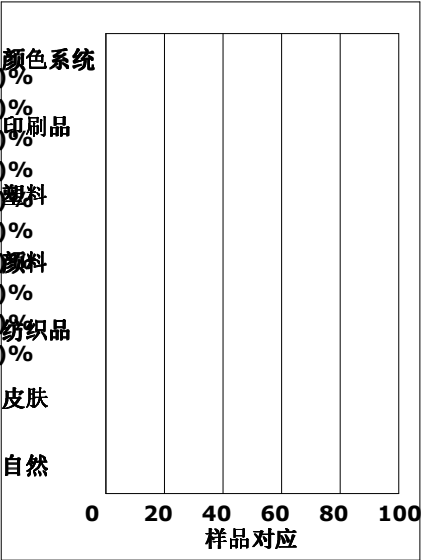

ERROR: rangecheck
OFFENDING COMMAND: roll

STACK:

2
4
-2.14748e+011
-2.14748e+012