

The F2 200W warm white + 200W cool white light sources, supporting 25°-60° electric zoom for flexible switching between spot and flood lighting. With an IP65 protection rating, it is rainproof and dustproof, suitable for both indoor and outdoor use. It supports DMX and RDM control, enabling multi-unit stitching for enhanced effects.

Key features:

- 200W Warm White + 200W Cold White
- 25 ° - 60 ° electrically adjustable, with adjustable focus or flood light
- 2300K-7500K color temperature adjustable
- uniform color
- spliceable
- IP65 waterproof rating
- CRI 95+

Application:

- Music festival
- Mobile performance
- Outdoor stage
- Museum




F2




Photometric

WW(lx)	13800	3020	1270	771	495	371	252	251	217	158
CW(lx)	19500	4770	2090	1130	716	538	398	372	302	233
Full on(lx)	18400	4300	1750	1060	636	475	346	296	266	209

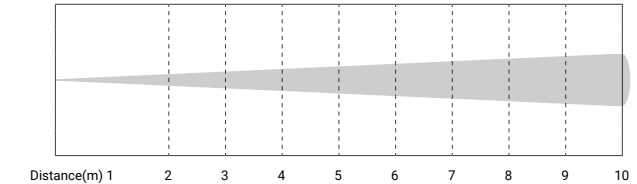

Minimum Spot - 25°

WW(lx)	6130	1590	785	447	308	200	154	185	107	85
CW(lx)	8970	2260	1120	672	432	267	226	126	159	124
Full on(lx)	8460	1980	1020	615	351	260	180	163	140	110

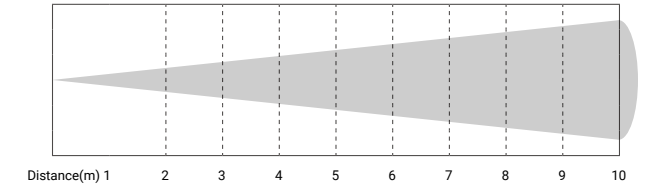

Maximum Spot - 60°

Technical Data

Power supply:	AC100-240V, 50/60Hz
LED:	200W + WW + 200W CW
Color temperature:	2300K - 7500K
Power connection:	Power in & out
Signal connection:	3-pin XLR in & out

Control channels:	12/19/24/29CH
Control mode:	DMX , RDM
Size:	233*151*145mm
Housing:	Colour black
Environment:	IP65

