

CHINLITE 5600

The Chinlite 5600 is a professional-grade chin light that utilizes a high-color-rendering LED light source with a standard color temperature of 5600K. Suitable for film, television, studio, and photography applications, it delivers exceptional color reproduction. Featuring both DMX signal control and manual control for easy operation.

Key features:

- Color temperature 5600K
- Adopting high visibility LED light source, with high light efficiency and good color
- Adopting DMX signal control/manual control, easy to operate
- Brightness range 0-100% smooth adjustment
- Honeycomb panel perfectly controls light
- High color rendering, Ra 97, R9 $\geq$ 91, TLCI 99
- One controller can control 4 desk lamps

Application:


- Studio
- Concert
- Exhibition



Accessories:



Honeycomb

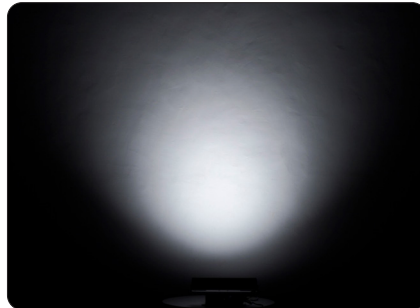

Technical Data

Power supply:	AC110-240V, 50/60Hz	Housing:	Colour black
Color temperature:	5600K	Size (lamp body) :	350 x 45 x 65 mm
Power connection:	PowerCON in & out	Size (controller):	175 x 145 x 40 mm
Signal connection:	3+5 pin XLR in & out	N.W.:	0.6kg x 4 (lamp body), 0.65kg controller
Control channels:	1/4	Accessories:	Power cable, Honeycomb
Control mode:	DMX and RDM	Environment:	IP20