



光谱图

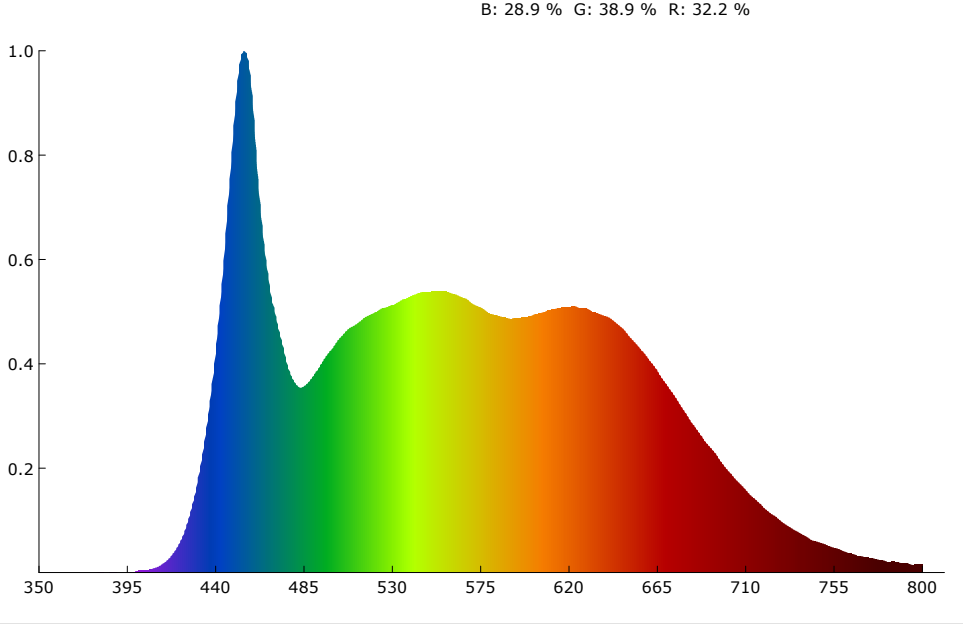

SDCM

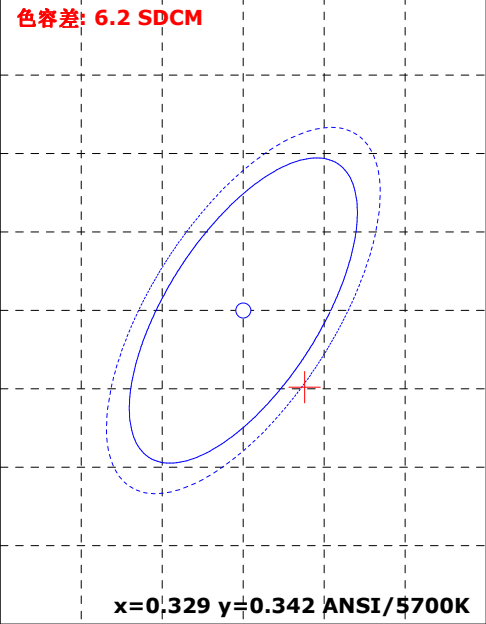

颜色参数:

坐标x: 0.3325 坐标y: 0.3368 坐标u: 0.2086 坐标v: 0.3169 坐标u': 0.2086 坐标v': 0.4754
红色比: 32.2 % 绿色比: 38.9 % 蓝色比: 28.9 % 光通量红色比: 16.6 % 光通量绿色比: 79.1 % 光通量蓝色比: 4.3 %

显色指数: 96.7 AvgR: 95.4
R1: 97.1 R2: 98.0 R3: 94.9 R4: 97.9 R5: 96.8 R6: 94.1 R7: 97.5 R8: 97.7
R9: 97.4 R10: 94.8 R11: 96.9 R12: 75.2 R13: 98.5 R14: 96.7 R15: 97.2


色温: 5494 K 光通量: 5506.951 lm 峰值波长: 454.5 nm 色容差: 6.2
明暗视觉比: 2.2 中心波长: 456.6 nm 主波长: 541.3 nm 质心波长: 563.8 nm
半宽度: 28.0 nm 色偏差: -0.00227 色纯度: 0.8 % 色质指数: 89.2
LER(TM-30): 268.4 辐射功率: 20515.4 mw 色域指数(Rg): 100.3 逼真度(Rf): 91.0
红光辐射功率: 6259.2 mw 近红辐射功率: 1015.5 mw 远红辐射功率: 60.3 mw

电参数:





光效: 32.5 Lm/W 能效: 35.4 能效等级: G
电压: 221.9 V 电流: 0.781 A 功率: 169.400 W 功率因素: 0.976

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/12/23
备注:


Rf: 91.0 CCT: 5494K u': 0.2086
Rg: 100.3 LER: 268.4 Duv: -0.00227 v': 0.4754

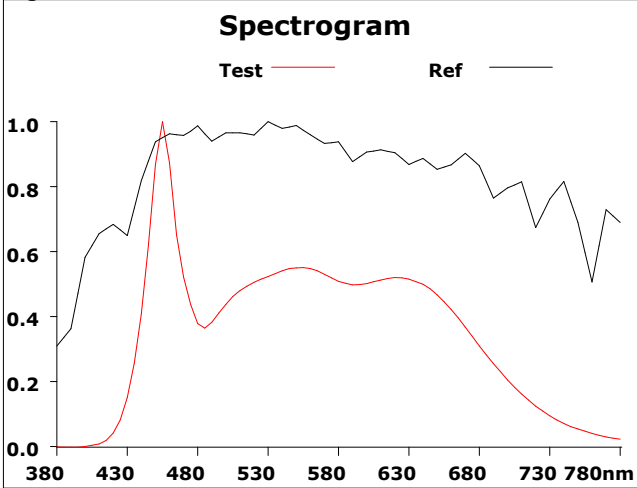


500			
Hue Bin	Rf	Chroma	Hue
1	92.8	-1.3%	0.9%
2	95.1	-0.5%	1.6%
3	93.3	-0.3%	1.7%
4	92.1	-1.5%	0.8%
5	90.7	-3.2%	0.5%
6	96.1	-0.5%	0.1%
7	94.1	-2.8%	1.3%
8	90.4	-2.6%	4.3%
9	88.0	-2.6%	9.4%
10	83.3	-0.3%	9.4%
11	82.6	3.5%	9.2%
12	93.8	2.6%	2.7%
13	93.7	4.4%	0.4%
14	94.2	1.9%	-0.8%
15	84.6	8.6%	-7.7%
16	96.3	-0.7%	0.0%

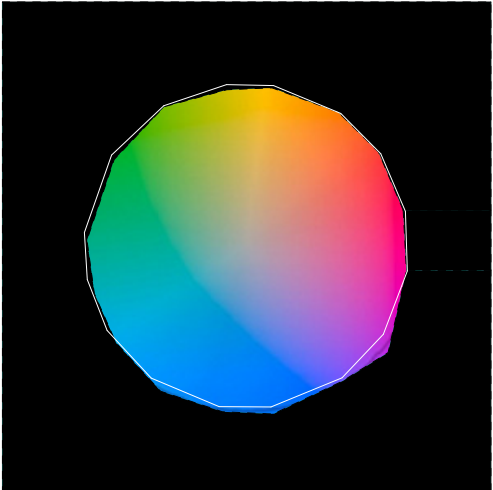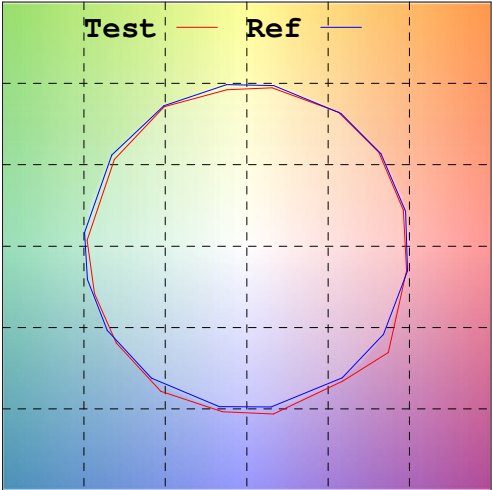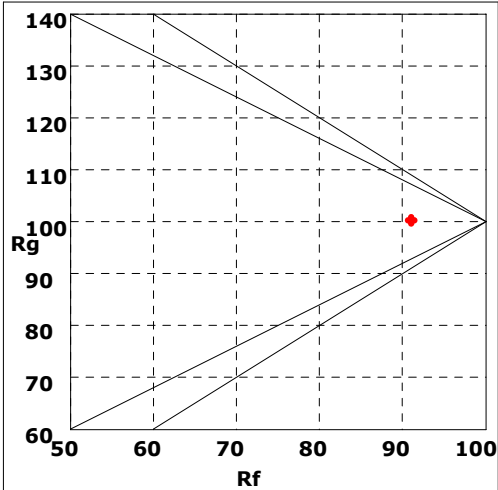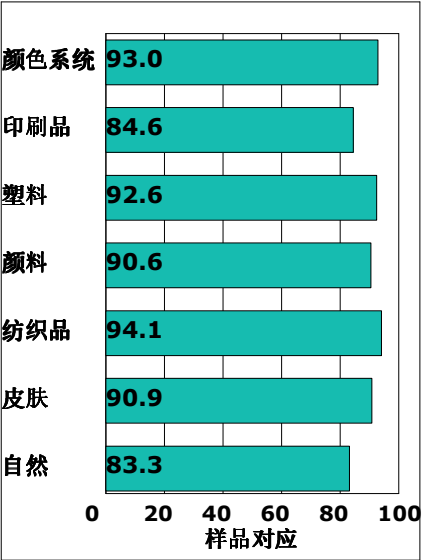




Rf by Bue

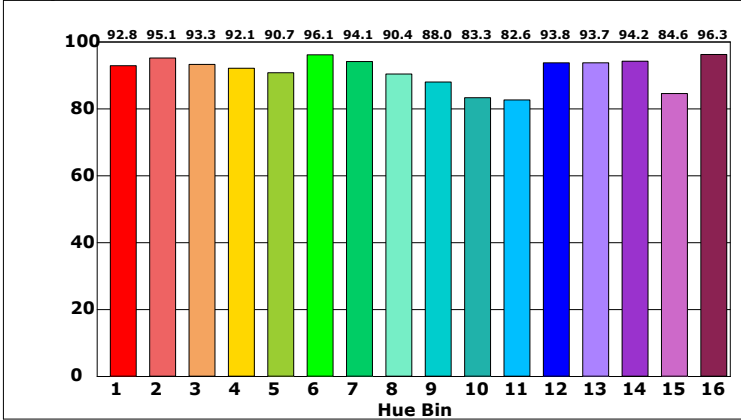

Chroma by Bue

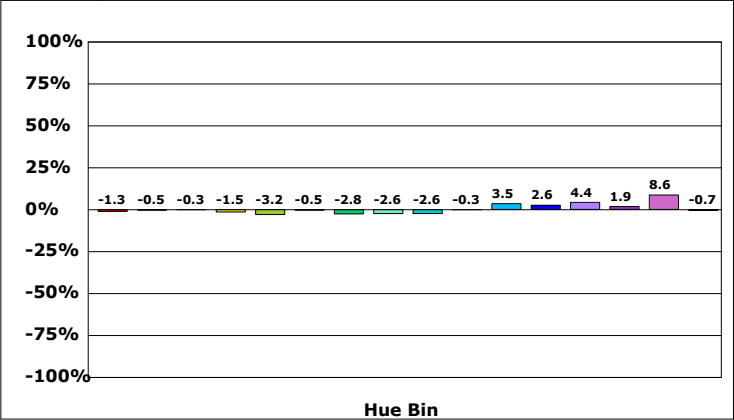

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/12/23
备注:

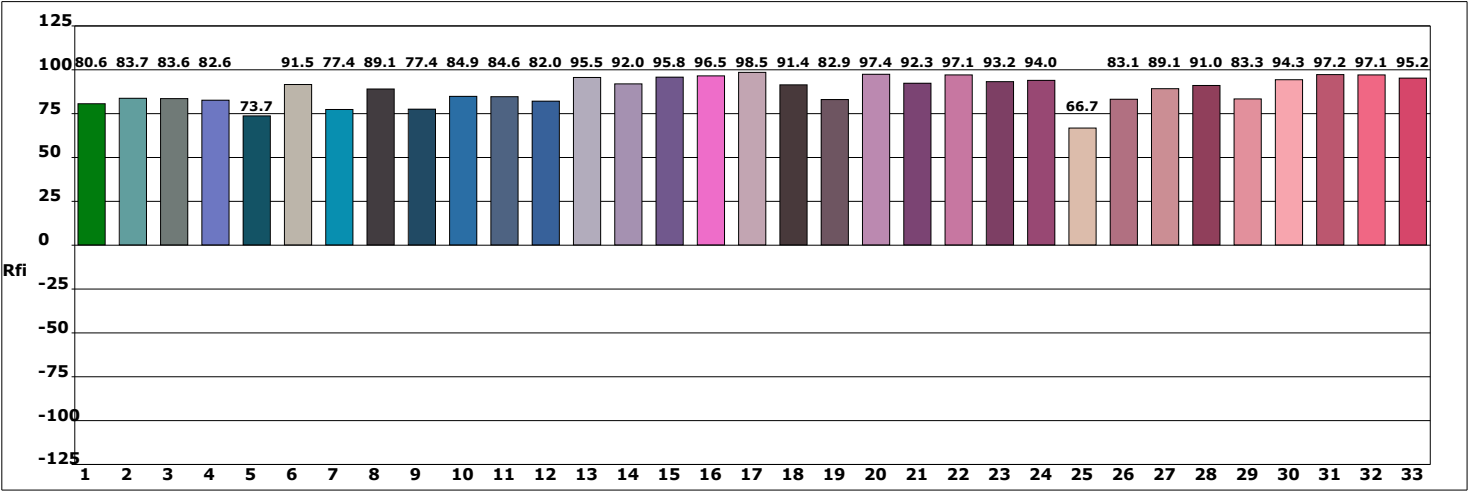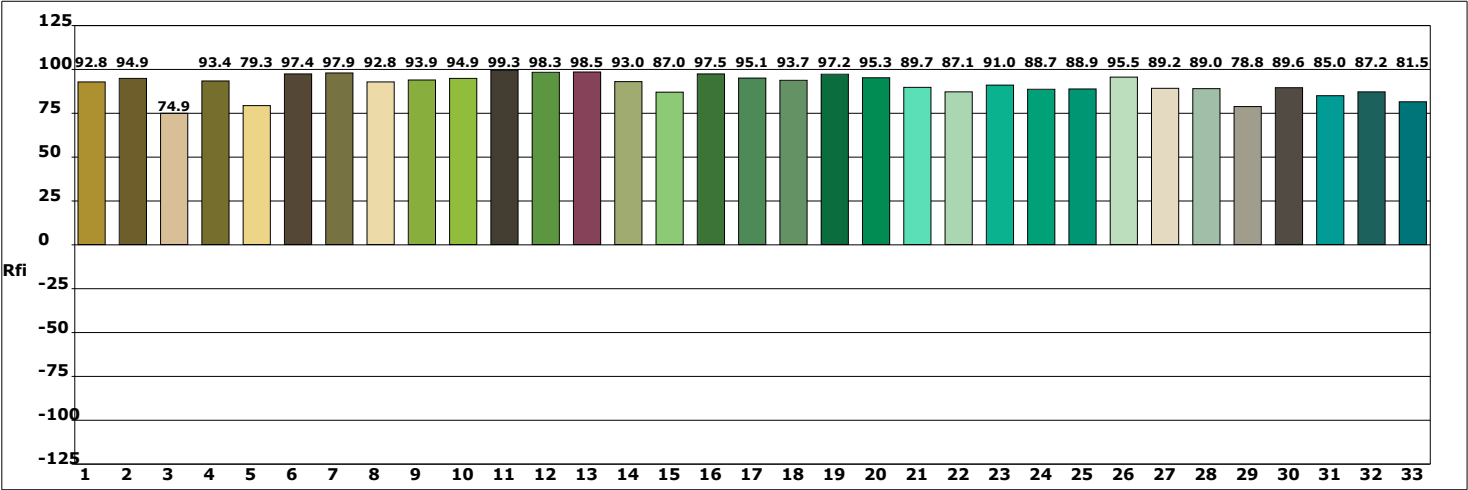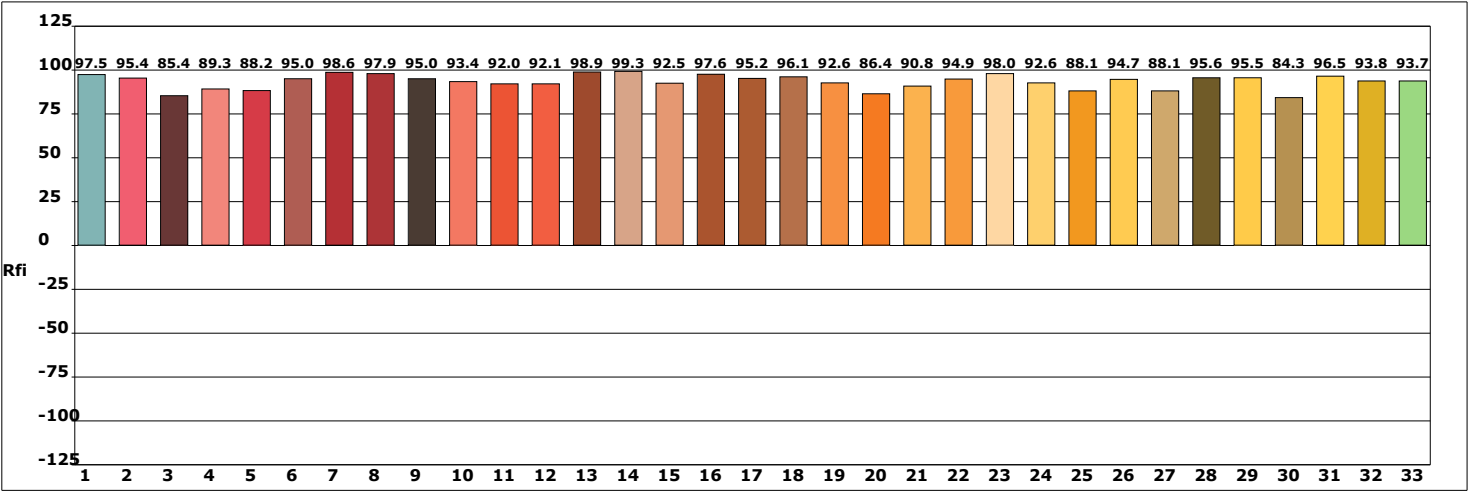

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/12/23