



光谱图

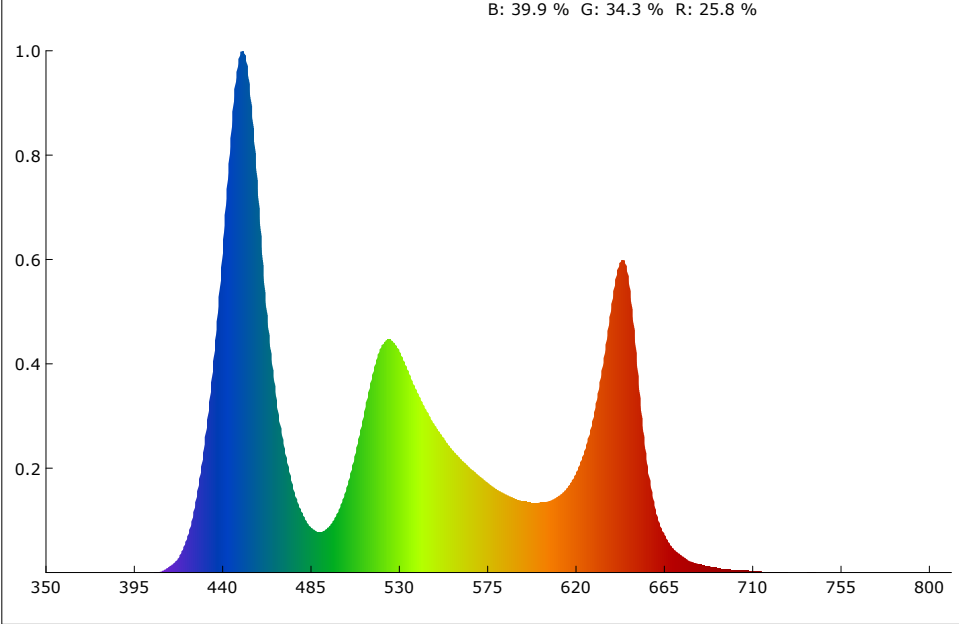

SDCM

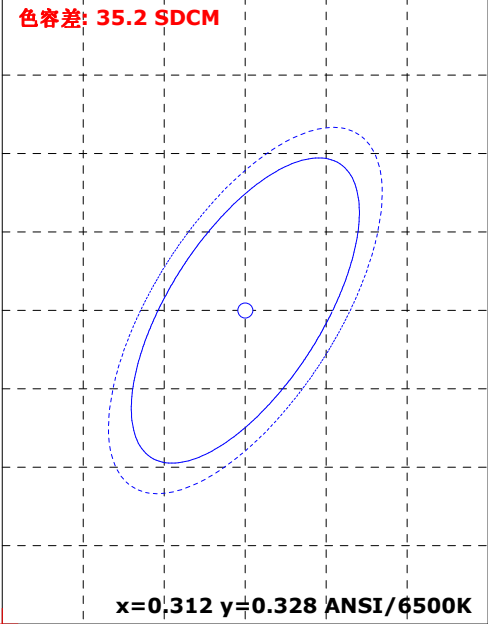

颜色参数:

坐标x: 0.2712      坐标y: 0.2624      坐标u: 0.1935      坐标v: 0.2808      坐标u': 0.1935      坐标v': 0.4212  
红色比: 25.8 %      绿色比: 34.3 %      蓝色比: 39.9 %      光通量红色比: 15.4 %      光通量绿色比: 79.3 %      光通量蓝色比: 5.3 %

显色指数: 73.2      AvgR: 62.6  
R1: 78.6      R2: 92.2      R3: 55.7      R4: 67.8      R5: 87.9      R6: 85.7      R7: 73.7      R8: 44.1  
R9: -59.0      R10: 74.2      R11: 62.2      R12: 56.8      R13: 85.6      R14: 73.4      R15: 60.8


色温: 14206 K      光通量: 578.368 lm      峰值波长: 450.6 nm      色容差: 35.2  
明暗视觉比: 2.8      中心波长: 450.6 nm      主波长: 474.2 nm      质心波长: 531.8 nm  
半宽度: 24.1 nm      色偏差: -0.00787      色纯度: 28.1 %      色质指数: 86.9  
LER(TM-30): 245.6      辐射功率: 2354.8 mw      色域指数(Rg): 112.9      逼真度(Rf): 72.7  
红光辐射功率: 605.9 mw      近红辐射功率: 2.9 mw      远红辐射功率: 0.0 mw

电参数:

光效: 6.7 Lm/W      能效: 7.3      能效等级: G  
电压: 219.9 V      电流: 0.611 A      功率: 85.890 W      功率因素: 0.638

产品型号:      制造厂商:Guangzhou Hotion Technology Co., Ltd  
产品编号:      测试单位:  
测试人员:      测试日期:03/17/14  
备注:

Rf: 72.7 CCT: 14206K u': 0.1935  
Rg: 112.9 LER: 245.6 Duv: -0.00787 v': 0.4212

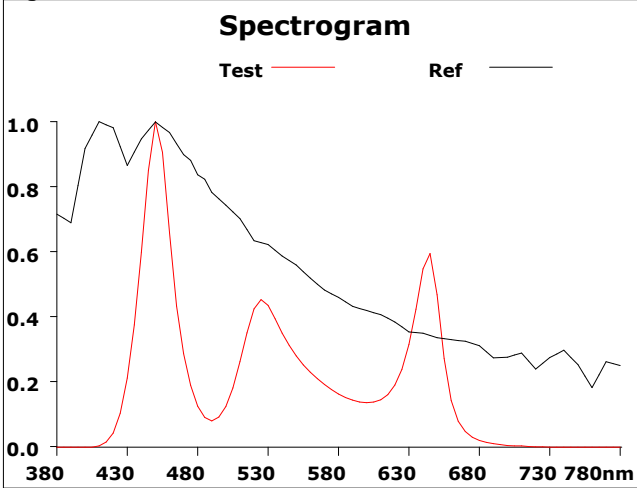

| 500     |      |        |       |
|---------|------|--------|-------|
| Hue Bin | Rf   | Chroma | Hue   |
| 1       | 61.6 | 19.8%  | -0.0% |
| 2       | 83.3 | 6.3%   | -4.6% |
| 3       | 84.0 | 4.5%   | -3.4% |
| 4       | 78.2 | 3.3%   | 6.3%  |
| 5       | 77.7 | 2.2%   | 6.4%  |
| 6       | 78.8 | 8.9%   | 6.7%  |
| 7       | 76.7 | -5.3%  | -0.1% |
| 8       | 88.3 | 0.8%   | 2.4%  |
| 9       | 81.3 | -5.1%  | 8.7%  |
| 10      | 71.8 | -6.6%  | 21.1% |
| 11      | 45.8 | -1.7%  | 24.9% |
| 12      | 61.4 | -2.9%  | 29.6% |
| 13      | 52.1 | 6.7%   | 31.9% |
| 14      | 56.0 | 11.7%  | 25.0% |
| 15      | 53.2 | 32.4%  | 23.5% |
| 16      | 70.5 | 13.3%  | 3.3%  |

