



光谱图

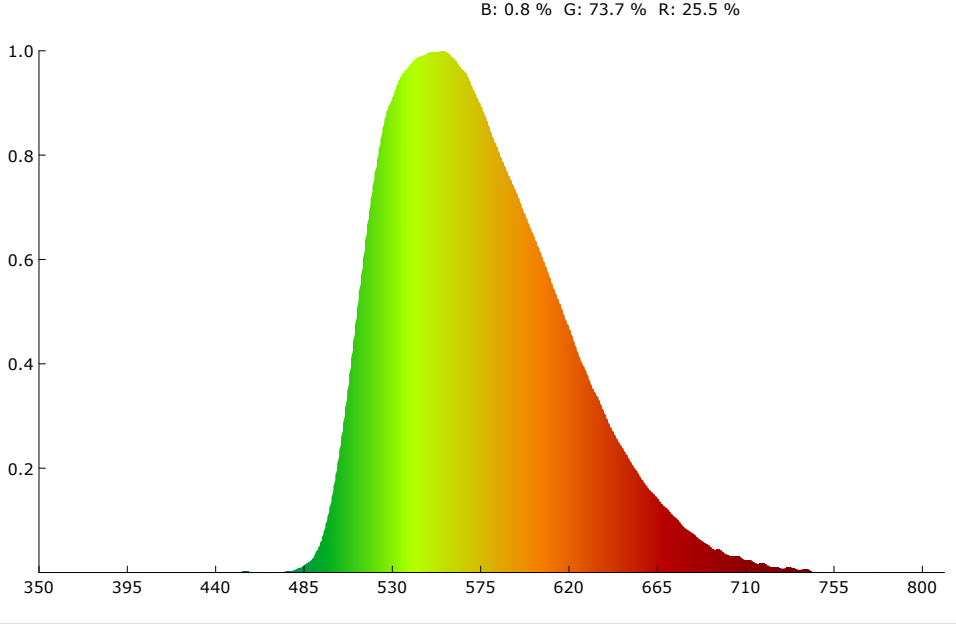

SDCM

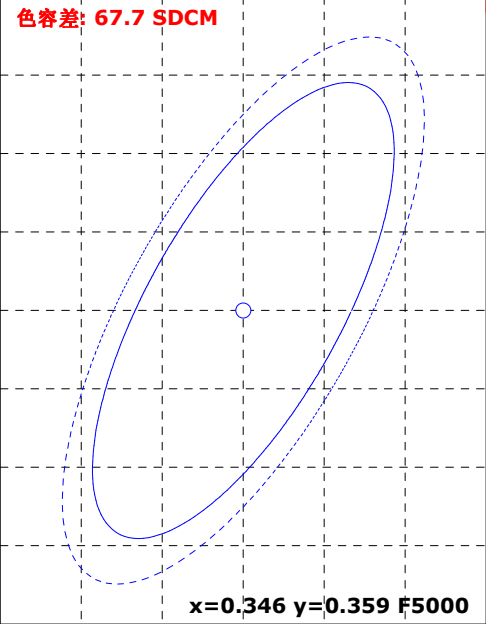

颜色参数:

坐标x: 0.4263 坐标y: 0.5550 坐标u: 0.1936 坐标v: 0.3781 坐标u': 0.1936 坐标v': 0.5671
红色比: 25.5 % 绿色比: 73.7 % 蓝色比: 0.8 % 光通量红色比: 10.8 % 光通量绿色比: 89.2 % 光通量蓝色比: 0.0 %

显色指数: 25.5 AvgR: 11.4
R1: 38.5 R2: 38.4 R3: 23.2 R4: -5.2 R5: 36.2 R6: 33.8 R7: 27.5 R8: 12.1
R9: -99.0 R10: -24.4 R11: -31.8 R12: 2.2 R13: 36.1 R14: 61.3 R15: 21.6


色温: 4040 K 光通量: 337.386 lm 峰值波长: 556.5 nm 色容差: 67.7
明暗视觉比: 1.2 中心波长: 564.6 nm 主波长: 568.2 nm 质心波长: 573.6 nm
半宽度: 104.2 nm 色偏差: 0.05387 色纯度: 94.8 % 色质指数: 9.1
LER(TM-30): 487.3 辐射功率: 692.4 mw 色域指数(Rg): 19.9 逼真度(Rf): 13.7
红光辐射功率: 175.3 mw 近红辐射功率: 4.7 mw 远红辐射功率: 0.0 mw

电参数:


光效: 8.6 Lm/W 能效: 9.3 能效等级: G
电压: 220.1 V 电流: 0.302 A 功率: 39.310 W 功率因素: 0.590

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:


Rf: 13.7 CCT: 4040K u': 0.1936
Rg: 19.9 LER: 487.3 Duv: 0.05387 v': 0.5671

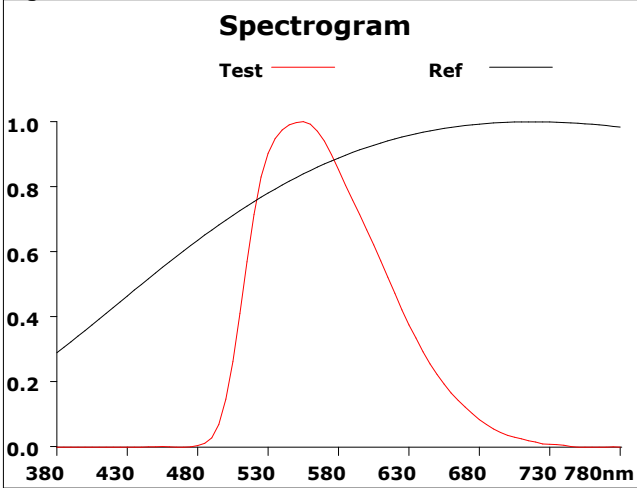

500			
Hue Bin	Rf	Chroma	Hue
1	40.5	-28.2%	1.5%
2	34.4	-27.2%	-19.1%
3	2.5	-47.5%	-28.6%
4	1.5	-66.3%	-20.3%
5	0.9	-84.0%	4.7%
6	0.2	-79.8%	39.3%
7	0.4	-61.0%	54.9%
8	10.0	-35.4%	39.6%
9	41.4	-22.9%	32.3%
10	45.3	-24.5%	17.4%
11	42.8	-32.3%	-7.3%
12	7.7	-48.5%	-11.4%
13	12.5	-63.9%	-1.2%
14	21.6	-52.7%	18.4%
15	14.1	-51.4%	25.9%
16	33.3	-32.7%	19.4%

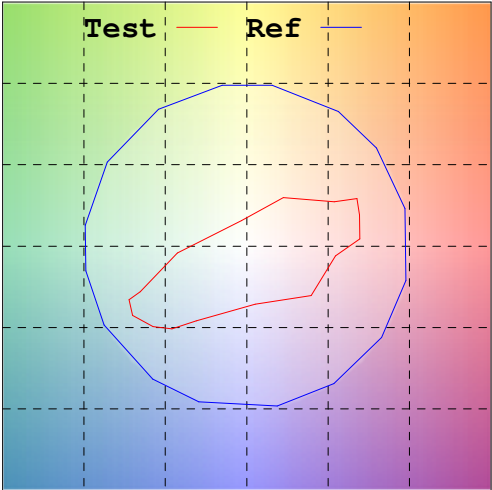

Rf by Bue

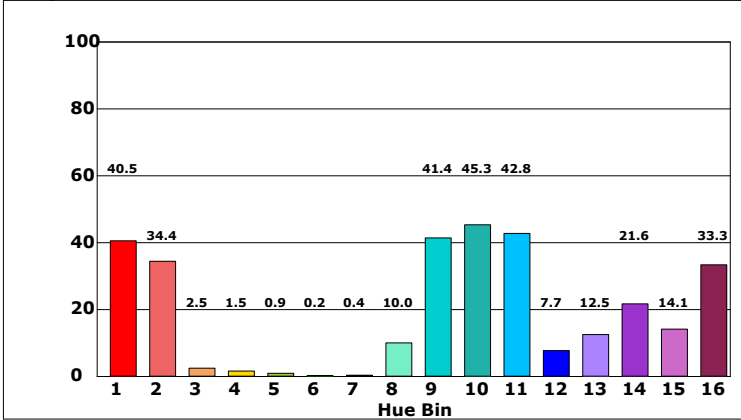

Chroma by Bue

