



光谱图

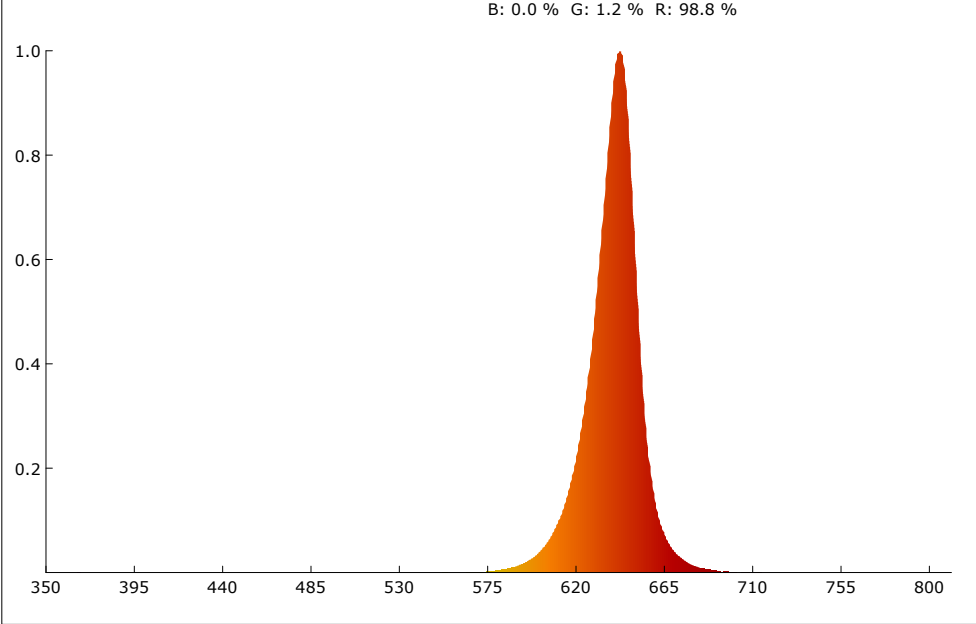

SDCM

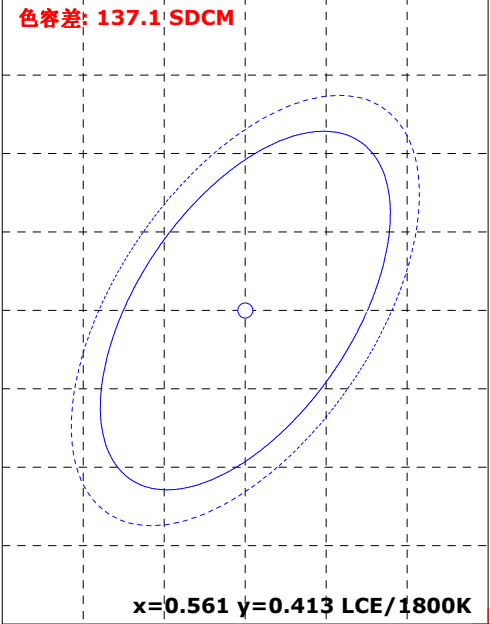

颜色参数:

坐标x: 0.7036 坐标y: 0.2962 坐标u: 0.5468 坐标v: 0.3453 坐标u': 0.5468 坐标v': 0.5179
红色比: 98.8 % 绿色比: 1.2 % 蓝色比: 0.0 % 光通量红色比: 95.1 % 光通量绿色比: 4.9 % 光通量蓝色比: 0.0 %

显色指数: 24.3 AvgR: 21.0
R1: 7.9 R2: 73.2 R3: 46.6 R4: -10.0 R5: 15.5 R6: 87.3 R7: 18.9 R8: -44.5
R9: -99.0 R10: 66.9 R11: -1.9 R12: 80.7 R13: 26.9 R14: 67.7 R15: -21.1


色温: 1000 K 光通量: 124.809 lm 峰值波长: 642.9 nm 色容差: 137.1
明暗视觉比: 0.0 中心波长: 641.1 nm 主波长: 627.0 nm 质心波长: 639.2 nm
半宽度: 21.8 nm 色偏差: 0.15494 色纯度: 100.0 % 色质指数: -nan(ind)
LER(TM-30): 137.2 辐射功率: 909.5 mw 色域指数(Rg): 6.0 逼真度(Rf): 26.4
红光辐射功率: 897.9 mw 近红辐射功率: 0.6 mw 远红辐射功率: 0.1 mw

电参数:





光效: 2.7 Lm/W 能效: 2.9 能效等级: G
电压: 220.3 V 电流: 0.351 A 功率: 46.610 W 功率因素: 0.601

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:


Rf: 26.4 CCT: 1000K u': 0.5468
Rg: 6.0 LER: 137.2 Du: 15494 v': 0.5179

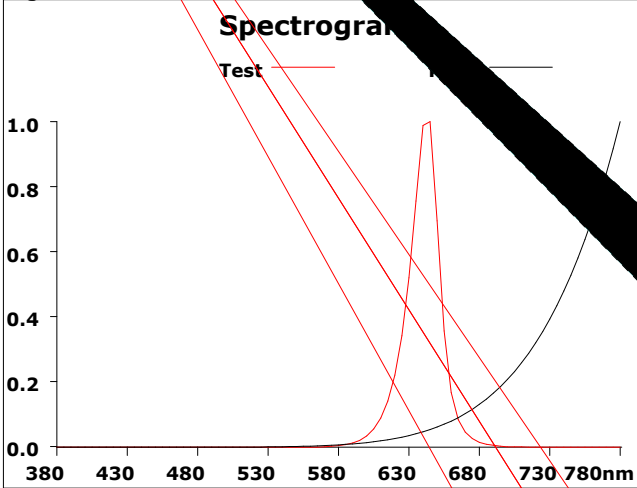


500			
Hue Bin	Rf	Chroma	Hue
1	21.2	-54.6%	-4.0%
2	53.9	-69.6%	-18.5%
3	68.6	-91.1%	2.6%
4	100.0	nan%	-nan(ind)%
5	77.5	-75.6%	35.3%
6	100.0	nan%	-nan(ind)%
7	57.1	-5.4%	38.8%
8	21.8	-42.3%	-4.3%
9	3.1	-57.4%	-8.3%
10	3.1	-92.0%	2.3%
11	42.6	-91.8%	9.2%
12	20.0	-91.6%	-121.1%
13		-116.1%	-49.0%
14		-68.8%	27.3%
15	75.2	2.1%	18.6%
16	33.0		-7.7%

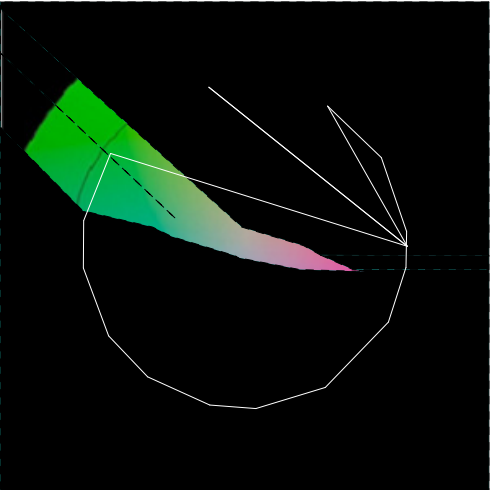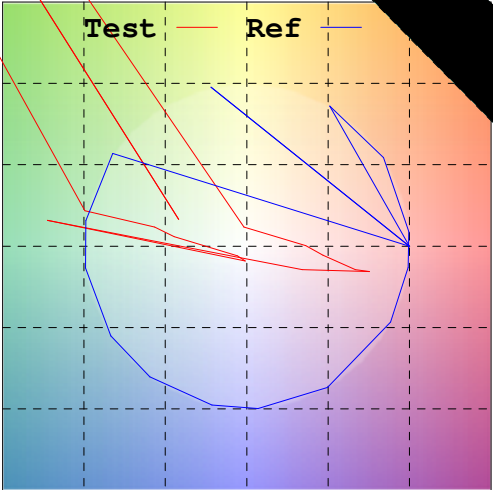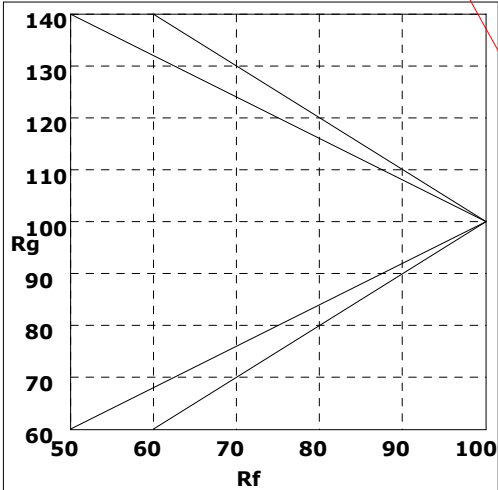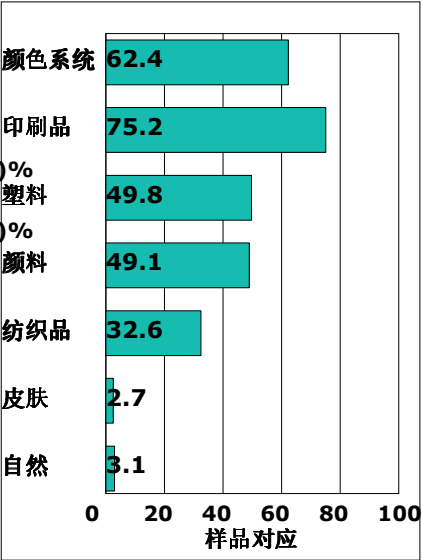

Rf by Bue

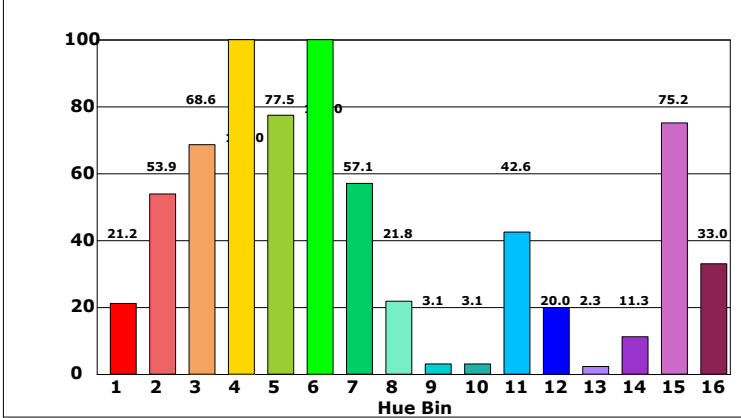

Chroma by Bue

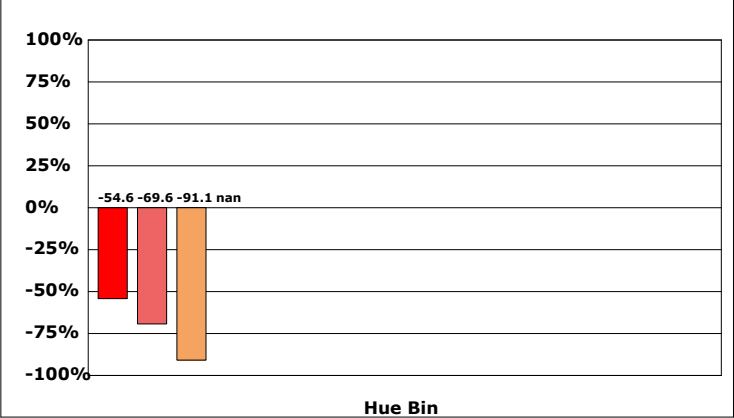

ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173