


光谱图

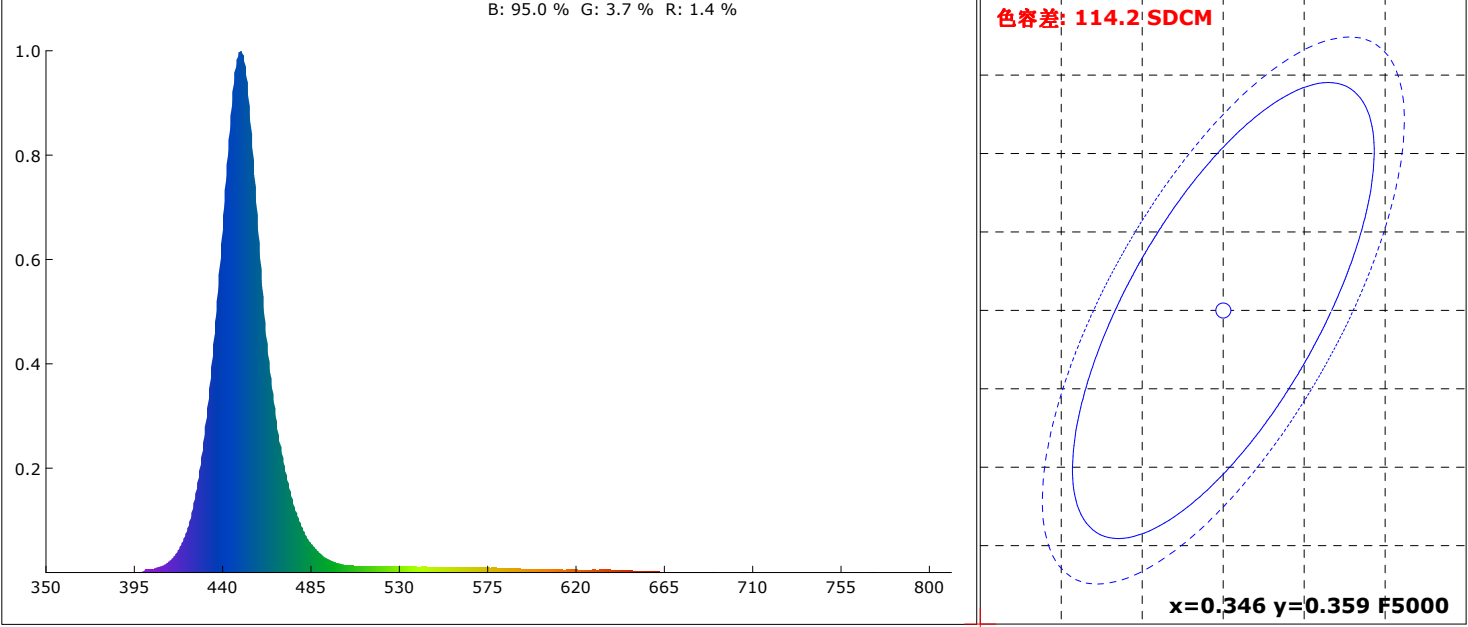

颜色参数:

坐标x: 0.1604

坐标y: 0.0409

坐标u: 0.2024

坐标v: 0.0774

坐标u': 0.2024

坐标v': 0.1161

红色比: 1.4 %

绿色比: 3.7 %

蓝色比: 95.0 %

光通量红色比: 4.8 %

光通量绿色比: 40.3 %

光通量蓝色比: 55.0 %

显色指数: -33.2

AvgR: -33.6

R1: 57.3

R2: -25.7

R3: -99.0

R4: -85.3

R5: 56.2

R6: -20.0

R7: -52.5

R8: -36.6

R9: -87.9

R10: -99.0

R11: -98.2

R12: -74.9

R13: 33.3

R14: -31.4

R15: 59.4

色温: 99999 K

光通量: 80.573 lm

峰值波长: 449.6 nm

色容差: 114.2

明暗视觉比: 14.6

中心波长: 449.6 nm

主波长: 455.7 nm

质心波长: 456.8 nm

半宽度: 24.1 nm

色偏差: 0.05387

色纯度: 94.4 %

色质指数: 0.2

LER(TM-30): 53.0

辐射功率: 1520.7 mw

色域指数(Rg): nan

逼真度(Rf): -nan(ind)

红光辐射功率: 20.7 mw

近红辐射功率: 0.4 mw

远红辐射功率: 0.1 mw

电参数:

光效: 1.6 Lm/W

能效: 1.8

能效等级: G


电压: 220.1 V

电流: 0.369 A

功率: 49.230 W

功率因素: 0.605

Rf: -nan(ind) CCT: 99999K u': 0.2024
Rg: nan LER: 53.0 Duv: 0.05387 v': 0.1161

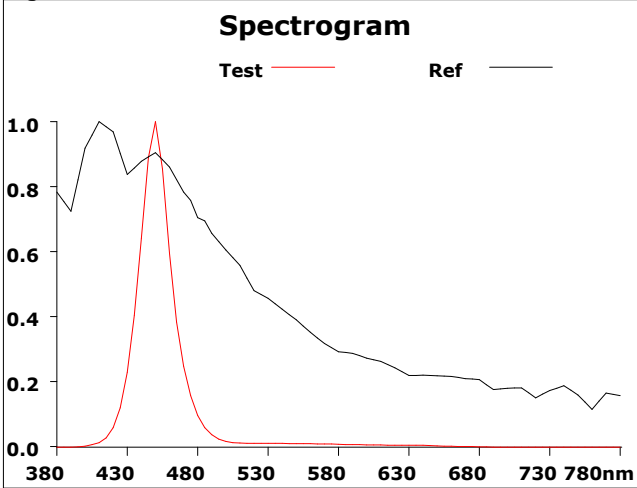

500			
Hue Bin	Rf	Chroma	Hue
1	-nan(ind)	nan%	-nan(ind)%
2	0.0	-106.8%	114.8%
3	0.0	-184.0%	382.5%
4	-nan(ind)	nan(ind)	nan%
5	0.0	118.6%	348.9%
6	0.0	264.1%	271.5%
7	0.0	288.6%	107.3%
8	0.0	344.1%	-33.6%
9	0.0	199.1%	-132.5%
10	-nan(ind)	nan%	-nan(ind)%
11	-nan(ind)	nan%	-nan(ind)%
12	-nan(ind)	nan%	-nan(ind)%
13	-nan(ind)	nan%	-nan(ind)%
14	-nan(ind)	nan%	-nan(ind)%
15	-nan(ind)	nan%	-nan(ind)%
16	-nan(ind)	nan%	-nan(ind)%

颜色系统

印刷品

塑料

颜料

纺织品

皮肤

自然

0

20

40

60

80

100

样品对应

ERROR: rangecheck
OFFENDING COMMAND: roll

STACK:

2
4
-2.14748e+011
-2.14748e+012