


光谱图

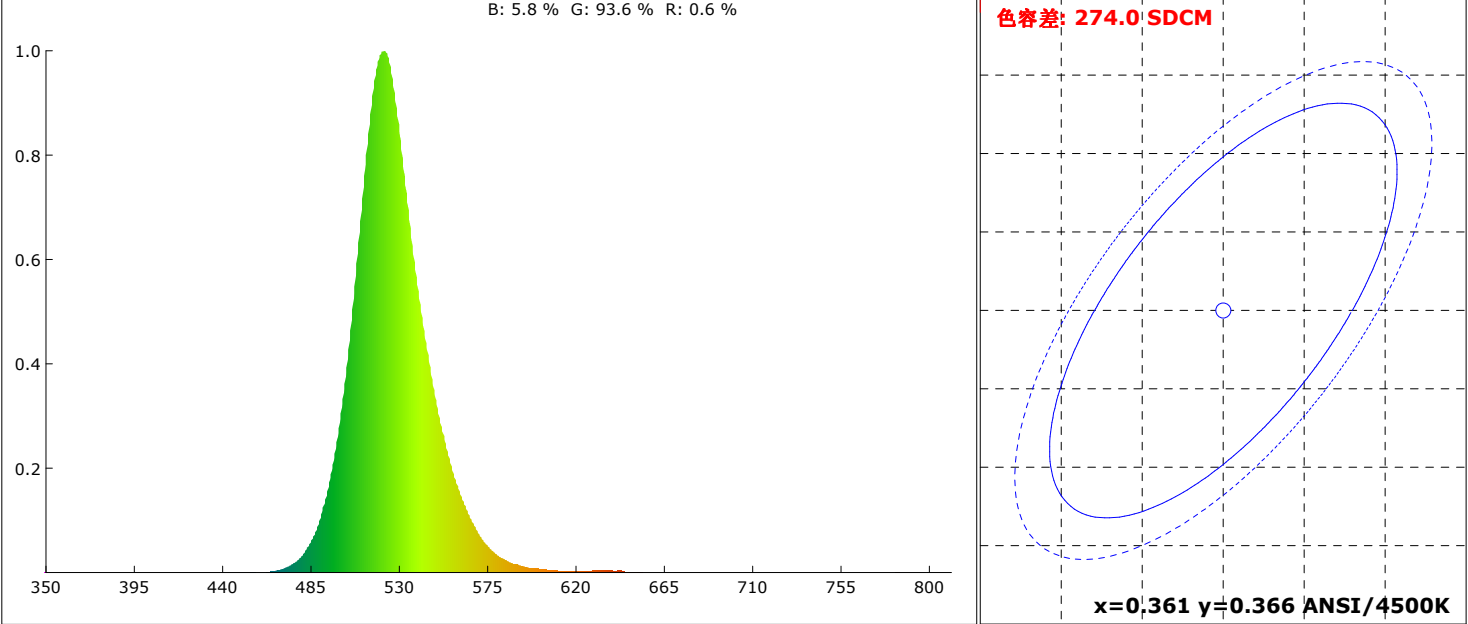

颜色参数:

坐标x: 0.1801 坐标y: 0.7274 坐标u: 0.0634 坐标v: 0.3839 坐标u': 0.0634 坐标v': 0.5759
红色比: 0.6 % 绿色比: 93.6 % 蓝色比: 5.8 % 光通量红色比: 0.3 % 光通量绿色比: 99.3 % 光通量蓝色比: 0.4 %

显色指数: -25.1 AvgR: -37.7
R1: -35.4 R2: -9.5 R3: -23.0 R4: -69.1 R5: -10.8 R6: -13.5 R7: -7.1 R8: -33.1
R9: -99.0 R10: -99.0 R11: -99.0 R12: -29.7 R13: -41.1 R14: 38.6 R15: -34.2


色温: 7678 K 光通量: 348.454 lm 峰值波长: 522.6 nm 色容差: 274.0
明暗视觉比: 2.7 中心波长: 524.1 nm 主波长: 529.2 nm 质心波长: 527.2 nm
半宽度: 34.9 nm 色偏差: 0.15494 色纯度: 82.7 % 色质指数: 0.3
LER(TM-30): 503.1 辐射功率: 692.6 mw 色域指数(Rg): 7.3 逼真度(Rf): 0.7
红光辐射功率: 3.9 mw 近红辐射功率: 0.0 mw 远红辐射功率: 0.0 mw

电参数:





光效: 6.6 Lm/W 能效: 7.2 能效等级: G
电压: 220.2 V 电流: 0.391 A 功率: 52.580 W 功率因素: 0.610

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:

Rf: 0.7 CCT: 7678K u': 0.0634
Rg: 7.3 LER: 503.1 Duv: 0.15494 v': 0.5759

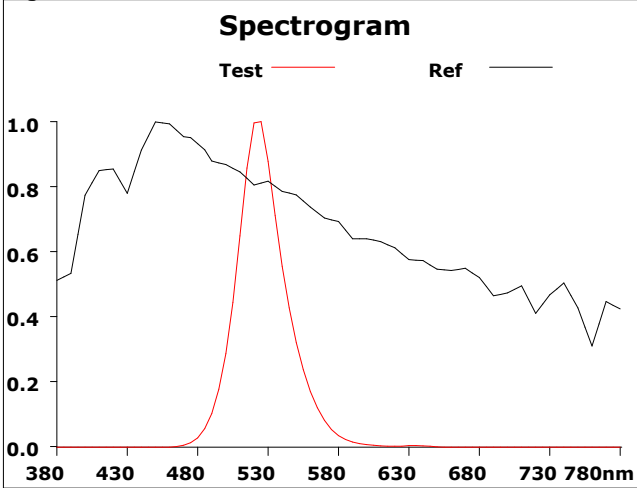

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-84.1%	2.2%
2	0.0	-71.5%	5.4%
3	0.2	-76.1%	-3.4%
4	2.5	-61.0%	-7.6%
5	0.8	-75.3%	-0.8%
6	0.3	-84.1%	3.5%
7	0.2	-78.2%	14.1%
8	0.0	-79.5%	15.4%
9	6.6	-65.5%	34.3%
10	13.1	-49.5%	21.6%
11	2.7	-48.3%	3.7%
12	32.6	-41.5%	-20.2%
13	18.0	-57.9%	-24.0%
14	0.1	-69.2%	-36.7%
15	3.0	-80.4%	-43.7%
16	0.0	-81.8%	-13.9%

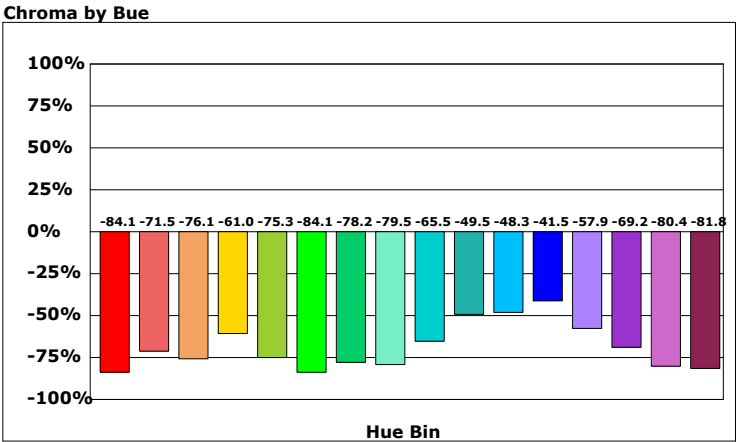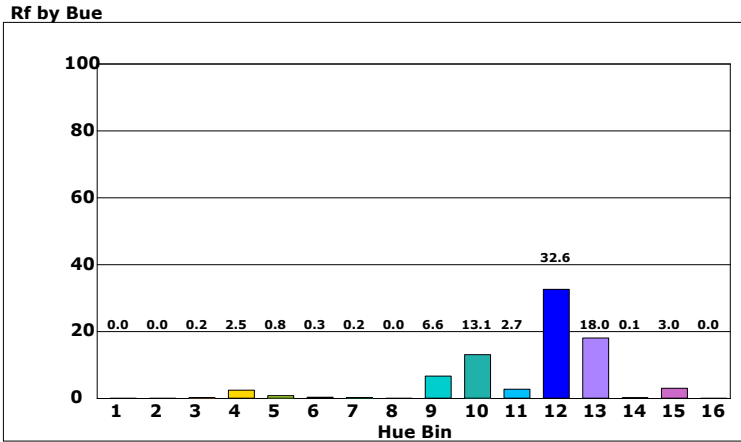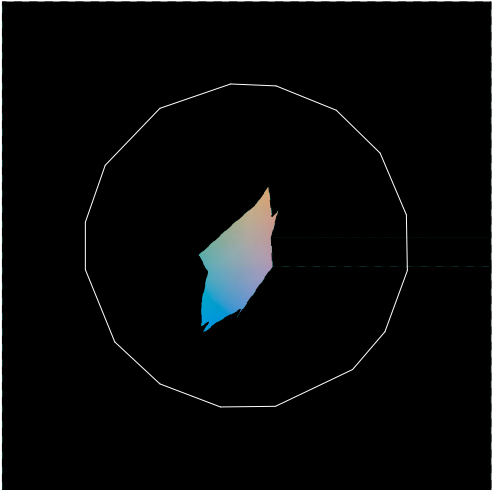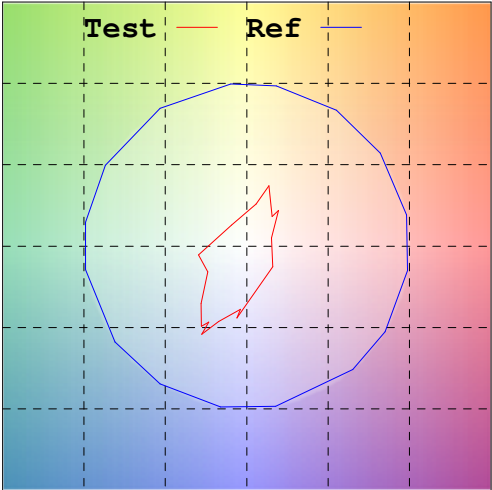

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:03/17/14

