



光谱图

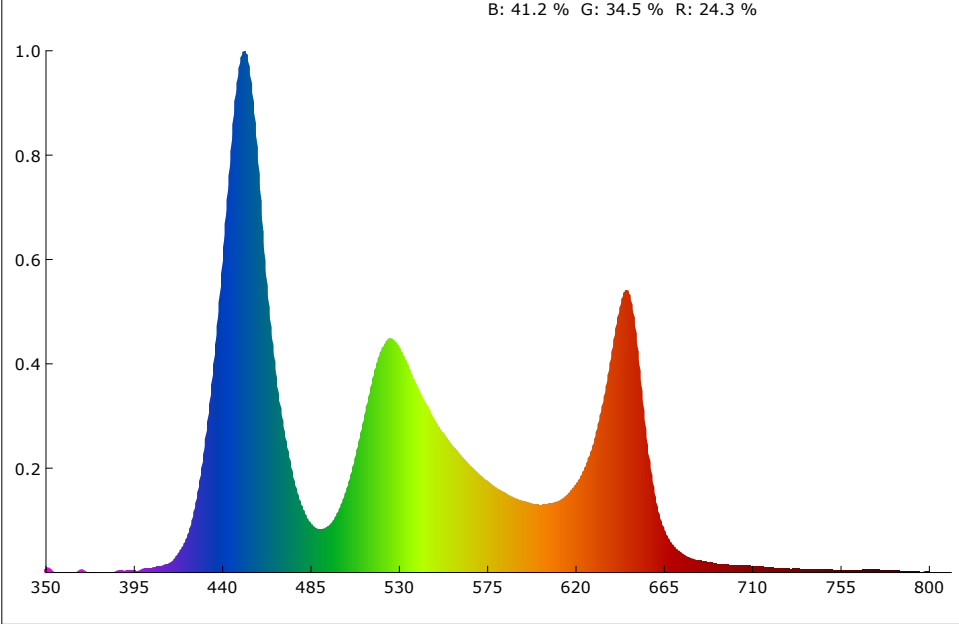

SDCM

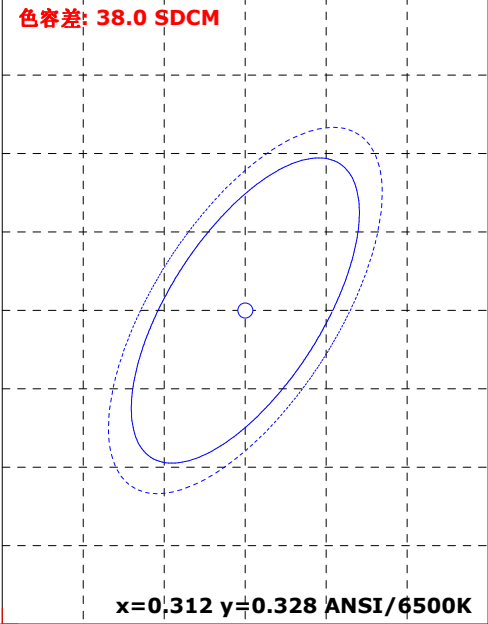

颜色参数:

坐标x: 0.2642 坐标y: 0.2608 坐标u: 0.1887 坐标v: 0.2794 坐标u': 0.1887 坐标v': 0.4191
红色比: 24.3 % 绿色比: 34.5 % 蓝色比: 41.2 % 光通量红色比: 14.0 % 光通量绿色比: 80.4 % 光通量蓝色比: 5.6 %

显色指数: 77.9 AvgR: 68.4
R1: 87.2 R2: 90.2 R3: 58.4 R4: 76.3 R5: 94.9 R6: 82.8 R7: 78.0 R8: 55.7
R9: -28.5 R10: 68.0 R11: 71.2 R12: 52.1 R13: 92.9 R14: 75.3 R15: 70.9


色温: 16303 K 光通量: 1141.173 lm 峰值波长: 451.6 nm 色容差: 38.0
明暗视觉比: 2.8 中心波长: 451.4 nm 主波长: 476.1 nm 质心波长: 531.3 nm
半宽度: 25.9 nm 色偏差: -0.00385 色纯度: 30.4 % 色质指数: 86.1
LER(TM-30): 242.1 辐射功率: 4714.1 mw 色域指数(Rg): 109.3 逼真度(Rf): 74.5
红光辐射功率: 1131.1 mw 近红辐射功率: 41.6 mw 远红辐射功率: 4.9 mw

电参数:





光效: 9.2 Lm/W 能效: 10.1 能效等级: G
电压: 219.9 V 电流: 0.847 A 功率: 123.400 W 功率因素: 0.662

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:


Rf: 74.5 CCT: 16303K u': 0.1887
Rg: 109.3 LER: 242.1 Duv: -0.00385 v': 0.4191

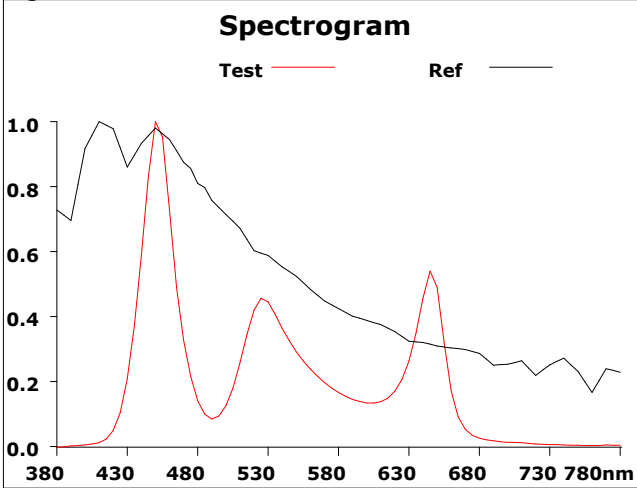

500			
Hue Bin	Rf	Chroma	Hue
1	67.5	16.5%	-0.3%
2	88.4	4.0%	-3.6%
3	85.7	2.7%	-2.0%
4	78.2	2.7%	7.1%
5	78.1	1.0%	5.7%
6	81.8	6.8%	4.6%
7	78.3	-8.3%	-1.0%
8	89.8	-2.8%	2.3%
9	77.3	-7.6%	10.4%
10	69.0	-7.6%	23.2%
11	44.8	-1.7%	25.5%
12	60.8	-1.0%	31.7%
13	59.1	3.3%	24.6%
14	62.4	11.1%	20.7%
15	58.3	30.4%	19.1%
16	76.3	10.5%	1.7%

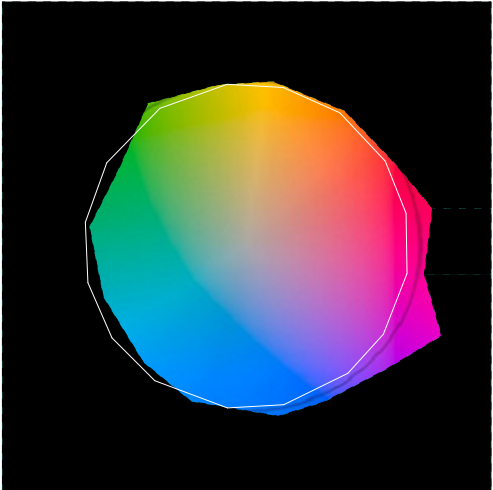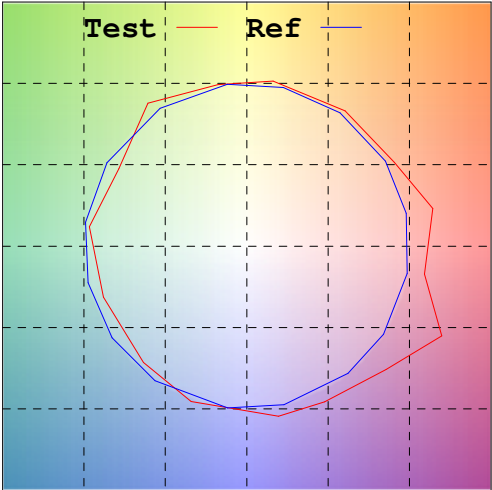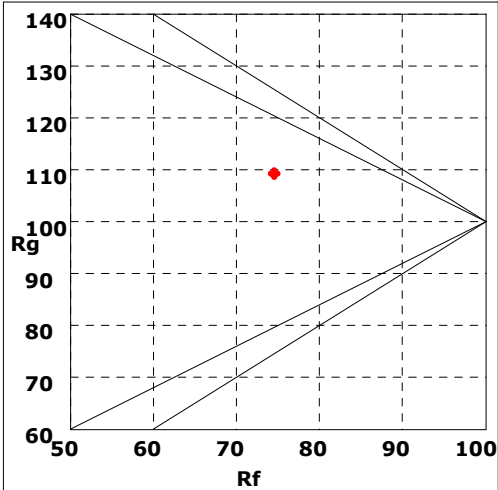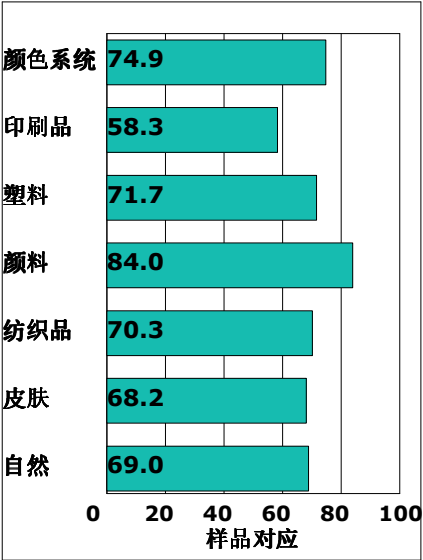

Rf by Bue

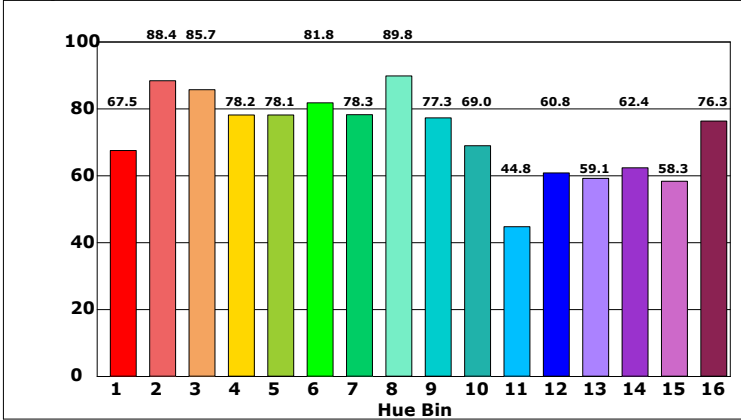

Chroma by Bue

