



光谱图

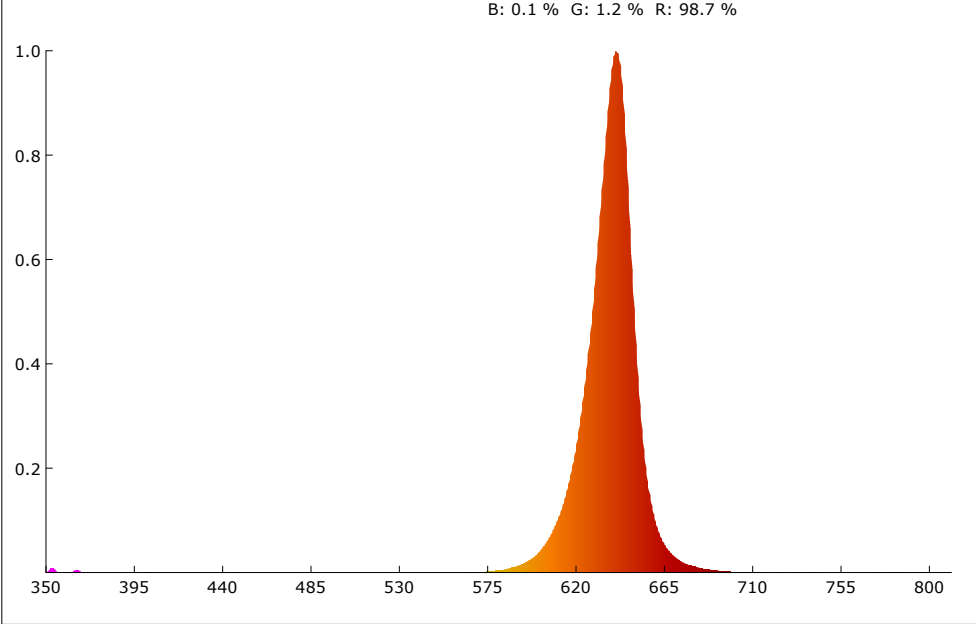

SDCM

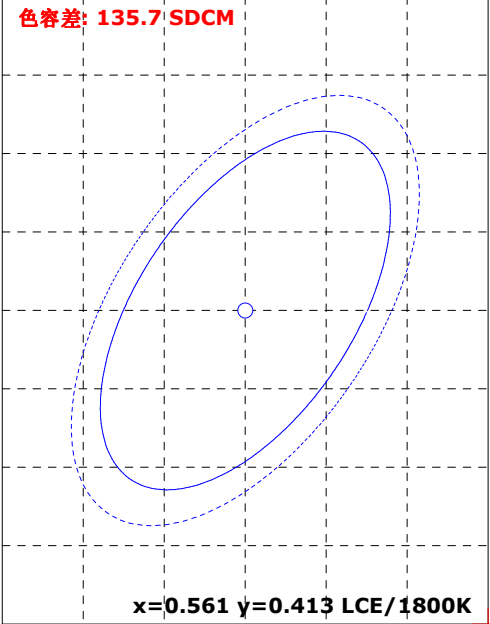

颜色参数:

坐标x: 0.7017 坐标y: 0.2966 坐标u: 0.5444 坐标v: 0.3452 坐标u': 0.5444 坐标v': 0.5178
红色比: 98.7 % 绿色比: 1.2 % 蓝色比: 0.1 % 光通量红色比: 95.3 % 光通量绿色比: 4.7 % 光通量蓝色比: 0.0 %

显色指数: 23.6 AvgR: 20.8
R1: 9.4 R2: 75.6 R3: 43.2 R4: -12.0 R5: 14.4 R6: 89.2 R7: 17.0 R8: -47.4
R9: -99.0 R10: 70.3 R11: -2.0 R12: 79.9 R13: 29.5 R14: 66.1 R15: -21.7


色温: 1000 K 光通量: 201.530 lm 峰值波长: 641.1 nm 色容差: 135.7
明暗视觉比: 0.0 中心波长: 639.5 nm 主波长: 626.9 nm 质心波长: 637.2 nm
半宽度: 21.2 nm 色偏差: 0.15603 色纯度: 99.5 % 色质指数: -nan(ind)
LER(TM-30): 144.3 辐射功率: 1397.0 mw 色域指数(Rg): 68.5 逼真度(Rf): 25.0
红光辐射功率: 1372.3 mw 近红辐射功率: 2.3 mw 远红辐射功率: 1.1 mw

电参数:




光效: 4.3 Lm/W 能效: 4.7 能效等级: G
电压: 220.1 V 电流: 0.353 A 功率: 47.060 W 功率因素: 0.605

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:


Rf: 25.0 CCT: 1000K u': 0.5444
Rg: 68.5 LER: 144.3 Duv: v': 0.5178

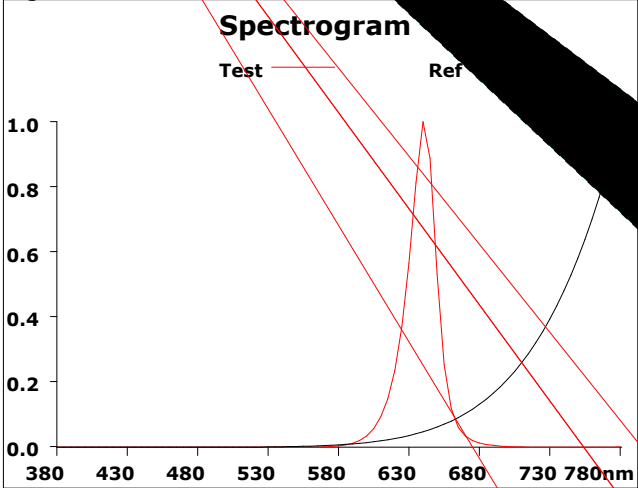


500			
Hue Bin	Rf	Chroma	Hue
1	9.6	-61.0%	26.4%
2	51.0	-45.0%	64.2%
3	64.3	7.5%	97.0%
4	100.0	nan%	-nan(ind)%
5	91.8	24.9%	17.7%
6	100.0	nan%	-nan(ind)%
7	68.9	11.8%	-2.8%
8	17.0	-42.5%	-19.2%
9	4.7	-54.4%	15.1%
10	8.2	65.3%	48.7%
11	56.7	18.8%	61.1%
12	51.7	-90.5%	
13	40.9	5.8%	
14	73.3		
15	81.2		
16	24.8	-38.0%	

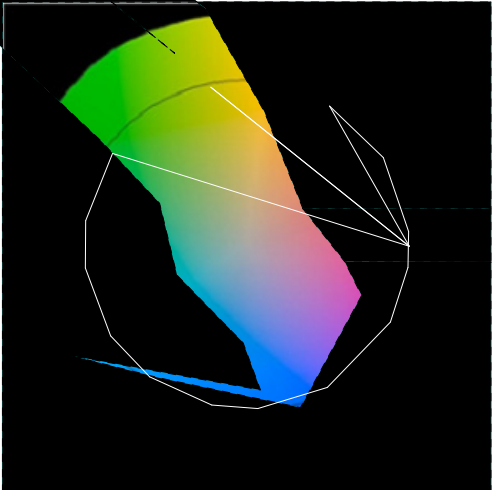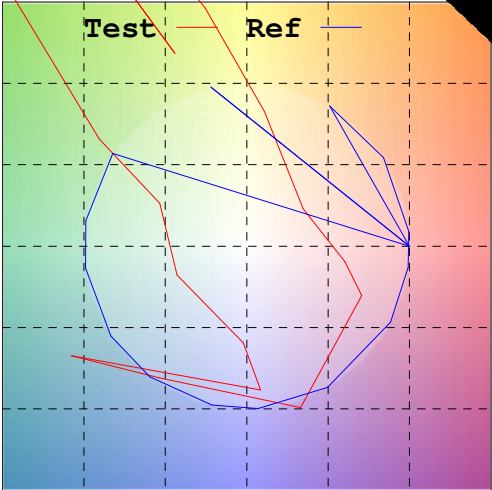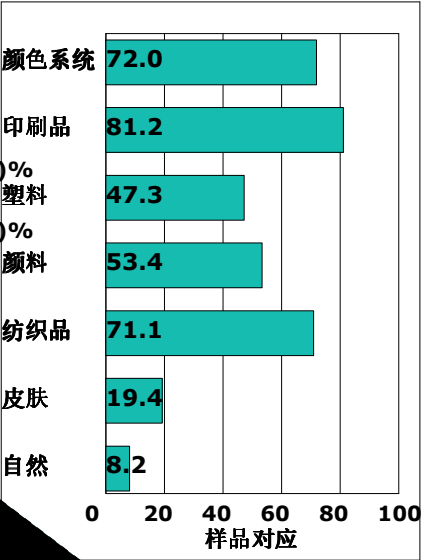

Rf by Bue

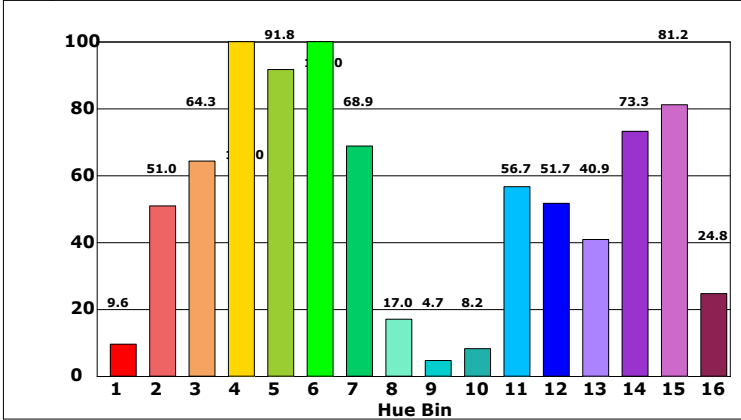

Chroma by Bue

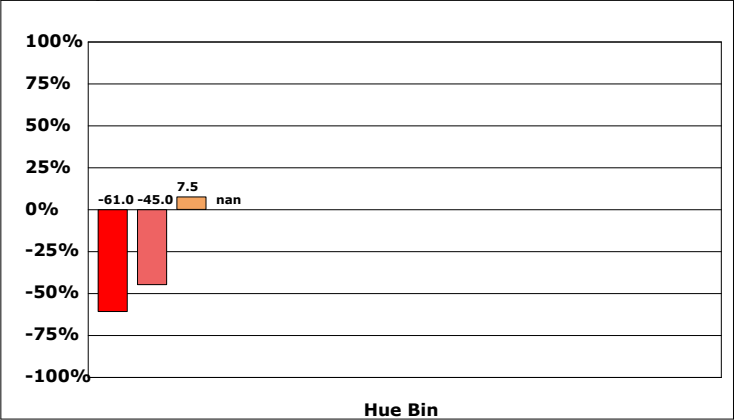

ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173