


光谱图

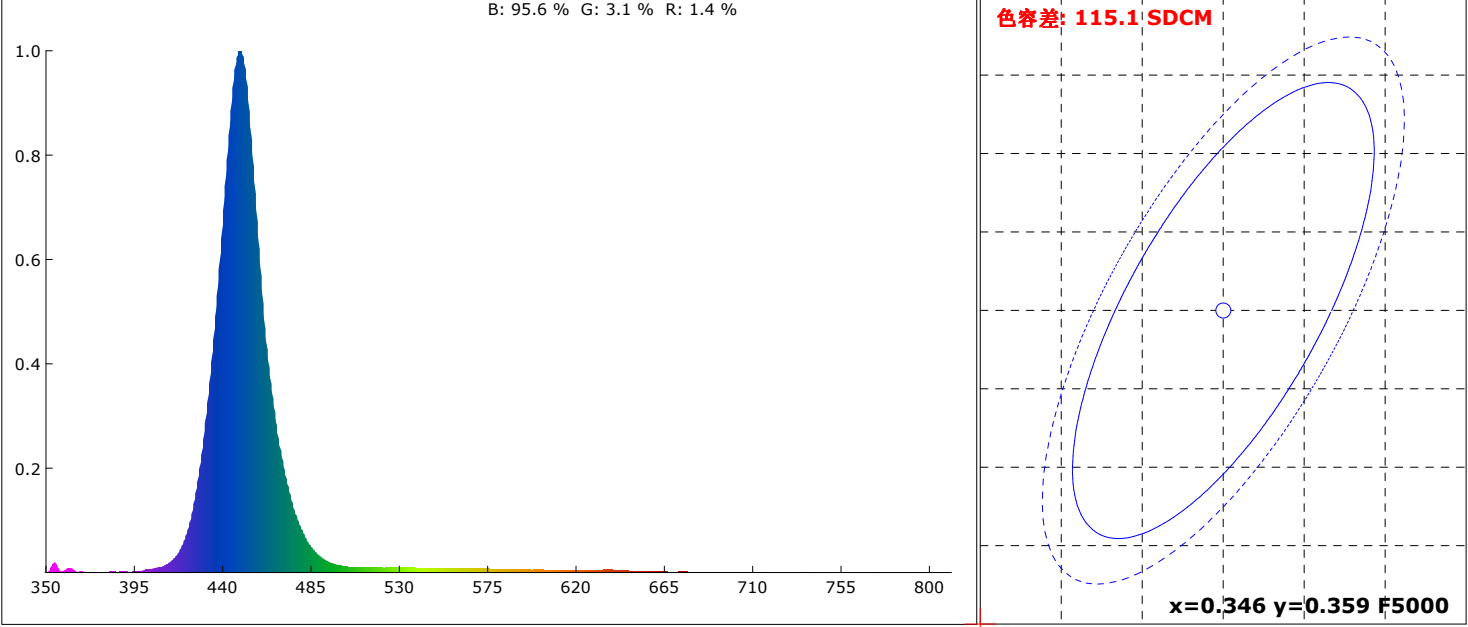

颜色参数:

坐标x: 0.1597 坐标y: 0.0378 坐标u: 0.2038 坐标v: 0.0724 坐标u': 0.2038 坐标v': 0.1086
红色比: 1.4 % 绿色比: 3.1 % 蓝色比: 95.6 % 光通量红色比: 4.7 % 光通量绿色比: 36.4 % 光通量蓝色比: 58.9 %

显色指数: -36.9 AvgR: -36.1
R1: 53.8 R2: -30.0 R3: -99.0 R4: -89.9 R5: 53.7 R6: -24.1 R7: -55.6 R8: -37.6
R9: -85.1 R10: -99.0 R11: -99.0 R12: -81.2 R13: 28.7 R14: -34.5 R15: 56.7


色温: 99999 K 光通量: 124.276 lm 峰值波长: 449.6 nm 色容差: 115.1
明暗视觉比: 15.6 中心波长: 449.2 nm 主波长: 455.1 nm 质心波长: 455.9 nm
半宽度: 24.1 nm 色偏差: 0.05359 色纯度: 95.2 % 色质指数: 0.2
LER(TM-30): 48.8 辐射功率: 2546.2 mw 色域指数(Rg): nan 逼真度(Rf): -nan(ind)
红光辐射功率: 34.3 mw 近红辐射功率: 4.3 mw 远红辐射功率: 0.5 mw

电参数:


光效: 2.2 Lm/W 能效: 2.4 能效等级: G
电压: 220.1 V 电流: 0.411 A 功率: 55.550 W 功率因素: 0.613

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:

Rf: -nan(ind) CCT: 99999K u': 0.2038
Rg: nan LER: 48.8 Duv: 0.05359 v': 0.1086

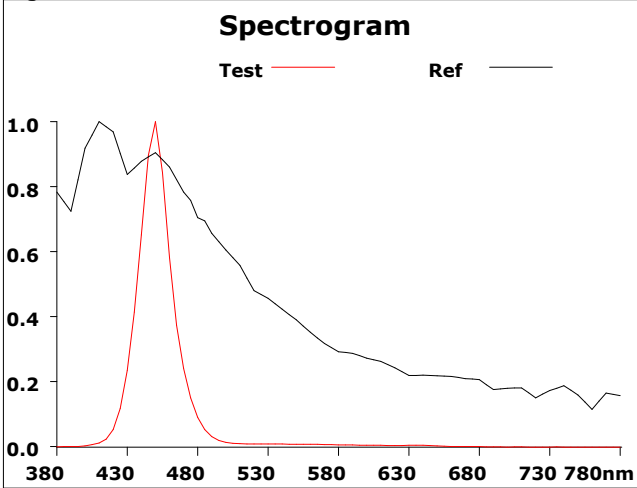

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-153.1%	65.0%
2	0.0	52.0%	-58.4%
3	-nan(ind)	nan%	-nan(ind)%
4	-nan(ind)	nan%	-nan(ind)%
5	-nan(ind)	nan%	-nan(ind)%
6	-nan(ind)	nan%	-nan(ind)%
7	-nan(ind)	nan%	-nan(ind)%
8	-nan(ind)	nan%	-nan(ind)%
9	-nan(ind)	nan%	-nan(ind)%
10	0.0	57.2%	-81.4%
11	0.0	27.8%	-248.3%
12	0.0	-68.4%	-387.5%
13	0.0	-219.3%	-339.8%
14	0.0	-332.6%	-258.0%
15	0.0	-458.5%	-166.9%
16	0.0	-357.9%	8.6%

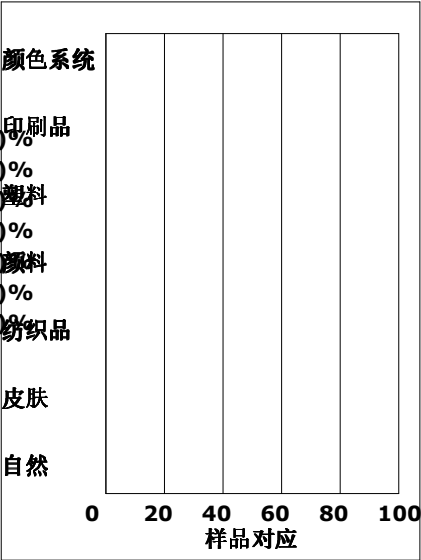

ERROR: rangecheck
OFFENDING COMMAND: roll

STACK:

2
4
-2.14748e+011
-2.14748e+012