



Panto Leko 60T is a 60W tunable COB LED profile spot. Die-casting housing, fan-free design. With 15° - 30° and 25° - 50° zoom lens optional, color temperature adjustable from 2700K - 6000K. It's an idea product for art gallery, museum, shopping mall.


Key features:

- 60W WW + 60W CW constant output LED
- 2700K - 6000K adjustable
- High CRI over 92
- Die-casting aluminum housing, fan-free
- 15° - 30° and 25° - 50° zoom lens optional
- Smooth dimming, flicker free
- Compact body, easy to set up
- DMX control of dimmer
- RDM function available
- IP65, indoor or outdoor use


Application:

- Museum
- Theatre, church
- Shopping mall
- Art gallery
- Restaurant

Accessories:




Panto Leko 60T  
60W tunable LED profile spot

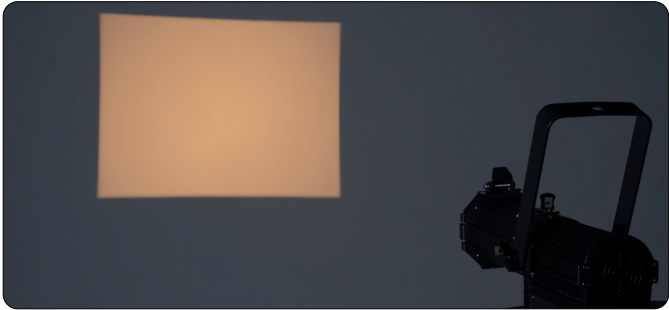

Photometric 15° - 30°


|              |       |      |      |     |     |
|--------------|-------|------|------|-----|-----|
| WW(lx)       | 9820  | 2370 | 1070 | 630 | 415 |
| CW(lx)       | 9910  | 2890 | 1290 | 752 | 506 |
| Full on (lx) | 11500 | 2730 | 1240 | 715 | 480 |

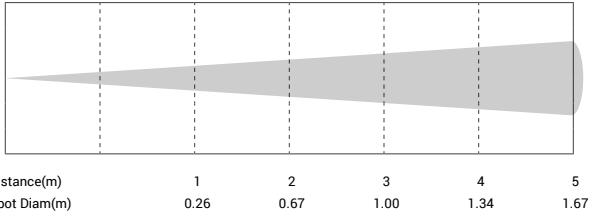

Min. Spot - 15°

Photometric 25° - 50°

|              |      |      |      |     |     |
|--------------|------|------|------|-----|-----|
| WW(lx)       | 7070 | 1530 | 714  | 375 | 252 |
| CW(lx)       | 8690 | 1940 | 872  | 470 | 307 |
| Full on (lx) | 8080 | 3877 | 1830 | 826 | 430 |

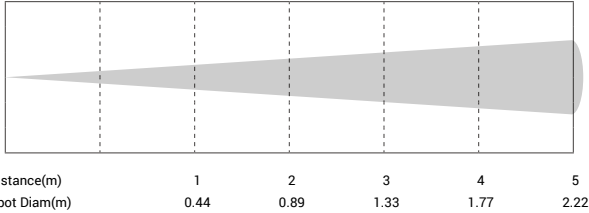


Min. Spot - 25°

Technical Data


|                    |                               |
|--------------------|-------------------------------|
| Power supply:      | AC100 - 240V, 50/60Hz         |
| Light source:      | 60W WW + 60W CW LED           |
| Color temperature: | 2700K - 6000K adjustable      |
| Zoom range:        | 15° - 30°, 25° - 50° optional |
| Color Rendition:   | Avg. CRI 92                   |
| Power connection:  | Powercon True1 in             |
| Signal connection: | 3-pin XLR in & out            |
| Control channels:  | 1/2/3/5                       |

|              |      |      |     |     |     |
|--------------|------|------|-----|-----|-----|
| WW(lx)       | 5220 | 1210 | 543 | 314 | 205 |
| CW(lx)       | 6444 | 1470 | 648 | 384 | 251 |
| Full on (lx) | 6130 | 1390 | 629 | 364 | 237 |

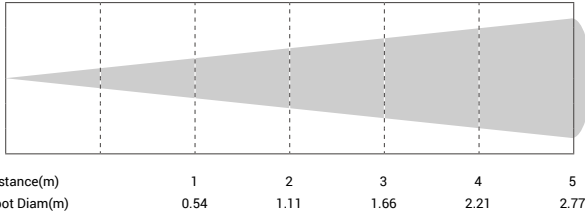

Max. Spot - 30°

|              |      |     |     |     |     |
|--------------|------|-----|-----|-----|-----|
| WW(lx)       | 2720 | 699 | 315 | 180 | 125 |
| CW(lx)       | 3430 | 860 | 392 | 233 | 151 |
| Full on (lx) | 3210 | 819 | 370 | 212 | 148 |

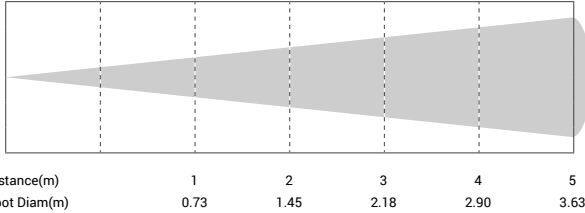

Max. Spot - 50°

|               |                                                  |
|---------------|--------------------------------------------------|
| Control mode: | DMX, RDM                                         |
| Housing:      | Color black, die-casting aluminum                |
| Size:         | 340 x 164 x 288mm                                |
| N.W.:         | 3 kg                                             |
| G.W.:         | 4 kg                                             |
| Accessories:  | Power cable, Gel frame, Gobo holder, Safety rope |
| Environment:  | IP65                                             |