



光谱图

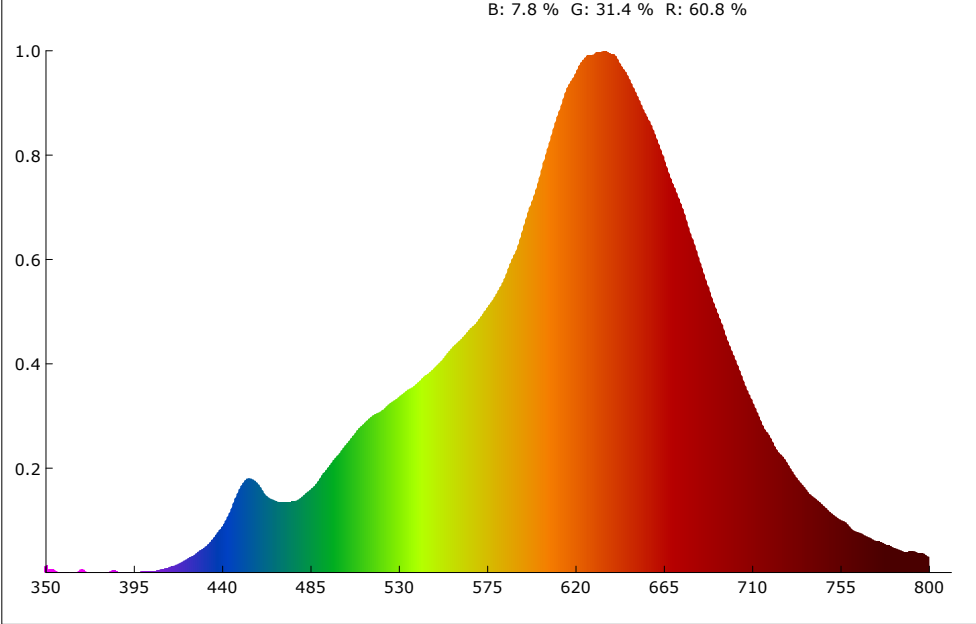

SDCM

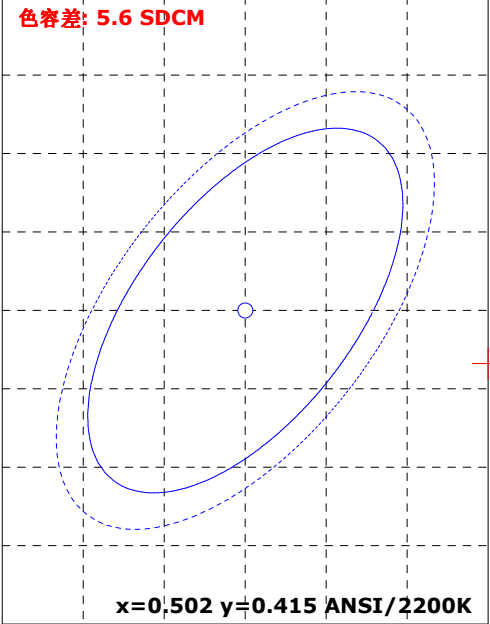

颜色参数:

坐标x: 0.4911 坐标y: 0.4067 坐标u: 0.2848 坐标v: 0.3537 坐标u': 0.2848 坐标v': 0.5306
红色比: 60.8 % 绿色比: 31.4 % 蓝色比: 7.8 % 光通量红色比: 31.0 % 光通量绿色比: 67.7 % 光通量蓝色比: 1.3 %

显色指数: 94.6 AvgR: 93.6
R1: 97.1 R2: 96.6 R3: 98.0 R4: 95.7 R5: 95.1 R6: 90.0 R7: 93.4 R8: 91.6
R9: 84.8 R10: 93.5 R11: 90.1 R12: 84.8 R13: 96.2 R14: 98.9 R15: 97.9


色温: 2288 K 光通量: 10305.218 lm 峰值波长: 634.5 nm 色容差: 5.6
明暗视觉比: 1.1 中心波长: 632.9 nm 主波长: 587.5 nm 质心波长: 616.5 nm
半宽度: 117.7 nm 色偏差: -0.00280 色纯度: 69.5 % 色质指数: 84.3
LER(TM-30): 241.7 辐射功率: 42643.2 mw 色域指数(Rg): 103.0 逼真度(Rf): 94.0
红光辐射功率: 23298.5 mw 近红辐射功率: 4052.3 mw 远红辐射功率: 248.7 mw

电参数:




光效: 27.8 Lm/W 能效: 30.2 能效等级: G
电压: 220.7 V 电流: 1.700 A 功率: 371.000 W 功率因素: 0.989

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/16/14
备注:


Rf: 94.0 CCT: 2288K u': 0.2848
Rg: 103.0 LER: 241.7 Duv: -0.00280 v': 0.5306

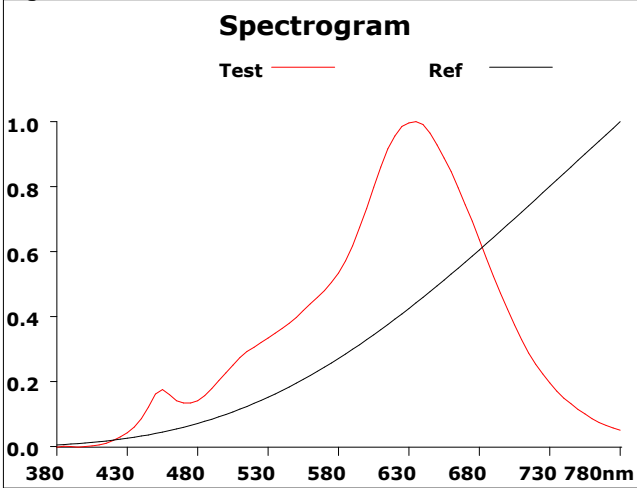

500			
Hue Bin	Rf	Chroma	Hue
1	95.4	-1.8%	0.5%
2	96.1	-0.1%	1.2%
3	93.0	1.5%	1.8%
4	96.1	1.2%	-0.4%
5	95.9	2.2%	1.0%
6	92.5	4.5%	1.4%
7	95.4	2.0%	-1.3%
8	93.5	3.7%	-1.6%
9	95.7	1.8%	-0.7%
10	96.0	1.5%	-1.3%
11	94.3	3.2%	-1.5%
12	91.2	2.8%	-4.4%
13	87.3	3.1%	-10.7%
14	83.6	1.3%	-11.5%
15	94.6	-0.7%	-3.0%
16	91.0	-1.8%	-5.5%

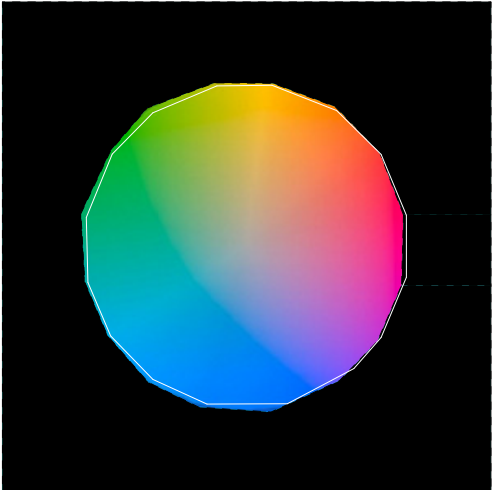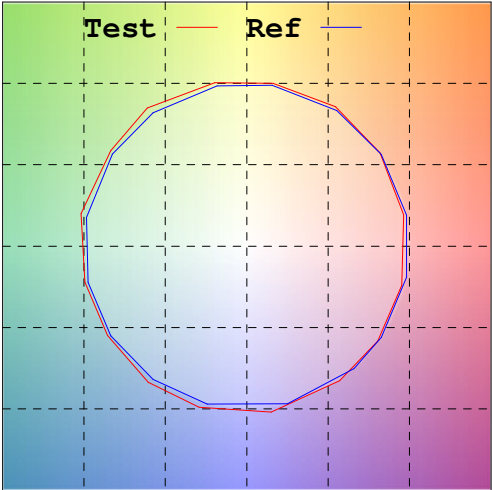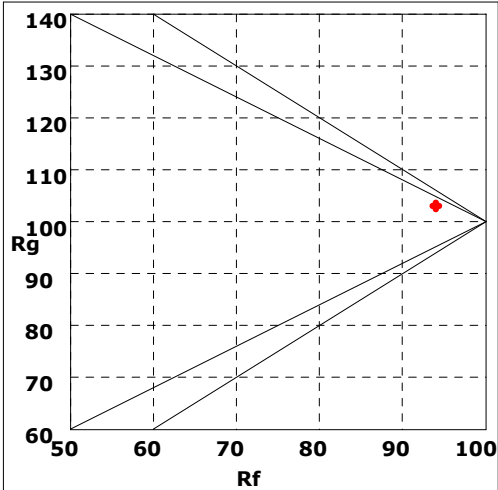

Rf by Bue

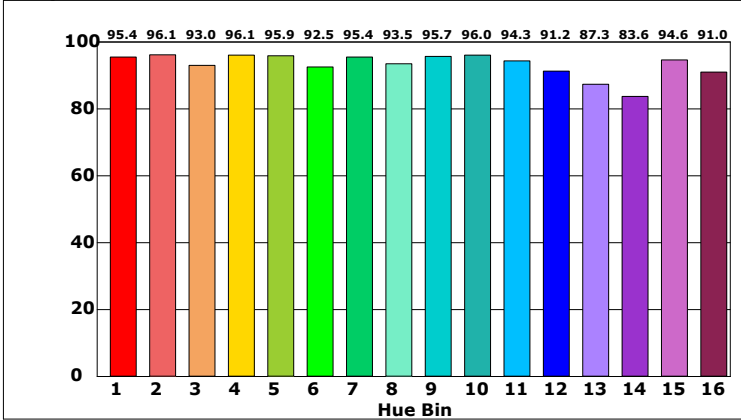

Chroma by Bue

