NB3V8312C

Ultra−Low Jitter, Low Skew 1:12 LVCMOS/LVTTL Fanout Buffer

The NB3V8312C is a high performance, low skew LVCMOS fanout buffer which can distribute 12 ultra−low jitter clocks from an LVCMOS/LVTTL input up to 250 MHz.

The 12 LVCMOS output pins drive 50 Ω series or parallel terminated transmission lines. The outputs can also be disabled to a high impedance (tri−stated) via the OE input, or enabled when High.

The NB3V8312C provides an enable input, CLK_EN pin, which synchronously enables or disables the clock outputs while in the LOW state. Since this input is internally synchronized to the input clock, changing only when the input is LOW, potential output glitching or runt pulse generation is eliminated.

Separate V_{DD} core and V_{DDO} output supplies allow the output buffers to operate at the same supply as the V_{DD} (V_{DD} = V_{DDO}) or from a lower supply voltage. Compared to single−supply operation, dual supply operation enables lower power consumption and output−level compatibility.

The V_{DD} core supply voltage can be set to 3.3 V, 2.5 V or 1.8 V, while the V_{DDO} output supply voltage can be set to 3.3 V, 2.5 V, or 1.8 V, with the constraint that $V_{DD} \geq V_{DDO}$.

This buffer is ideally suited for various networking, telecom, server and storage area networking, RRU LO reference distribution, medical and test equipment applications.

Features

- Power Supply Modes:

V_{DD} (Core)	/ V_{DDO} (Outputs)
3.3 V	/ 3.3 V
3.3 V	/ 2.5 V
3.3 V	/ 1.8 V
2.5 V	/ 2.5 V
2.5 V	/ 1.8 V
1.8 V	/ 1.8 V


- 250 MHz Maximum Clock Frequency
- Accepts LVCMOS, LVTTL Clock Inputs
- LVCMOS Compatible Control Inputs
- 12 LVCMOS Clock Outputs
- Synchronous Clock Enable
- Output Enable to High Z State Control
- 150 ps Max. Skew Between Outputs
- Temp. Range −40°C to +85°C
- 32−pin LQFP and QFN Packages
- These are Pb−Free Devices

ON Semiconductor®

http://onsemi.com



LQFP−32
FA SUFFIX
CASE 873A



QFN32
MN SUFFIX
CASE 488AM

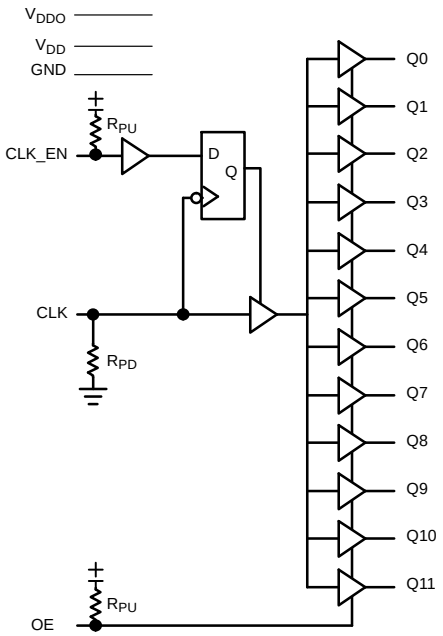


Figure 1. Simplified Logic Diagram

ORDERING AND MARKING INFORMATION

See detailed ordering and shipping information on page 9 of this data sheet.

Applications

- Networking
- Telecom
- Storage Area Network

End Products

- Servers
- Routers
- Switches

© Semiconductor Components Industries, LLC, 2014

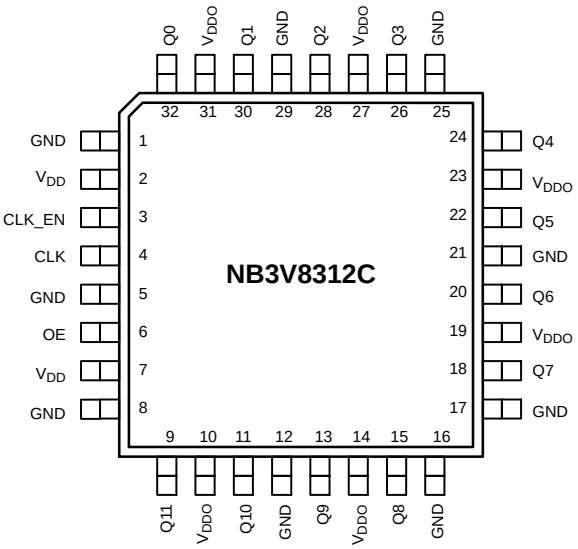


Figure 2. LQFP−32 Pinout Configuration
(Top View)

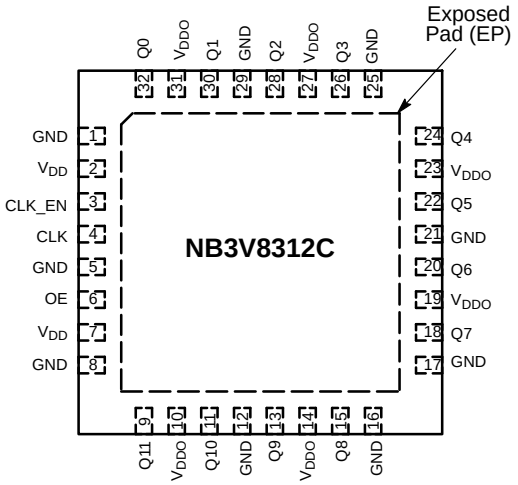


Figure 3. QFN32 Pinout Configuration
(Top View)

Table 1. PIN DESCRIPTION

Pin	Name	I/O	Open Default	Description
1, 5, 8, 12, 16, 17, 21, 25, 29	GND	Power		Ground, Negative Power Supply
2, 7	VDD	Power		Positive Supply for Core and Inputs
3	CLK_EN	Input	High	Synchronous Clock Enable Input. When High, outputs are enabled. When Low, outputs are disabled Low. Internal Pullup Resistor.
4	CLK	Input	Low	Single−ended Clock input; LVCMOS/LVTTL. Internal Pull−down Resistor.
6	OE	Input	High	Output Enable. Internal Pullup Resistor.
9, 11, 13, 15, 18, 20, 22, 24, 26, 28, 30, 32	Q11, Q10, Q9, Q8, Q7, Q6, Q5, Q4, Q3, Q2, Q1, Q0	Output		Single−ended LVCMOS/LVTTL outputs
10, 14, 19, 23, 27, 31	VDDO	Power		Positive Supply for Outputs
−	EP	−	−	The Exposed Pad (EP) on the package bottom is thermally connected to the die for improved heat transfer out of package. The exposed pad must be attached to a heat−sinking conduit. The pad is connected to the die and must only be connected electrically to GND on the PC board.

1. All VDD, VDDO and GND pins must be externally connected to a power supply to guarantee proper operation. Bypass each supply pin with 0.01 μF to GND.

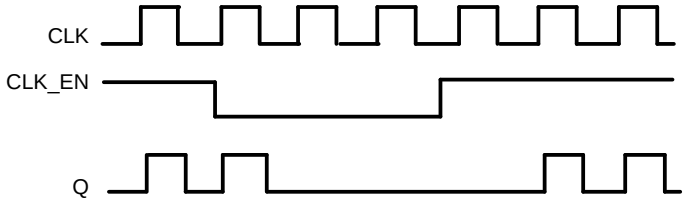


Figure 4. CLK_EN Control Timing Diagram

Table 2. OE, CLK_EN FUNCTION TABLES

Inputs			**Outputs**
OE	**CLK_EN** (Note 2)	**CLK**	**Q[0:11]**
0	X	X	Hi−Z
1	0	X	Low
1	1	0	Low
1	1	1	High

2. The CLK_EN control input synchronously enables or disables the outputs as shown in Figure 4. This control latches on the falling edge of the selected input CLK. When CLK_EN is LOW, the outputs are disabled in a LOW state. When CLK_EN is HIGH, the outputs are enabled as shown. CLK_EN to CLK Set up and Hold times must be satisfied.

Table 3. ATTRIBUTES (Note 3)

Characteristics		Value
Internal Input Pullup (R_{PU}) and Pulldown (R_{PD}) Resistor		50 kΩ
Input Capacitance, C_{IN}		4 pF
Power Dissipation Capacitance, C_{PD} (per Output)		20 pF
R_{OUT}		8 Ω
ESD Protection	Human Body Model Machine Model	> 1.5 kV > 200 V
Moisture Sensitivity (Note 3)	LQFP QFN	Level 2 Level 1
Flammability Rating Oxygen Index		UL−94 code V−0 A 1/8” 28 to 34
Transistor Count		464 Devices
Meets or exceeds JEDEC Spec EIA/JESD78 IC Latchup Test		

3. For additional information, see Application Note AND8003/D.

Table 4. MAXIMUM RATINGS (Note 4)

Symbol	Parameter	Condition		Rating	Unit
V_{DD} / V_{DDO}	Positive Power Supply	GND = 0 V		4.6	V
V_I	Input Voltage			$-0.5 \le V_I \le V_{DD} + 0.5$	V
T_{stg}	Storage Temperature Range			−65 to +150	°C
θ_{JA}	Thermal Resistance (Junction−to−Ambient) (Note 5)	0 lfpm 500 lfpm	LQFP−32 LQFP−32	80 55	°C/W °C/W
θ_{JC}	Thermal Resistance (Junction−to−Case) (Note 5)	Standard Board	LQFP−32 LQFP−32	12−17	°C/W
θ_{JA}	Thermal Resistance (Junction−to−Ambient) (Note 5)	0 lfpm 500 lfpm	QFN – 32 QFN – 32	31 27	°C/W
θ_{JC}	Thermal Resistance (Junction−to−Case) (Note 5)	Standard Board	QFN – 32	12	°C/W

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

4. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and not valid simultaneously. If stress limits are exceeded device functional operation is not implied, damage may occur and reliability may be affected.
5. JEDEC standard multilayer board − 2S2P (2 signal, 2 power).

Table 5. LVCMOS/LVTTL DC CHARACTERISTICS (T_A = −40°C to +85°C)

Symbol	Characteristics		Conditions	Min	Typ	Max	Unit
V_{IH}	Input High Voltage		V_{DD} = 3.465 V	2.0		V_{DD} + 0.3	V
			V_{DD} = 2.625 V	1.7		V_{DD} + 0.3	V
			V_{DD} = 2.0 V	0.65 x V_{DD}		V_{DD} + 0.3	V
V_{IL}	Input Low Voltage		V_{DD} = 3.465 V	−0.3		1.3	V
			V_{DD} = 2.625 V	−0.3		0.7	V
			V_{DD} = 2.0 V	−0.3		0.35 x V_{DD}	V
I_{IH}	Input High Current	CLK	V_{DD} = V_{IN} = 3.465 V or 2.625 V or 2.0 V			150	μA
		OE, CLK_EN				5	
I_{IL}	Input Low Current	CLK	V_{DD} = 3.465 V or 2.625 V or 2.0 V, V_{IN} = 0 V	−5			μA
		OE, CLK_EN		−150			
V_{OH}	Output High Voltage (Note 6)		V_{DDO} = 3.3 V ±5%	2.6			V
			V_{DDO} = 2.5 V ±5%	1.8			
			V_{DDO} = 2.5 V ±5%; I_{OH} = −1 mA	2.0			
			V_{DDO} = 1.8 V ±0.2 V	V_{DD} − 0.4			
			V_{DDO} = 1.8 V ±0.2 V; I_{OH} = −100 μA	V_{DD} − 0.2			
V_{OL}	Output Low Voltage (Note 6)		V_{DDO} = 3. 3V ±5%			0.5	V
			V_{DDO} = 2.5 V ±5%			0.45	
			V_{DDO} = 2.5 V ±5%; I_{OL} = 1 mA			0.4	
			V_{DDO} = 1.8 V ±0.2 V			0.35	
			V_{DDO} = 1.8 V ±0.2 V; I_{OL} = 100 μA			0.2	

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lfpm. Electrical parameters are guaranteed only over the declared operating temperature range. Functional operation of the device exceeding these conditions is not implied. Device specification limit values are applied individually under normal operating conditions and not valid simultaneously.

6. Outputs terminated 50 Ω to V_{DDO}/2 unless otherwise specified. See Figure 7.

Table 6. POWER SUPPLY DC CHARACTERISTICS, (T_A = −40°C to +85°C)

V_{DD} (Core)	V_{DDO} (Outputs)	Min	Typ	Max	Unit
3.3 V ±5%	3.3 V ±5%			10	mA
3.3 V ±5%	2.5 V ±5%			10	mA
3.3 V ±5%	1.8 V ± 0.2V			10	mA
2.5 V ±5%	2.5 V ±5%			10	mA
2.5 V ±5%	1.8 V ± 0.2V			10	mA
1.8 V ± 0.2 V	1.8 V ± 0.2V			10	mA

Table 7. AC CHARACTERISTICS (T_A = −40°C to +85°C) (Note 7)

Symbol	Characteristic		Min	Typ	Max	Unit
f_{MAX}	Maximum Operating Frequency	V_{DD} / V_{DDO}				
		3.3 V ±5% / 3.3 V ±5%	250			MHz
		3.3 V ±5% / 2.5 V ±5%	250			
		3.3 V ±5% / 1.8 V ± 0.2 V	200			
		2.5 V ±5% / 2.5 V ±5%	250			
		2.5 V ±5% / 1.8 V ± 0.2 V	200			
		1.8 V ± 0.2 V / 1.8 V ± 0.2 V	200			
t_{pLH}	Propagation Delay, Low to High; (Note 8)	V_{DD} / V_{DDO}				
		3.3 V ±5% / 3.3 V ±5%	0.9		2.2	ns
		3.3 V ±5% / 2.5 V ±5%	1.0		2.3	
		3.3 V ±5% / 1.8 V ± 0.2 V	1.0		3.0	
		2.5 V ±5% / 2.5 V ±5%	1.3		3.1	
		2.5 V ±5% / 1.8 V ± 0.2 V	1.3		3.5	
		1.8 V ± 0.2 V / 1.8 V ± 0.2 V	2.4		4.2	
t_{jit}	Additive Phase Jitter, RMS;	V_{DD} / V_{DDO}				
	f_C = 100 MHz	3.3 V ±5% / 3.3 V ±5%		30		fs
	Integration Range: 12 kHz − 20 MHz	3.3 V ±5% / 2.5 V ±5%		40		
	See Figure 5	3.3 V ±5% / 1.8 V ± 0.2 V		50		
		2.5 V ±5% / 2.5 V ±5%		20		
		2.5 V ±5% / 1.8 V ± 0.2 V		100		
		1.8 V ± 0.2 V / 1.8 V ± 0.2 V		130		
$t_{sk(o)}$	Output−to−output skew; (Note 9); Figure 6	V_{DD} / V_{DDO}				
		3.3 V ±5% / 3.3 V ±5%			125	ps
		3.3 V ±5% / 2.5 V ±5%			135	
		3.3 V ±5% / 1.8 V ± 0.2 V			145	
		2.5 V ±5% / 2.5 V ±5%			150	
		2.5 V ±5% / 1.8 V ± 0.2 V			150	
		1.8 V ± 0.2 V / 1.8 V ± 0.2 V			140	
$t_{sk(pp)}$	Part−to−Part Skew; (Note 10)	V_{DD} / V_{DDO}				
		3.3 V ±5% / 3.3 V ±5%			250	ps
		3.3 V ±5% / 2.5 V ±5%			250	
		3.3 V ±5% / 1.8 V ± 0.2 V			250	
		2.5 V ±5% / 2.5 V ±5%			250	
		2.5 V ±5% / 1.8 V ± 0.2 V			250	
		1.8 V ± 0.2 V / 1.8 V ± 0.2 V			250	
t_r/t_f	Output rise and fall times	V_{DD} / V_{DDO}				
		3.3 V ±5% / 3.3 V ±5%	200		700	ps
		3.3 V ±5% / 2.5 V ±5%	200		700	
		3.3 V ±5% / 1.8 V ± 0.2 V	200		700	
		2.5 V ±5% / 2.5 V ±5%	200		700	
		2.5 V ±5% / 1.8 V ± 0.2 V	200		700	
		1.8 V ± 0.2 V / 1.8 V ± 0.2 V	200		800	
ODC	Output Duty Cycle (Note 11)	V_{DD} / V_{DDO}				
		f ≤ 200 MHz, 3.3 V ±5% / 3.3 V ±5%	45		55	%
		f ≤ 150 MHz, 3.3 V ±5% / 2.5 V ±5%	45		55	
		f ≤ 100 MHz, 3.3 V ±5% / 1.8 V ± 0.2 V	45		55	
		f ≤ 150 MHz, 2.5 V ±5% / 2.5 V ±5%	45		55	
		f ≤ 100 MHz, 2.5 V ±5% / 1.8 V ± 0.2 V	45		55	
		f ≤ 100 MHz, 1.8 V ± 0.2 V / 1.8 V ± 0.2 V	45		55	

All parameters measured at f_{MAX} unless noted otherwise.

7. Outputs loaded with 50 Ω to V_{DDO}/2; see Figure 7. CLOCK input with 50% duty cycle; minimum input amplitude = 1.2 V at V_{DD} = 3.3 V, 1.0 V at V_{DD} = 2.5 V, V_{DD}/2 at V_{DD} = 1.8 V.
8. Measured from the V_{DD}/2 of the input to V_{DDO}/2 of the output.
9. Defined as skew between outputs at the same supply voltage and with equal load conditions. Measured at V_{DDO}/2.
10. Defined as skew between outputs on different devices operating at the same supply voltage and with equal load conditions. Using the same type of input on each device, the output is measured at V_{DDO}/2.
11. Clock input with 50% duty cycles, rail−to−rail amplitude and t_r/t_f = 500 ps.

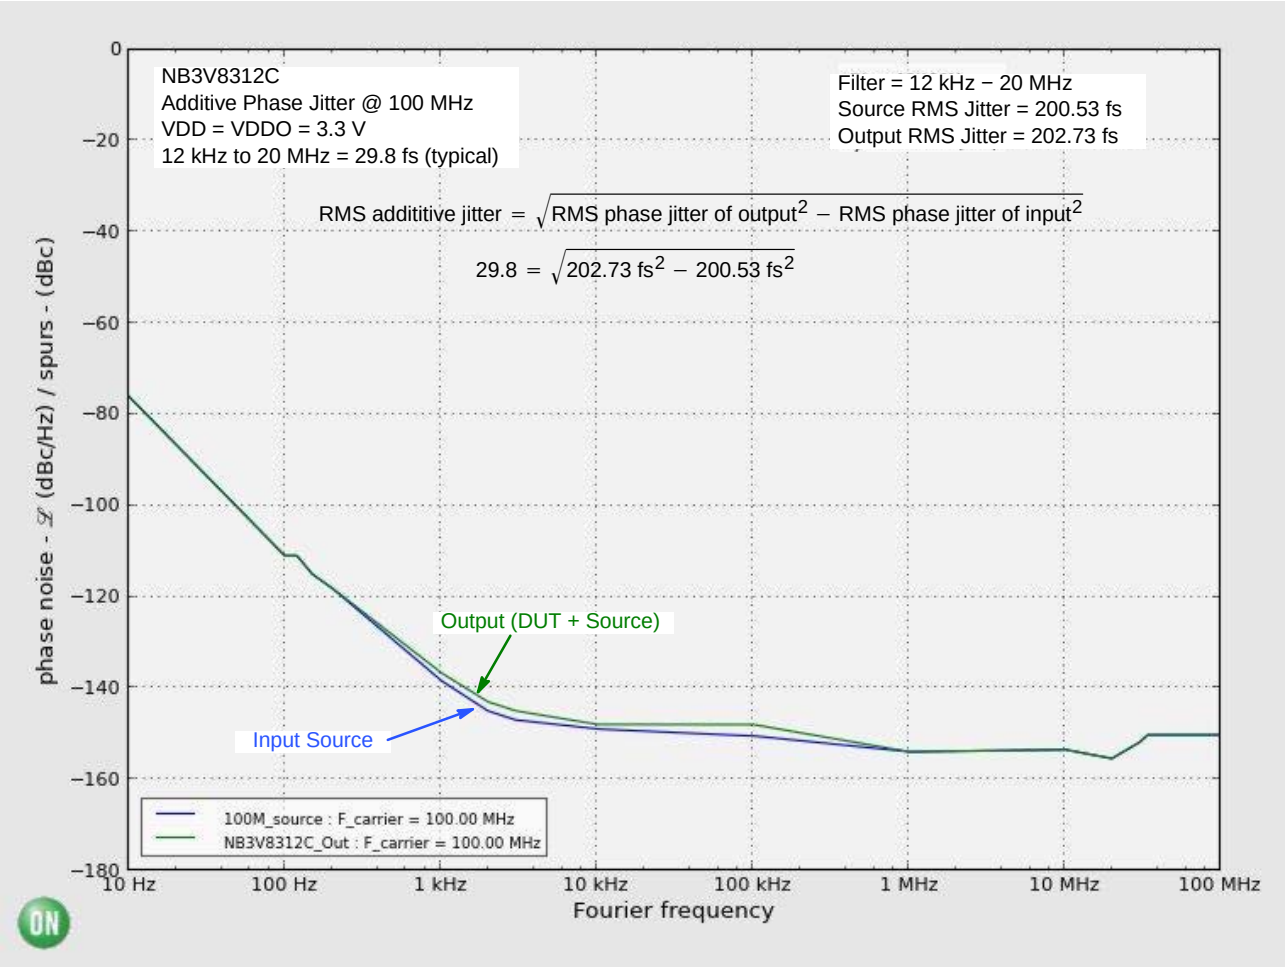


Figure 5. Typical Phase Noise Plot at $f_{carrier}$ = 100 MHz at an Operating Voltage of 3.3 V, Room Temperature

The above phase noise data was captured using Agilent E5052A/B. The data displays the input phase noise and output phase noise used to calculate the additive phase jitter at a specified integration range. The RMS Phase Jitter contributed by the device (integrated between 12 kHz and 20 MHz) is 29.8 fs.

The additive phase jitter performance of the fanout buffer is highly dependent on the phase noise of the input source.

To obtain the most accurate additive phase noise measurement, it is vital that the source phase noise be notably lower than that of the DUT. If the phase noise of the source is greater than the device under test output, the source noise will dominate the additive phase jitter calculation and lead to an artificially low result for the additive phase noise measurement within the integration range. The Figure above is a good example of the NB3V8312C source generator phase noise having a significantly higher floor such that the DUT output results in an additive phase jitter of 29.8 fs.

$$\text{RMS addititive jitter} = \sqrt{\text{RMS phase jitter of output}^2 - \text{RMS phase jitter of input}^2}$$

$$29.8 = \sqrt{202.73\ \text{fs}^2 - 200.53\ \text{fs}^2}$$

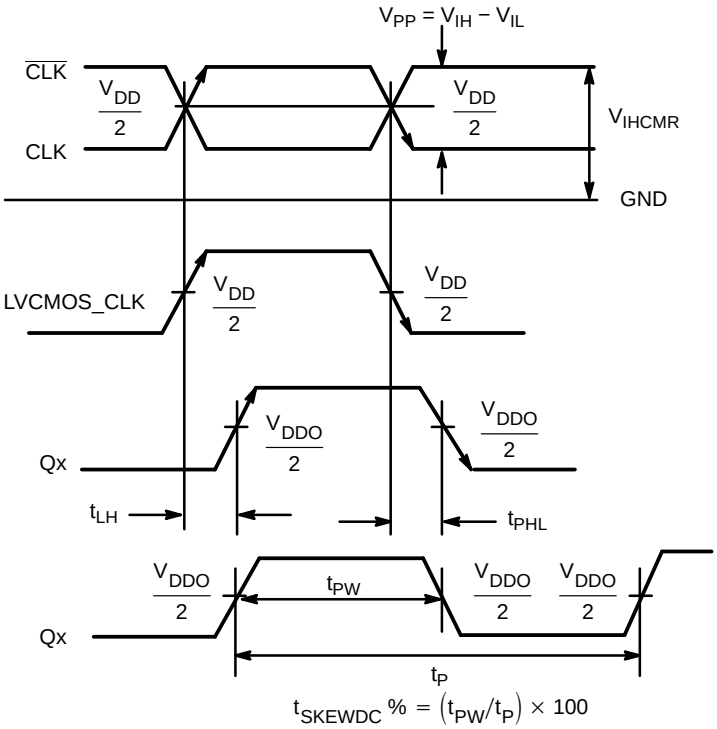


Figure 6. AC Reference Measurement


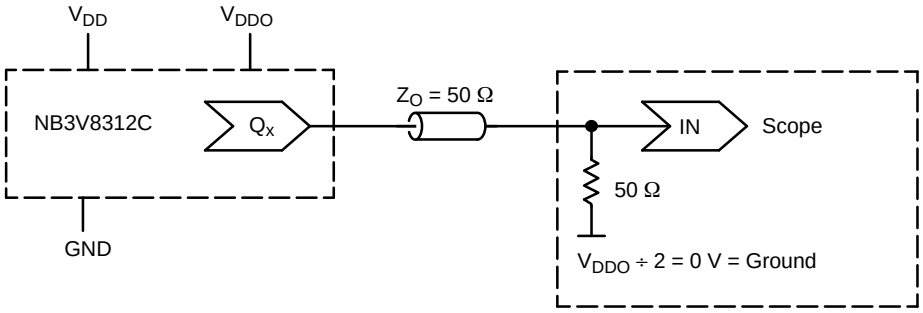


Figure 7. Typical Device Evaluation and Termination Setup − See Table 8


Table 8. TEST SUPPLY SETUP. V_{DDO} SUPPLY MAY BE CENTERED ON 0.0 V (SCOPE GND) TO PERMIT DIRECT CONNECTION INTO "50 Ω TO GND" SCOPE MODULE. V_{DD} SUPPLY TRACKS DUT GND PIN

Spec Condition:	V_{DD} Test Setup	VDDO Test Setup	GND Pin Test Setup
V_{DD} = 3.3 V ±5%, V_{DDO} = 3.3 V ±5%	+1.65 ±5%	+1.65 V ±5%	−1.65 V ±5%
V_{DD} = 3.3 V ±5%, V_{DDO} = 2.5 V ±5%	+2.05 V ±5%	+1.25 V ±5%	−1.25 V ±5%
V_{DD} = 3.3 V ±5%, V_{DDO} = 1.8 V ±5%	+2.4 V ±5%	+0.9 V ±0.1 V	−0.9 V ±0.1 V
V_{DD} = 2.5 V ±5%, V_{DDO}O = 2.5 V ±5%	+1.25 V ±5%	+1.25 V ±5%	−1.25 V ±5%
V_{DD} = 2.5 V ±5%, V_{DDO} = 1.8 V ±0.2 V	+1.6 V ±5%	+0.9 V ±0.1 V	−0.9 V ±0.1 V
V_{DD} = 1.8 V ±0.2 V, V_{DDO} = 1.8 V ±0.2 V	+0.9 V ±0.1 V	+0.9 V ±0.1 V	−0.9 V ±0.1 V

MARKING DIAGRAMS*



LQFP−32



QFN32

A = Assembly Location
WL = Wafer Lot
YY = Year
WW = Work Week
G = Pb−Free Package

(*Note: Microdot may be in either location)

*For additional marking information, refer to Application Note AND8002/D.

ORDERING INFORMATION

Device	Package	Shipping†
NB3V8312CFAG	LQFP−32 (Pb−Free)	250 Units / Tray
NB3V8312CFAR2G	LQFP−32 (Pb−Free)	2000 / Tape & Reel
NB3V8312CMNG	QFN32 (Pb−Free)	74 Units / Rail
NB3V8312CMNR4G	QFN32 (Pb−Free)	1000 / Tape & Reel


†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

MECHANICAL CASE OUTLINE
PACKAGE DIMENSIONS


ON Semiconductor®


QFN32 5x5, 0.5P
CASE 488AM
ISSUE A

DATE 23 OCT 2013




SCALE 2:1

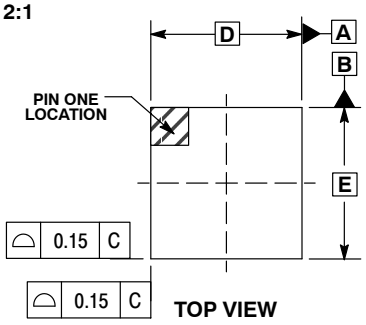





DETAIL A
ALTERNATE TERMINAL CONSTRUCTIONS



DETAIL B
ALTERNATE CONSTRUCTION

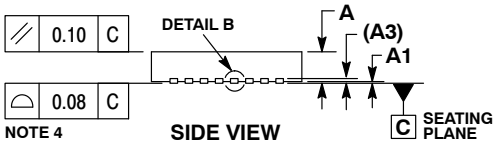


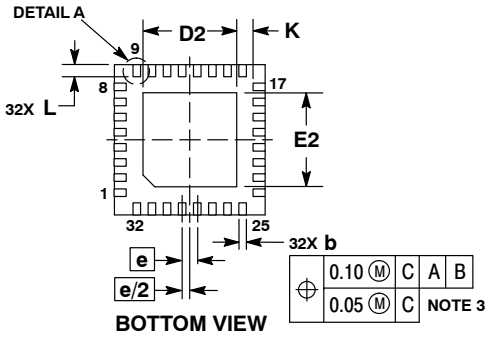

NOTES:
1. DIMENSIONS AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30MM FROM THE TERMINAL TIP.
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

	MILLIMETERS	
DIM	MIN	MAX
A	0.80	1.00
A1	---	0.05
A3	0.20 REF	
b	0.18	0.30
D	5.00 BSC	
D2	2.95	3.25
E	5.00 BSC	
E2	2.95	3.25
e	0.50 BSC	
K	0.20	---
L	0.30	0.50
L1	---	0.15

GENERIC MARKING DIAGRAM*




XXXXX = Specific Device Code
A = Assembly Location
WL = Wafer Lot
YY = Year
WW = Work Week
▪ = Pb−Free Package

(Note: Microdot may be in either location)

*This information is generic. Please refer to device data sheet for actual part marking.
Pb−Free indicator, "G" or microdot " ▪", may or may not be present.

RECOMMENDED SOLDERING FOOTPRINT*

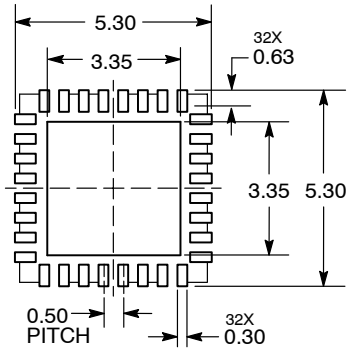

DIMENSION: MILLIMETERS

*For additional information on our Pb−Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	**98AON20032D**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	**QFN32 5x5 0.5P**	**PAGE 1 OF 1**

ON Semiconductor and ON are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2019

onsemi, ONSEMI , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT
North American Technical Support:
Voice Mail: 1 800−282−9855 Toll Free USA/Canada
Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:
Phone: 00421 33 790 2910
For additional information, please contact your local Sales Representative

◊