



光谱图

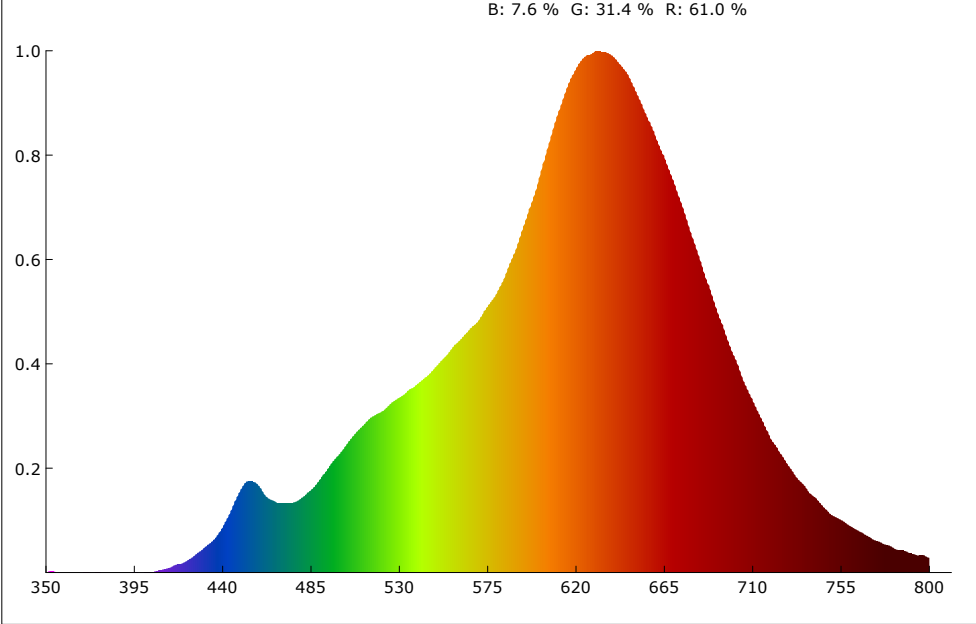

SDCM

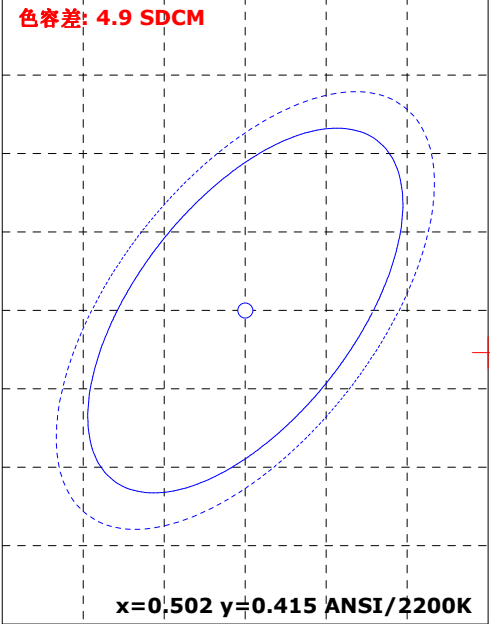

颜色参数:

坐标x: 0.4925 坐标y: 0.4074 坐标u: 0.2854 坐标v: 0.3541 坐标u': 0.2854 坐标v': 0.5311
红色比: 61.0 % 绿色比: 31.4 % 蓝色比: 7.6 % 光通量红色比: 31.1 % 光通量绿色比: 67.6 % 光通量蓝色比: 1.3 %

显色指数: 94.7 AvgR: 93.6
R1: 97.5 R2: 96.9 R3: 98.1 R4: 96.0 R5: 95.3 R6: 90.0 R7: 93.1 R8: 91.1
R9: 84.0 R10: 93.9 R11: 90.3 R12: 85.1 R13: 96.6 R14: 98.9 R15: 97.5


色温: 2278 K 光通量: 11717.727 lm 峰值波长: 630.5 nm 色容差: 4.9
明暗视觉比: 1.1 中心波长: 632.9 nm 主波长: 587.5 nm 质心波长: 617.1 nm
半宽度: 117.7 nm 色偏差: -0.00251 色纯度: 70.1 % 色质指数: 83.8
LER(TM-30): 241.8 辐射功率: 48457.3 mw 色域指数(Rg): 102.8 逼真度(Rf): 94.0
红光辐射功率: 26573.6 mw 近红辐射功率: 4630.5 mw 远红辐射功率: 267.7 mw

电参数:





光效: 31.6 Lm/W 能效: 34.5 能效等级: G
电压: 220.9 V 电流: 1.696 A 功率: 370.300 W 功率因素: 0.988

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/16/14
备注:


Rf: 94.0 CCT: 2278K u': 0.2854
Rg: 102.8 LER: 241.8 Duv: -0.00251 v': 0.5311

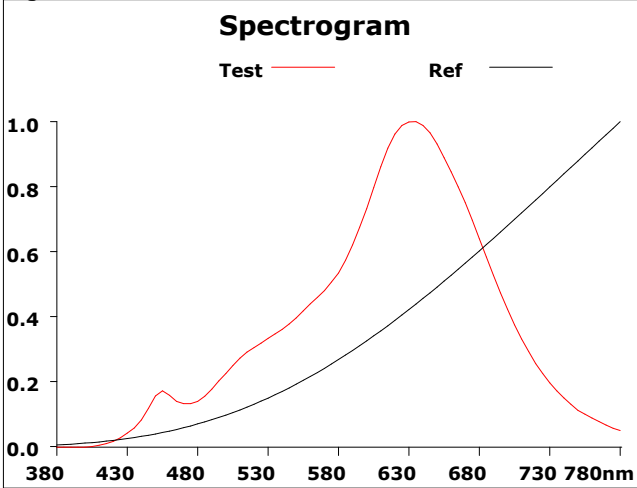


500			
Hue Bin	Rf	Chroma	Hue
1	95.3	-1.8%	0.6%
2	96.2	-0.2%	1.2%
3	93.3	1.4%	1.7%
4	96.3	0.9%	-0.6%
5	96.0	1.9%	1.0%
6	92.8	4.1%	1.6%
7	95.8	1.7%	-1.1%
8	93.8	3.5%	-1.3%
9	95.9	1.8%	-0.4%
10	96.1	1.6%	-1.1%
11	94.3	3.3%	-1.4%
12	91.2	2.9%	-4.5%
13	87.2	3.0%	-10.9%
14	83.4	1.2%	-11.7%
15	94.6	-0.8%	-3.0%
16	90.8	-1.9%	-5.5%

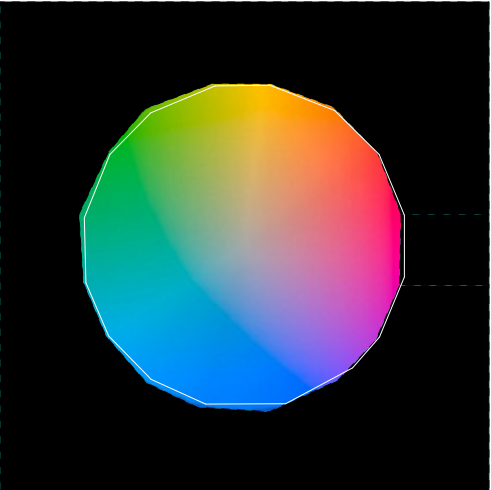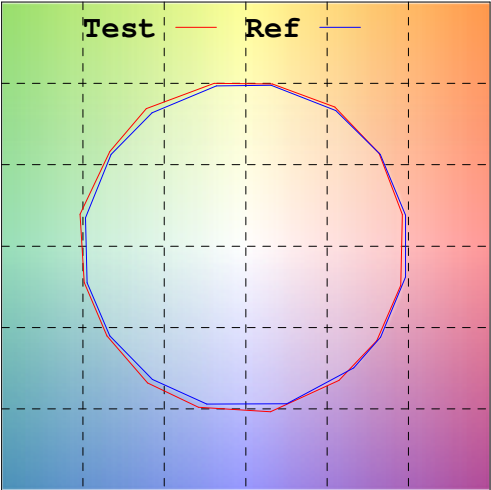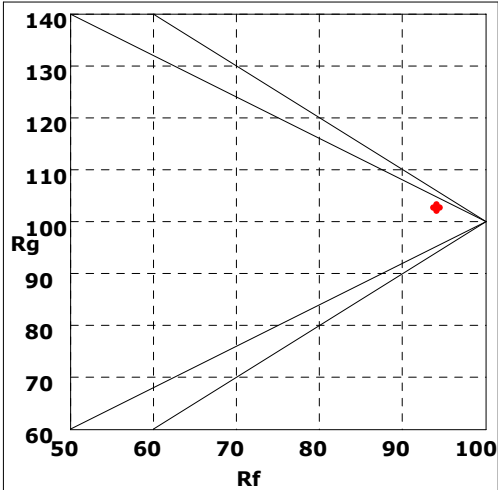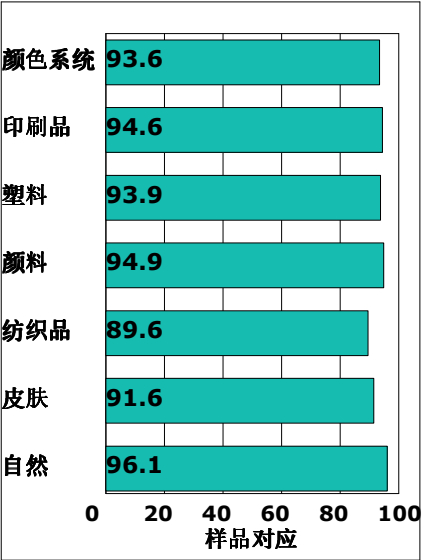

Rf by Bue

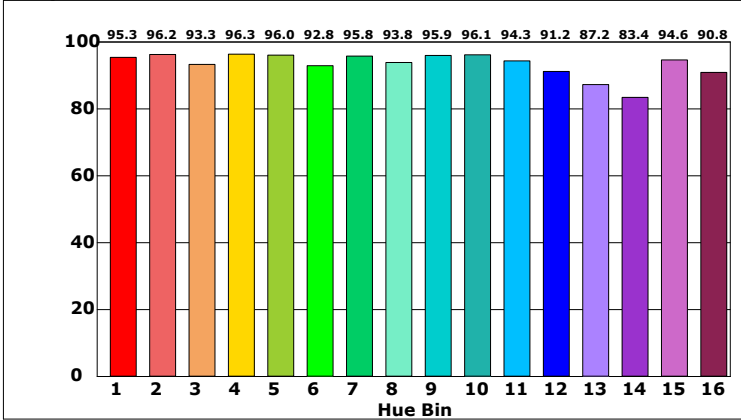

Chroma by Bue

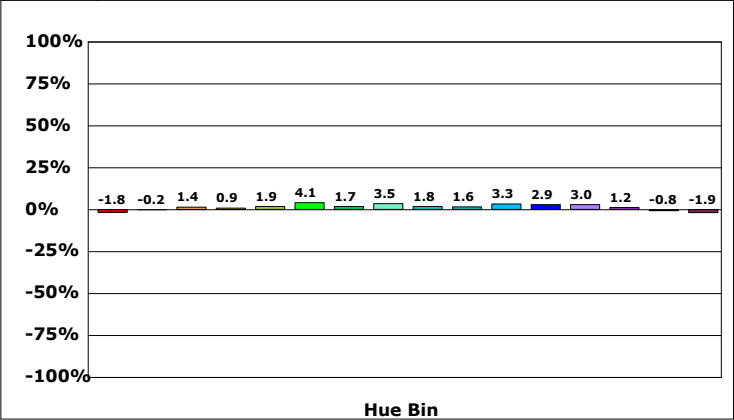

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:07/16/14

