



光谱图

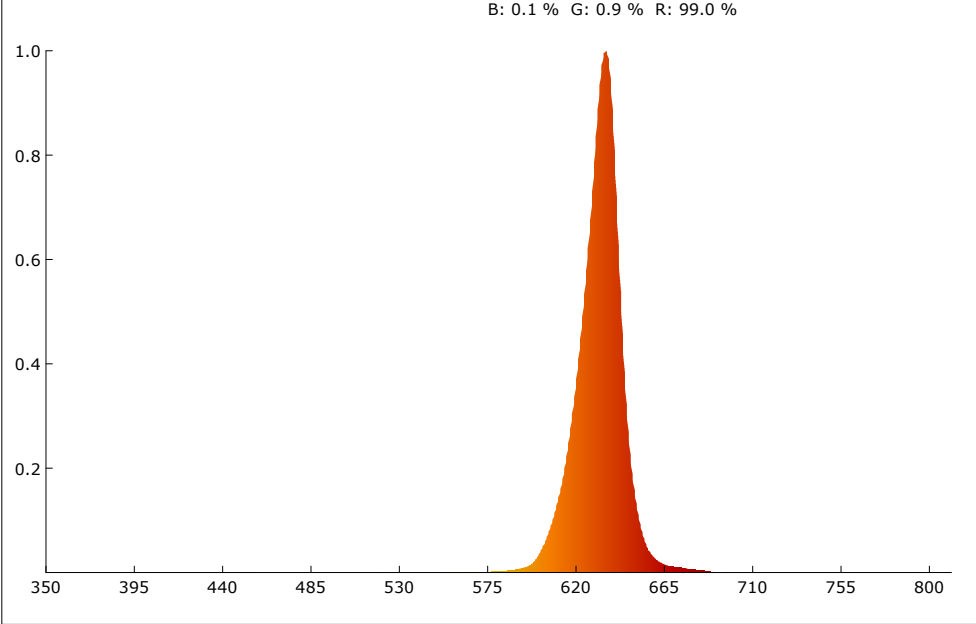

SDCM

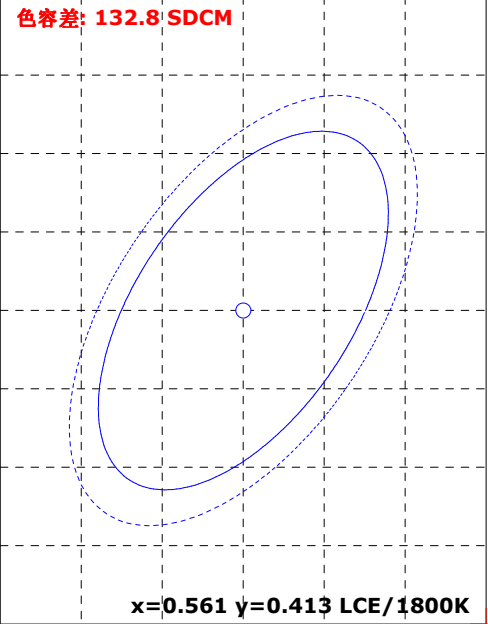

颜色参数:

坐标x: 0.6989	坐标y: 0.2996	坐标u: 0.5379	坐标v: 0.3459	坐标u': 0.5379	坐标v': 0.5188
红色比: 99.0 %	绿色比: 0.9 %	蓝色比: 0.1 %	光通量红色比: 96.9 %	光通量绿色比: 3.1 %	光通量蓝色比: 0.0 %

显色指数: 18.7	AvgR: 17.3						
R1: 7.7	R2: 77.0	R3: 37.9	R4: -15.2	R5: 11.4	R6: 94.0	R7: 4.9	R8: -68.0
R9: -99.0	R10: 70.9	R11: 0.1	R12: 77.3	R13: 30.3	R14: 63.8	R15: -33.1	


色温: 1000 K	光通量: 122.282 lm	峰值波长: 635.5 nm	色容差: 132.8
明暗视觉比: 0.1	中心波长: 633.7 nm	主波长: 624.9 nm	质心波长: 632.3 nm
半宽度: 19.0 nm	色偏差: -0.00470	色纯度: 99.6 %	色质指数: -nan(ind)
LER(TM-30): 173.9	辐射功率: 703.2 mw	色域指数(Rg): 50.9	逼真度(Rf): 15.3
红光辐射功率: 696.1 mw	近红辐射功率: 0.0 mw	远红辐射功率: 0.0 mw	

电参数:





光效: 7.1 Lm/W	能效: 7.8	能效等级: G	
电压: 220.9 V	电流: 0.145 A	功率: 17.140 W	功率因素: 0.534

产品型号:	制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号:	测试单位:
测试人员:	测试日期:03/31/13
备注:	


Rf: 15.3 CCT: 1000K u': 0.5379
Rg: 50.9 LER: 173.9 Duv: -0.0070 v': 0.5188

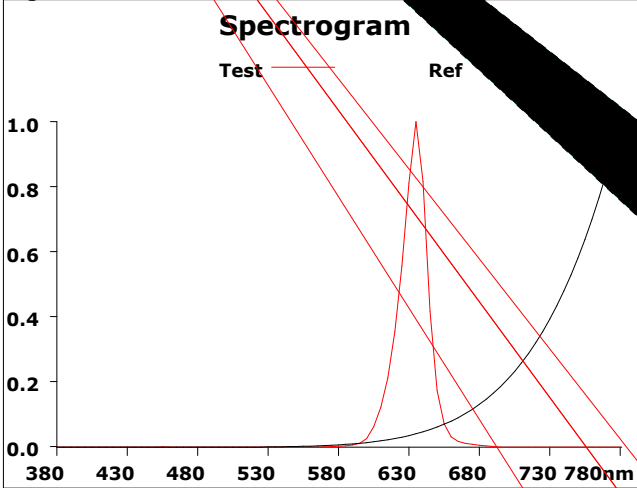


500			
Hue Bin	Rf	Chroma	Hue
1	5.0	-69.2%	25.3%
2	53.2	-52.6%	53.5%
3	74.9	-10.7%	66.8%
4	100.0	nan%	-nan(ind)%
5	98.4	2.4%	5.5%
6	100.0	nan%	-nan(ind)%
7	68.5	-15.7%	-7.8%
8	8.3	-52.3%	-16.0%
9		-55.3%	15.7%
10		-56.0%	38.6%
11		-51.5%	47.5%
12	63.4	-51.2%	-64.6%
13	49.1	-48.0%	
14	54.4	-51.1%	
15	65.5	-48.0%	
16	4.9	-55.3%	

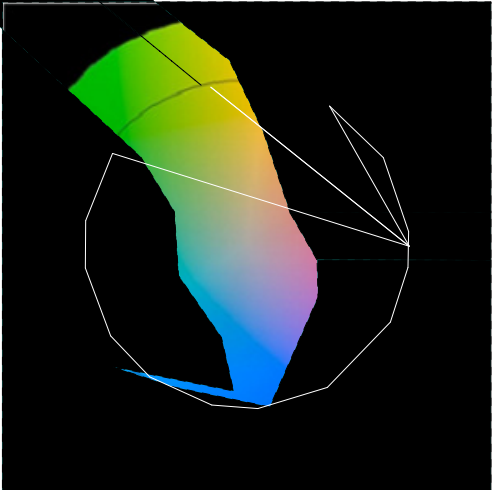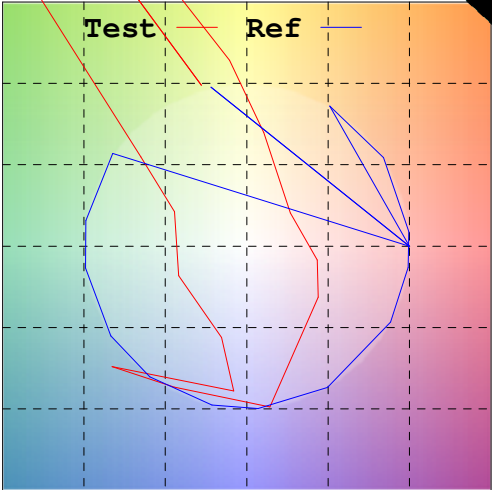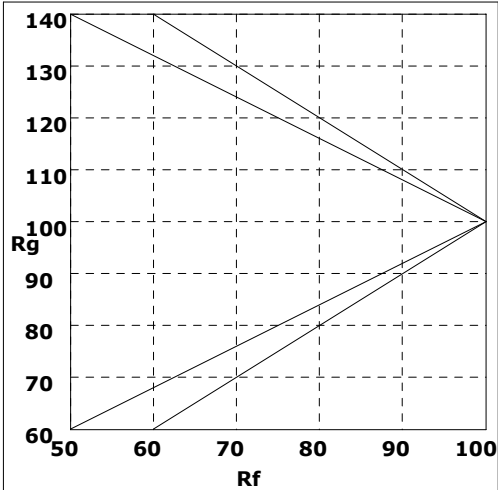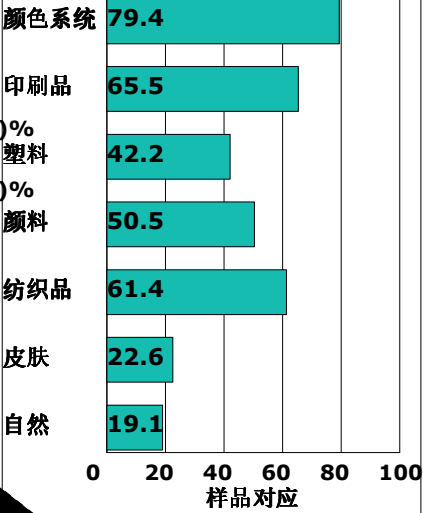

Rf by Bue

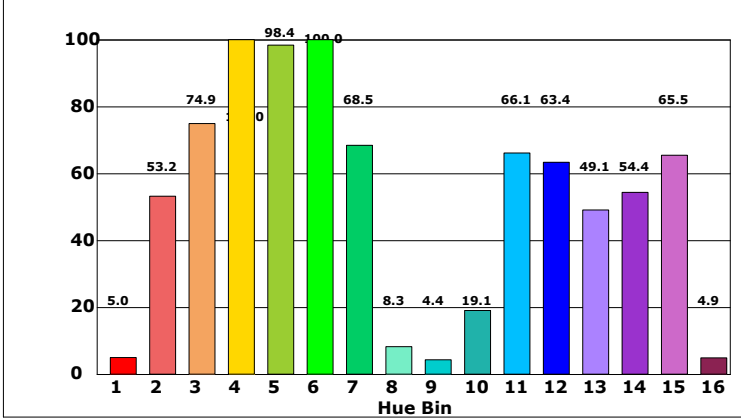

Chroma by Bue

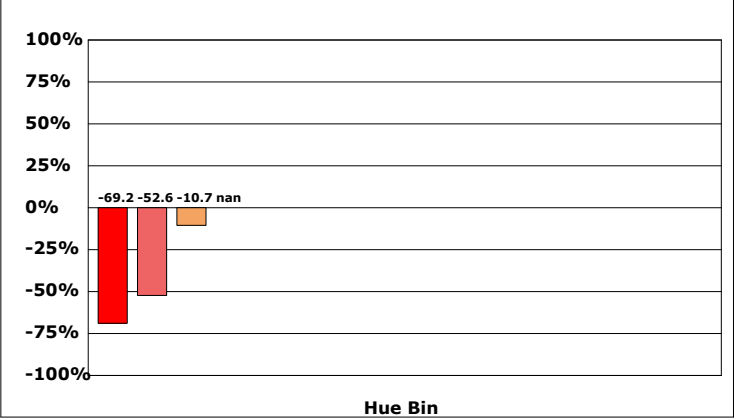

ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173