



光谱图

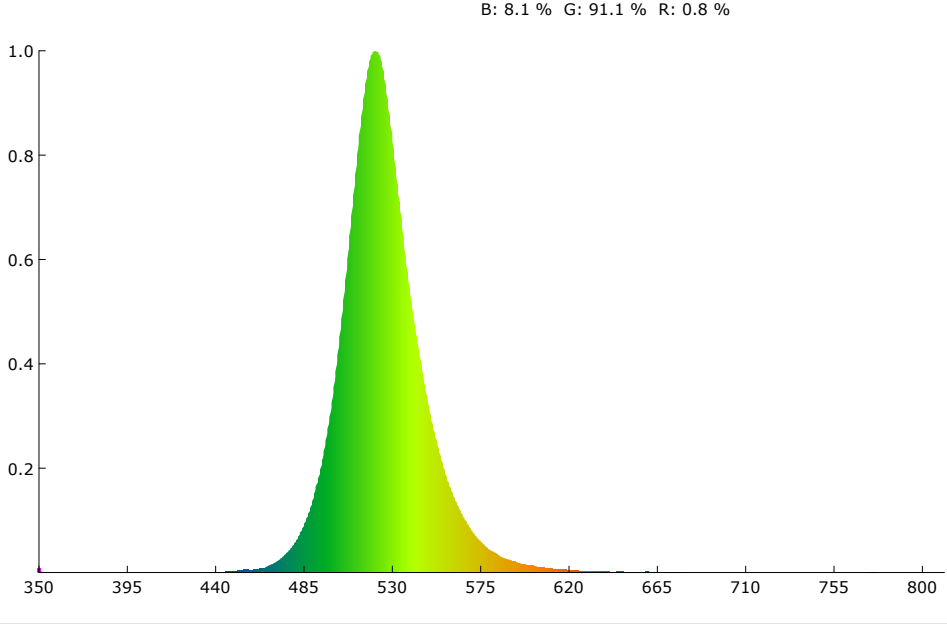

SDCM

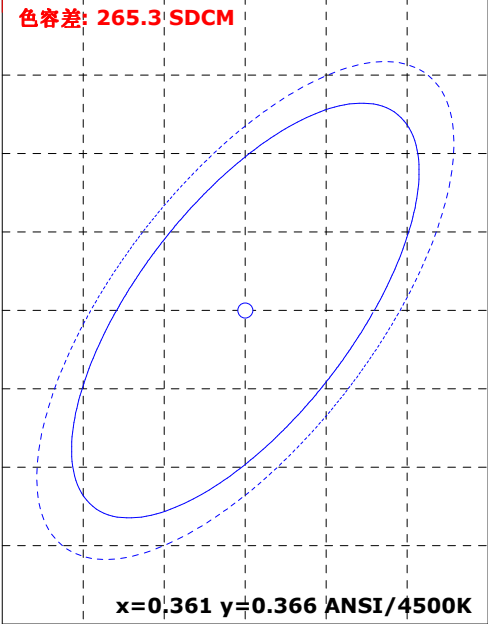

颜色参数:

坐标x: 0.1801 坐标y: 0.7094 坐标u: 0.0646 坐标v: 0.3817 坐标u': 0.0646 坐标v': 0.5725
红色比: 0.8 % 绿色比: 91.1 % 蓝色比: 8.1 % 光通量红色比: 0.4 % 光通量绿色比: 98.9 % 光通量蓝色比: 0.7 %

显色指数: -17.5 AvgR: -30.8
R1: -32.1 R2: -2.2 R3: -9.7 R4: -59.8 R5: -8.5 R6: -6.3 R7: 5.0 R8: -26.7
R9: -99.0 R10: -90.6 R11: -87.1 R12: -20.8 R13: -36.7 R14: 45.0 R15: -31.8


色温: 7737 K 光通量: 315.817 lm 峰值波长: 521.6 nm 色容差: 265.3
明暗视觉比: 2.7 中心波长: 522.8 nm 主波长: 527.8 nm 质心波长: 526.1 nm
半宽度: 35.4 nm 色偏差: 0.15277 色纯度: 78.0 % 色质指数: 0.6
LER(TM-30): 487.8 辐射功率: 647.4 mw 色域指数(Rg): 11.6 逼真度(Rf): 1.7
红光辐射功率: 5.2 mw 近红辐射功率: 0.1 mw 远红辐射功率: 0.0 mw

电参数:





光效: 14.9 lm/W 能效: 16.2 能效等级: G
电压: 220.8 V 电流: 0.175 A 功率: 21.200 W 功率因素: 0.545

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/31/13
备注:

Rf: 1.7 CCT: 7737K u': 0.0646
Rg: 11.6 LER: 487.8 Duv: 0.15277 v': 0.5725

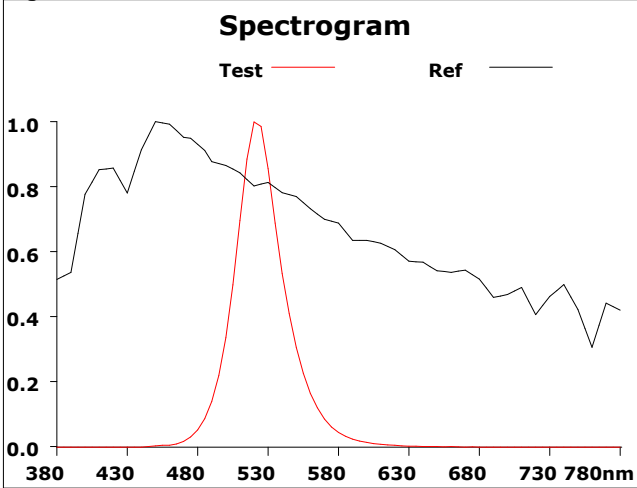

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-80.8%	-0.9%
2	0.0	-66.9%	4.2%
3	0.5	-70.7%	-1.5%
4	5.8	-54.7%	-6.8%
5	2.2	-68.6%	-1.7%
6	1.2	-75.2%	-0.6%
7	0.9	-70.0%	5.1%
8	0.0	-75.1%	9.3%
9	17.5	-61.0%	31.3%
10	15.9	-46.1%	22.2%
11	14.1	-39.1%	8.0%
12	33.2	-38.8%	-18.6%
13	27.7	-48.0%	-25.2%
14	0.4	-59.4%	-40.3%
15	3.9	-73.3%	-50.9%
16	0.0	-75.5%	-20.0%

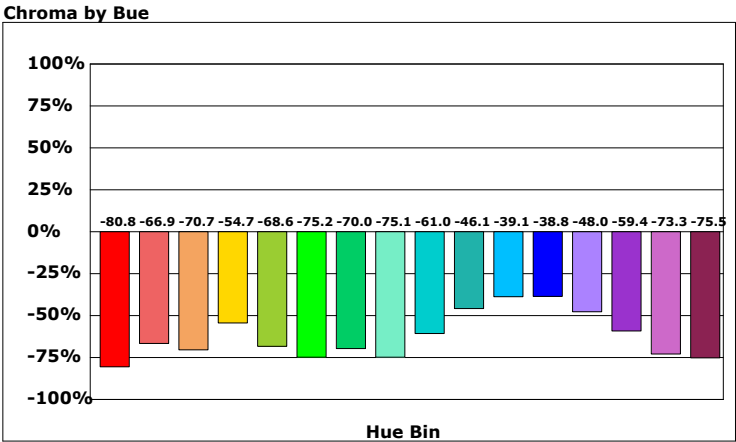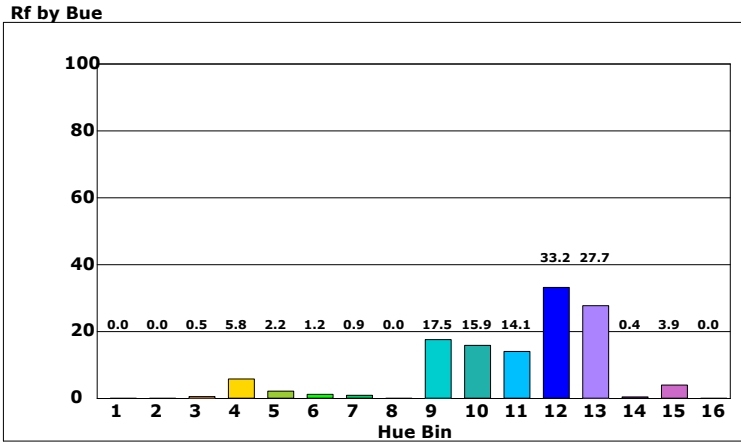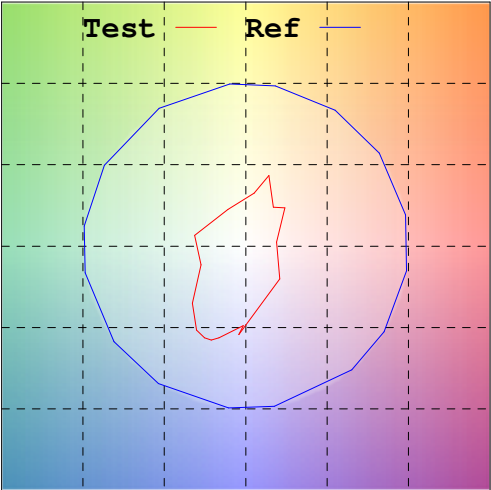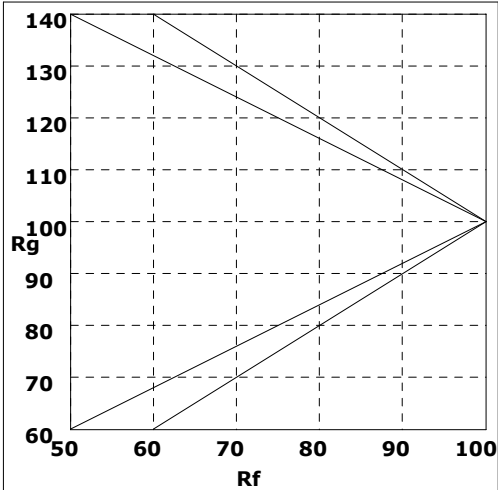

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:03/31/13

