



光谱图

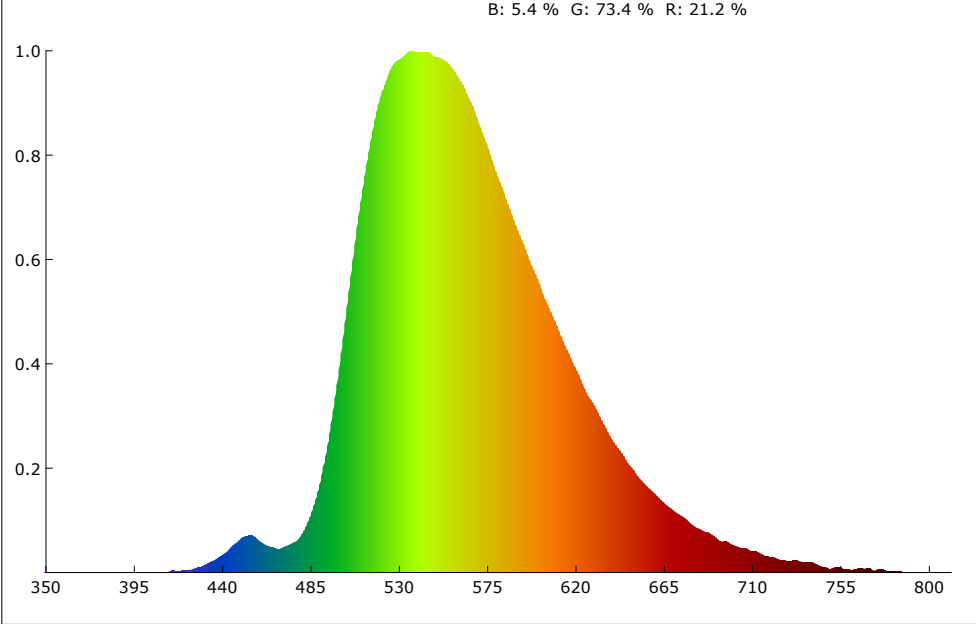

SDCM

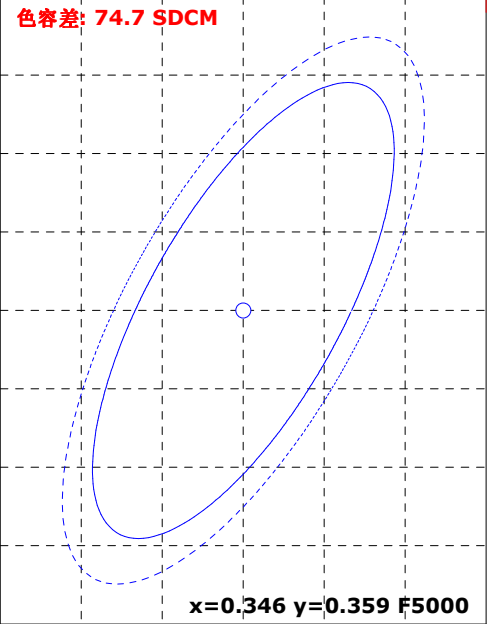

颜色参数:

坐标x: 0.3872 坐标y: 0.5526 坐标u: 0.1749 坐标v: 0.3744 坐标u': 0.1749 坐标v': 0.5616
红色比: 21.2 % 绿色比: 73.4 % 蓝色比: 5.4 % 光通量红色比: 9.0 % 光通量绿色比: 90.5 % 光通量蓝色比: 0.5 %

显色指数: 44.2 AvgR: 28.5
R1: 36.7 R2: 53.6 R3: 64.2 R4: 23.6 R5: 38.0 R6: 49.4 R7: 64.3 R8: 24.1
R9: -99.0 R10: 8.0 R11: 8.1 R12: 15.4 R13: 38.3 R14: 82.9 R15: 20.5


色温: 4601 K 光通量: 466.568 lm 峰值波长: 536.5 nm 色容差: 74.7
明暗视觉比: 1.5 中心波长: 555.3 nm 主波长: 563.6 nm 质心波长: 565.3 nm
半宽度: 103.5 nm 色偏差: 0.06247 色纯度: 82.4 % 色质指数: 42.5
LER(TM-30): 464.2 辐射功率: 1005.2 mw 色域指数(Rg): 55.1 逼真度(Rf): 49.5
红光辐射功率: 210.2 mw 近红辐射功率: 14.4 mw 远红辐射功率: 0.3 mw

电参数:







光效: 22.0 Lm/W 能效: 24.0 能效等级: G
电压: 220.8 V 电流: 0.175 A 功率: 21.190 W 功率因素: 0.545

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/31/13
备注:

Rf: 49.5 CCT: 4601K u': 0.1749
Rg: 55.1 LER: 464.2 Duv: 0.06247 v': 0.5616

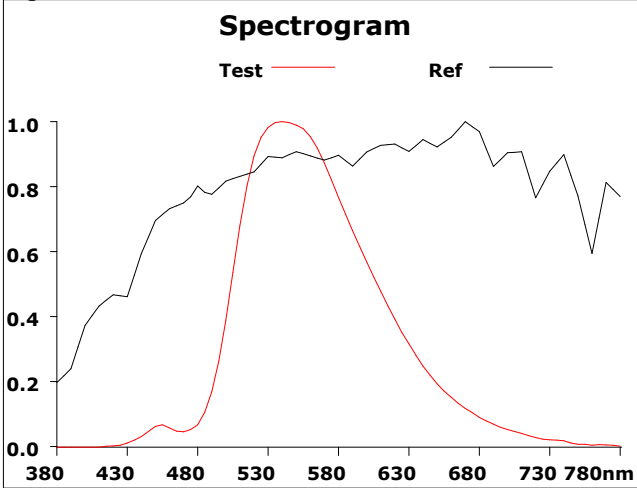

500			
Hue Bin	Rf	Chroma	Hue
1	38.4	-28.8%	0.9%
2	54.3	-24.0%	-3.9%
3	39.2	-28.7%	-5.1%
4	43.6	-31.6%	-5.8%
5	46.4	-39.0%	2.7%
6	35.8	-39.6%	10.2%
7	33.0	-35.1%	20.7%
8	40.4	-27.8%	17.7%
9	52.7	-21.7%	23.0%
10	52.0	-15.9%	24.0%
11	69.9	-11.8%	11.0%
12	71.3	-13.6%	0.3%
13	68.8	-15.7%	-13.5%
14	56.9	-18.3%	-10.3%
15	57.0	-21.9%	-15.8%
16	45.0	-25.7%	-4.4%

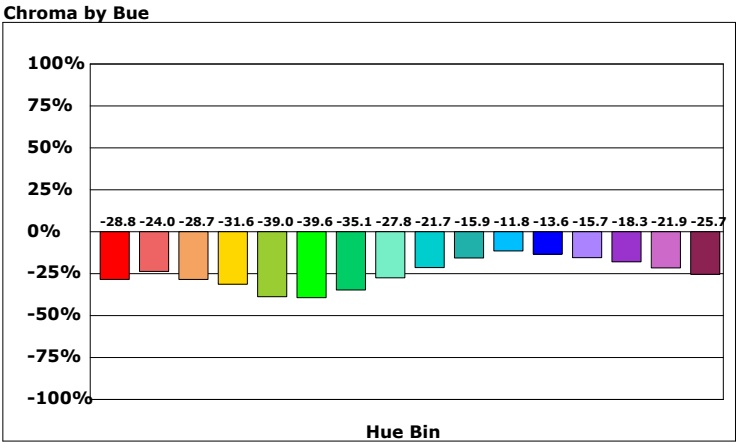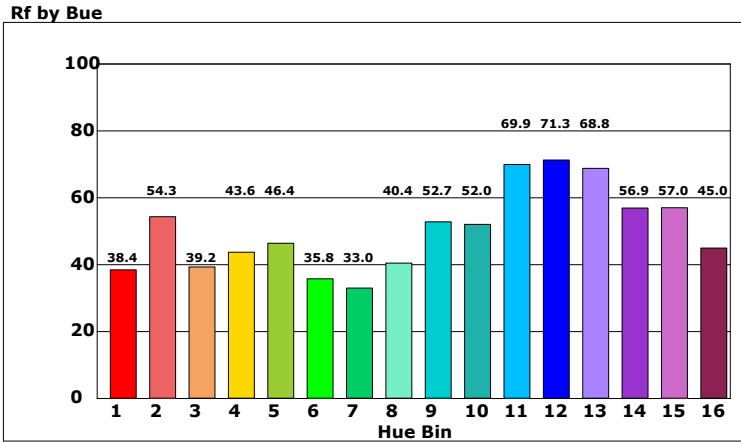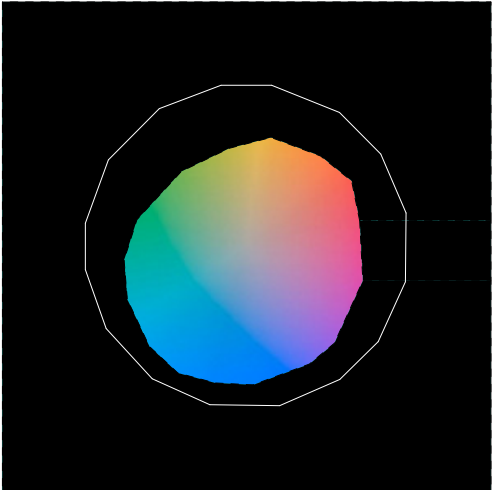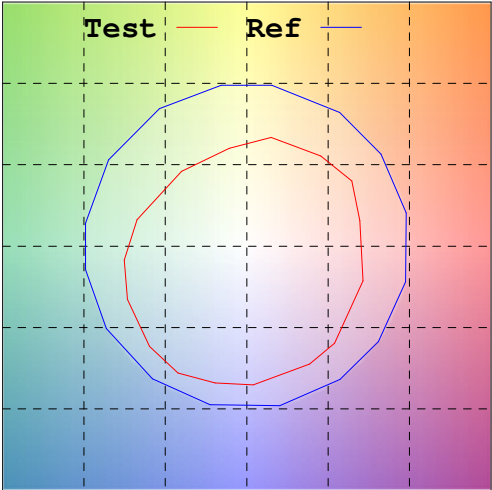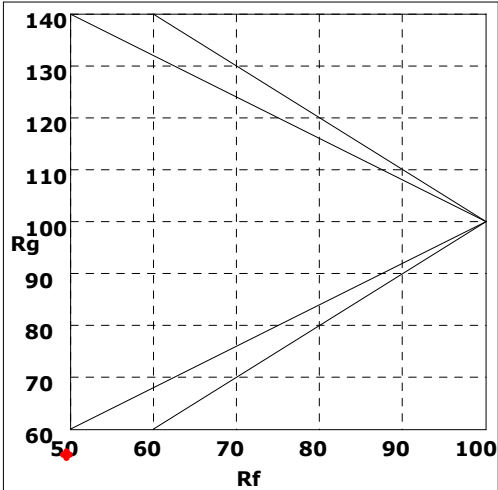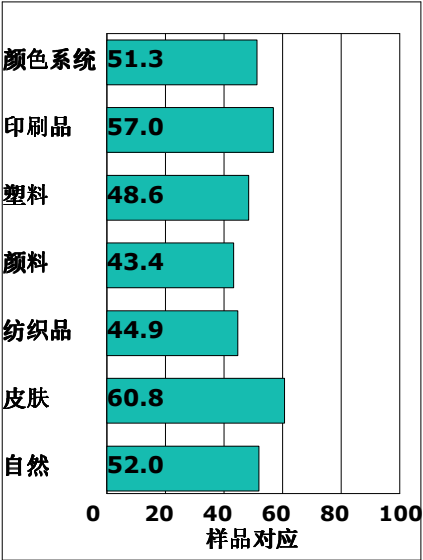

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:03/31/13

