


光谱图

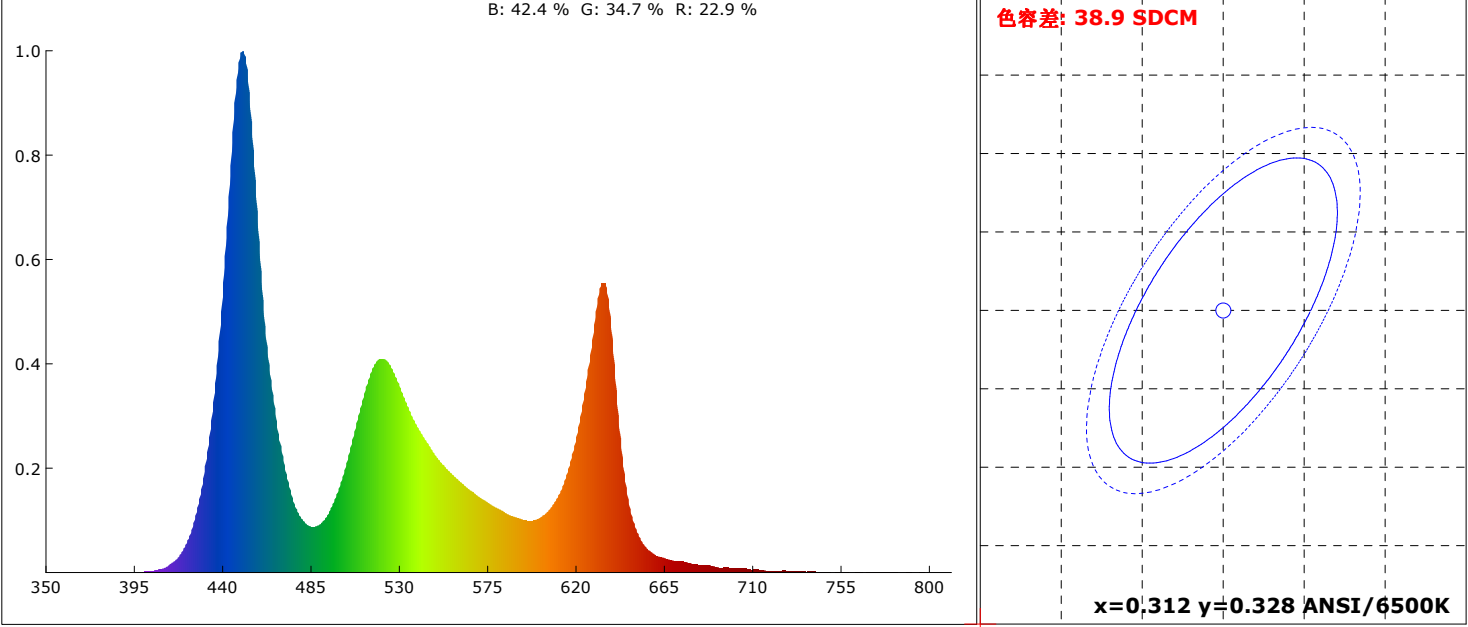

颜色参数:

坐标x: 0.2661 坐标y: 0.2561 坐标u: 0.1921 坐标v: 0.2773 坐标u': 0.1921 坐标v': 0.4160
红色比: 22.9 % 绿色比: 34.7 % 蓝色比: 42.4 % 光通量红色比: 16.8 % 光通量绿色比: 77.6 % 光通量蓝色比: 5.6 %

显色指数: 72.2 AvgR: 61.2
R1: 69.5 R2: 94.8 R3: 62.2 R4: 61.1 R5: 80.5 R6: 92.8 R7: 75.3 R8: 41.5
R9: -72.0 R10: 89.4 R11: 50.9 R12: 63.8 R13: 77.2 R14: 76.8 R15: 54.2


色温: 17040 K 光通量: 453.210 lm 峰值波长: 450.6 nm 色容差: 38.9
明暗视觉比: 3.0 中心波长: 450.8 nm 主波长: 474.0 nm 质心波长: 525.1 nm
半宽度: 21.6 nm 色偏差: -0.00775 色纯度: 30.5 % 色质指数: 89.4
LER(TM-30): 246.6 辐射功率: 1837.7 mw 色域指数(Rg): 114.5 逼真度(Rf): 74.7
红光辐射功率: 419.6 mw 近红辐射功率: 6.8 mw 远红辐射功率: 0.4 mw

电参数:







光效: 13.6 Lm/W 能效: 14.8 能效等级: G
电压: 220.8 V 电流: 0.264 A 功率: 33.300 W 功率因素: 0.570

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/31/13
备注:

Rf: 74.7 CCT: 17040K u': 0.1921
Rg: 114.5 LER: 246.6 Duv: -0.00775 v': 0.4160

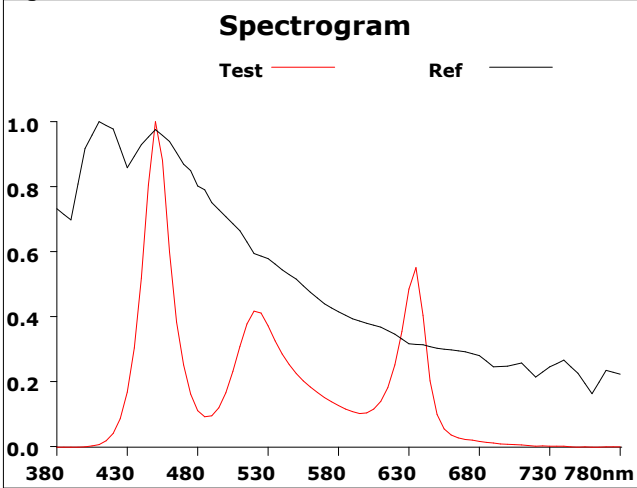

500			
Hue Bin	Rf	Chroma	Hue
1	59.4	20.8%	0.4%
2	75.2	9.5%	-6.8%
3	81.2	6.4%	-7.9%
4	84.8	2.6%	0.9%
5	81.5	-0.2%	3.4%
6	78.4	8.7%	8.7%
7	72.5	-2.1%	2.9%
8	84.0	5.3%	3.8%
9	87.4	-0.3%	5.7%
10	80.1	-2.5%	15.1%
11	59.3	0.6%	18.8%
12	70.7	0.0%	23.6%
13	62.0	2.0%	22.9%
14	56.4	9.6%	25.2%
15	56.4	30.0%	22.6%
16	66.1	14.5%	5.5%

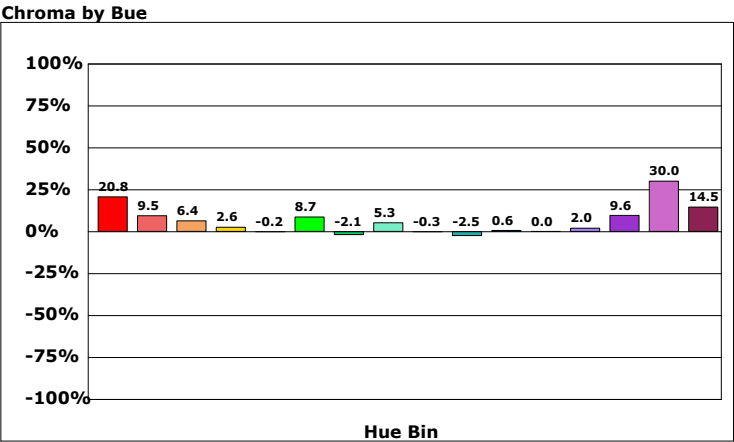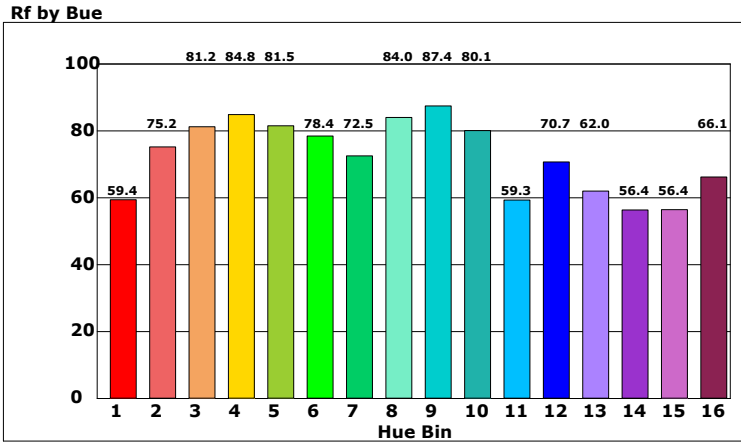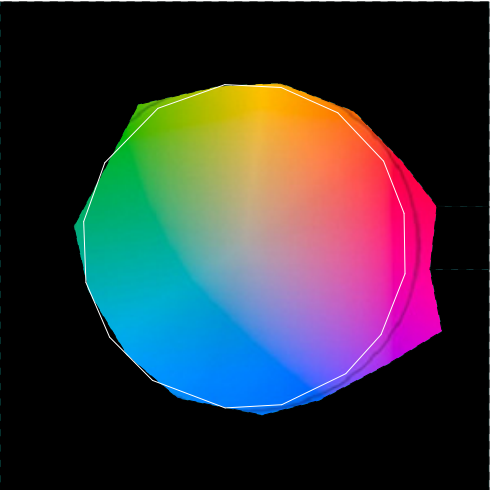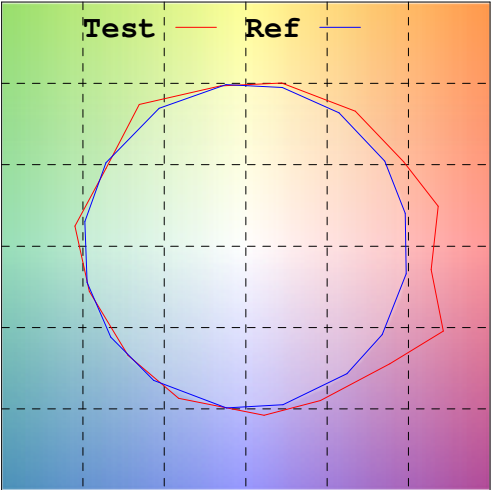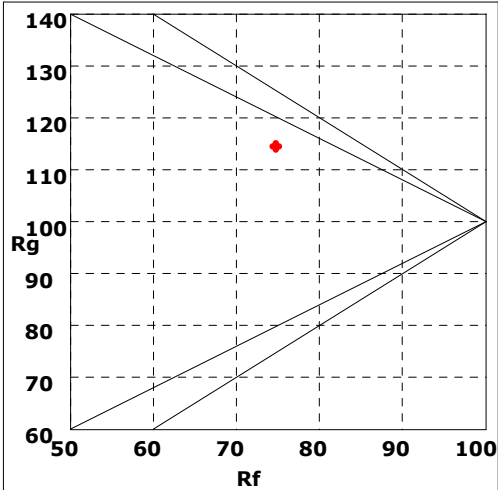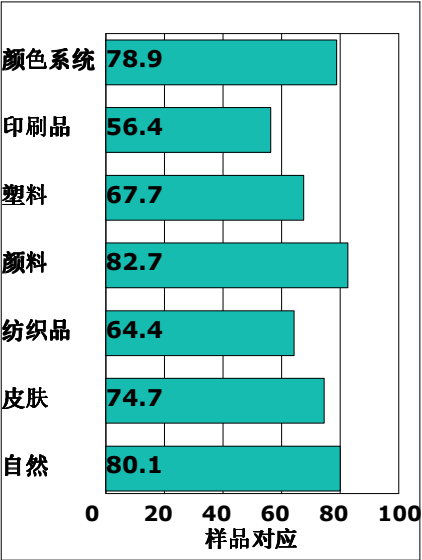

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:03/31/13

