



光谱图

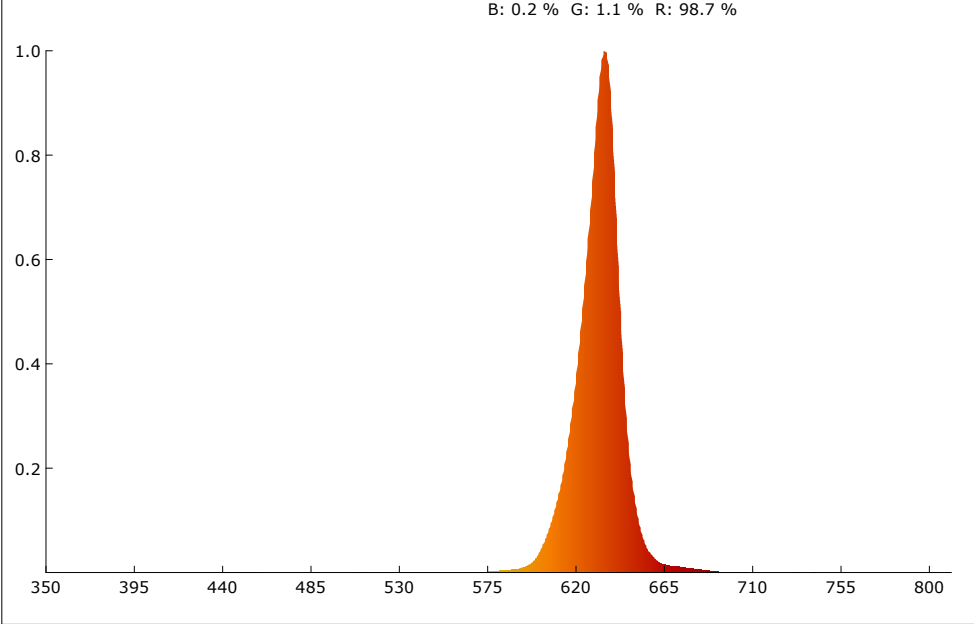

SDCM

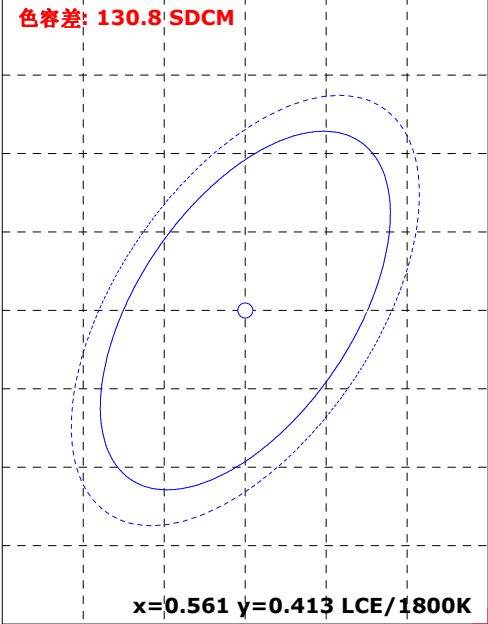

颜色参数:

坐标x: 0.6963 坐标y: 0.3005 坐标u: 0.5342 坐标v: 0.3458 坐标u': 0.5342 坐标v': 0.5187
红色比: 98.7 % 绿色比: 1.1 % 蓝色比: 0.2 % 光通量红色比: 96.2 % 光通量绿色比: 3.7 % 光通量蓝色比: 0.0 %

显色指数: 23.6 AvgR: 21.7
R1: 14.7 R2: 80.6 R3: 39.8 R4: -7.9 R5: 17.5 R6: 94.8 R7: 9.5 R8: -59.4
R9: -99.0 R10: 76.1 R11: 9.5 R12: 72.8 R13: 36.9 R14: 65.4 R15: -25.3


色温: 1000 K 光通量: 136.043 lm 峰值波长: 635.5 nm 色容差: 130.8
明暗视觉比: 0.1 中心波长: 633.3 nm 主波长: 624.5 nm 质心波长: 631.9 nm
半宽度: 19.2 nm 色偏差: 0.15575 色纯度: 99.1 % 色质指数: -nan(ind)
LER(TM-30): 176.3 辐射功率: 771.5 mw 色域指数(Rg): 82.9 逼真度(Rf): 12.7
红光辐射功率: 760.3 mw 近红辐射功率: 0.7 mw 远红辐射功率: 0.1 mw

电参数:






光效: 8.0 Lm/W 能效: 8.7 能效等级: G
电压: 220.9 V 电流: 0.144 A 功率: 17.060 W 功率因素: 0.535

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/31/13
备注:

Rf: 12.7 CCT: 1000K u': 0.5342
Rg: 82.9 LER: 176.3 Duv: 0.0000 0.5187

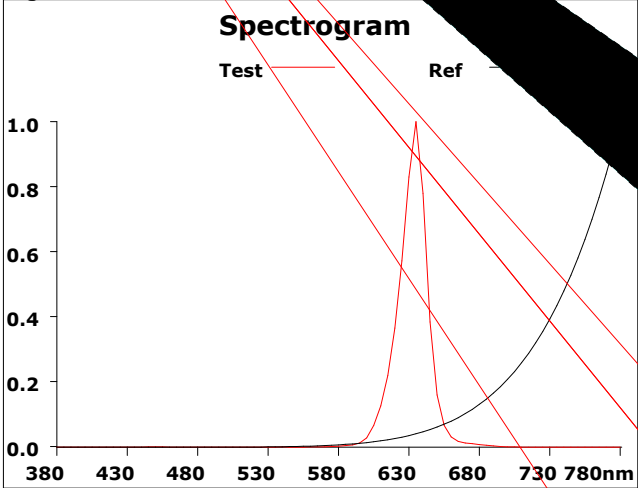

500			
Hue Bin	Rf	Chroma	Hue
1	3.2	-65.6%	41.8%
2	37.3	-28.7%	97.6%
3	58.0	48.5%	114.3%
4	100.0	nan%	-nan(ind)%
5	81.6	68.2%	-1.9%
6	100.0	nan%	-nan(ind)%
7	63.2	44.8%	-31.8%
8	12.1	7.3%	27.7%
9	19.5	55.2%	100.0%
10	60.3	58.0%	180.0%
11	58.0	45.0%	195.0%
12	24.7	18.0%	210.0%
13	45.0	18.0%	225.0%
14	24.7	18.0%	240.0%
15	67.1	-35.4%	255.0%
16	4.2	-55.5%	270.0%

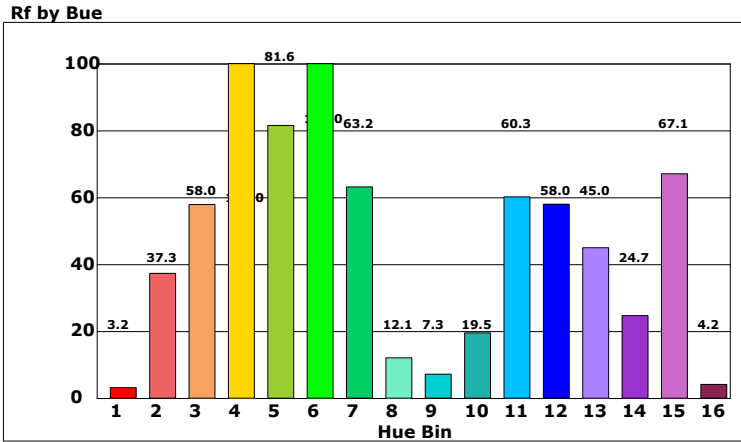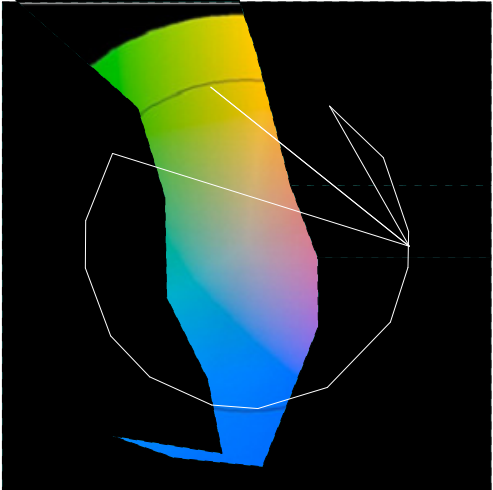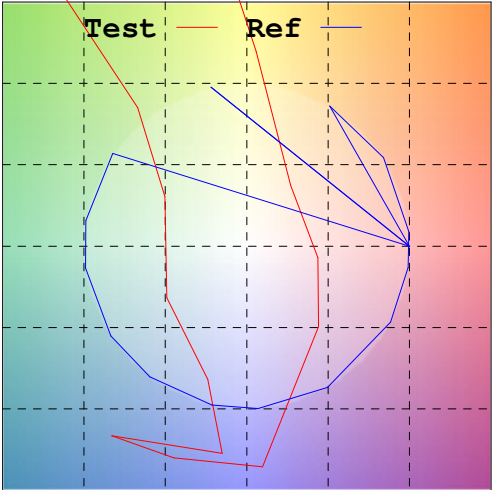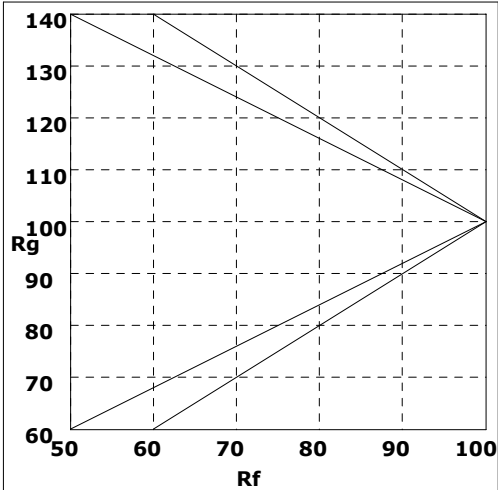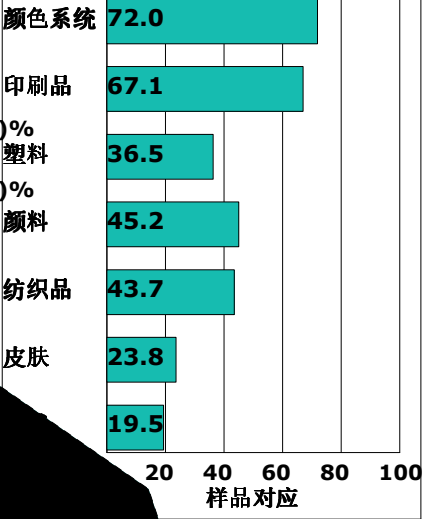

ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173