



光谱图

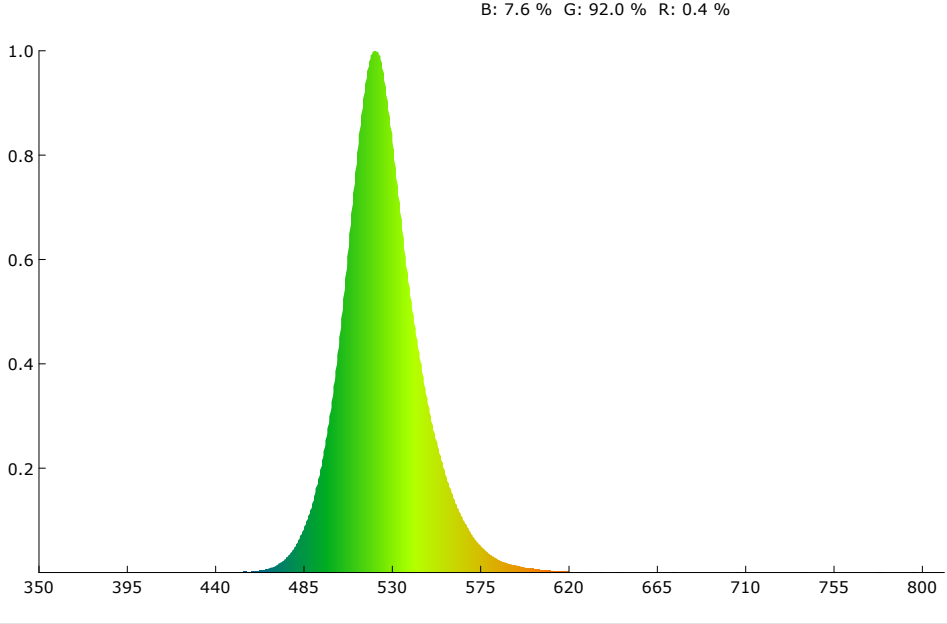

SDCM

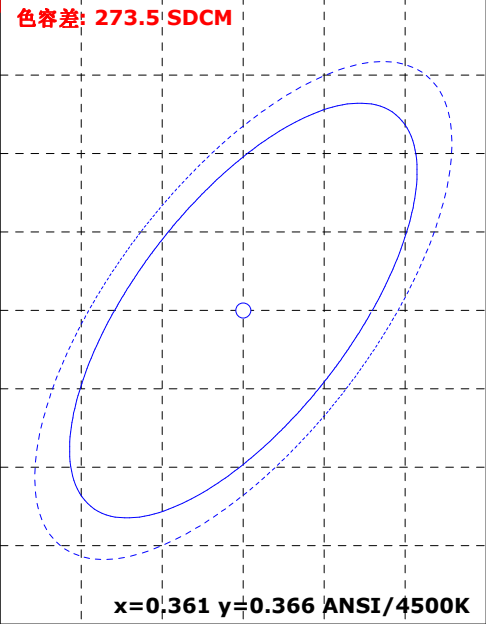

颜色参数:

坐标x: 0.1739 坐标y: 0.7194 坐标u: 0.0616 坐标v: 0.3825 坐标u': 0.0616 坐标v': 0.5738
红色比: 0.4 % 绿色比: 92.0 % 蓝色比: 7.6 % 光通量红色比: 0.2 % 光通量绿色比: 99.2 % 光通量蓝色比: 0.6 %

显色指数: -22.1 AvgR: -35.1
R1: -35.2 R2: -6.0 R3: -16.3 R4: -65.5 R5: -10.7 R6: -10.8 R7: -1.8 R8: -30.9
R9: -99.0 R10: -98.4 R11: -94.1 R12: -25.4 R13: -40.2 R14: 41.9 R15: -33.8


色温: 7805 K 光通量: 325.320 lm 峰值波长: 521.6 nm 色容差: 273.5
明暗视觉比: 2.8 中心波长: 522.8 nm 主波长: 527.4 nm 质心波长: 525.6 nm
半宽度: 35.4 nm 色偏差: 0.15575 色纯度: 79.7 % 色质指数: 0.3
LER(TM-30): 490.6 辐射功率: 663.1 mw 色域指数(Rg): 8.4 逼真度(Rf): 0.9
红光辐射功率: 2.4 mw 近红辐射功率: 0.2 mw 远红辐射功率: 0.1 mw

电参数:




光效: 15.3 Lm/W 能效: 16.7 能效等级: G
电压: 220.8 V 电流: 0.175 A 功率: 21.240 W 功率因素: 0.546

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/31/13
备注:


Rf: 0.9 CCT: 7805K u': 0.0616
Rg: 8.4 LER: 490.6 Duv: 0.15575 v': 0.5738

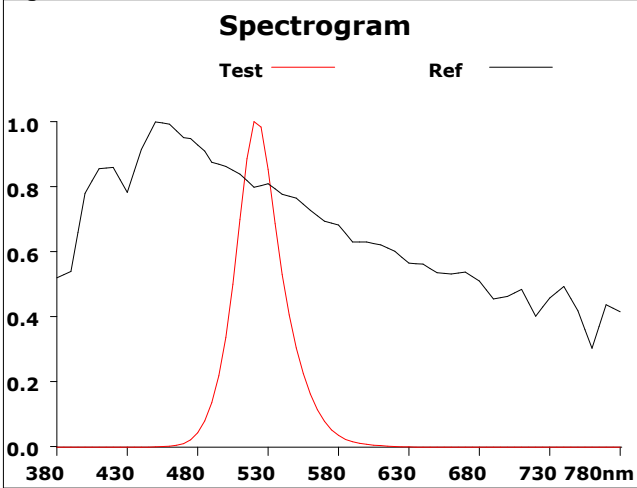

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-85.5%	0.3%
2	0.0	-71.8%	5.8%
3	0.3	-74.5%	-1.3%
4	3.8	-57.6%	-6.9%
5	1.3	-71.8%	-1.4%
6	0.6	-79.8%	0.3%
7	0.4	-74.6%	7.5%
8	0.0	-78.8%	11.2%
9	15.0	-63.5%	32.5%
10	18.3	-46.5%	24.3%
11	4.2	-45.3%	5.9%
12	28.4	-42.4%	-19.2%
13	22.7	-52.7%	-25.3%
14	0.2	-64.8%	-40.6%
15	2.8	-78.4%	-49.6%
16	0.0	-81.6%	-19.4%

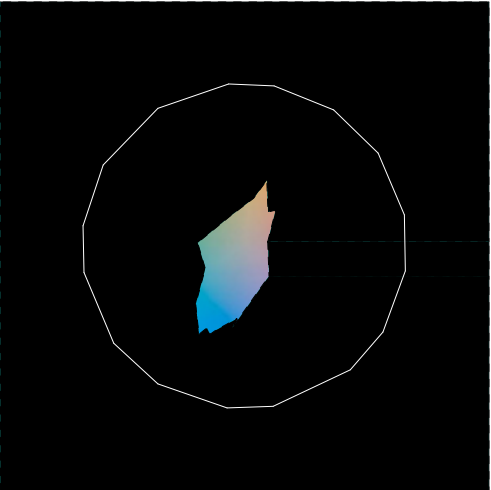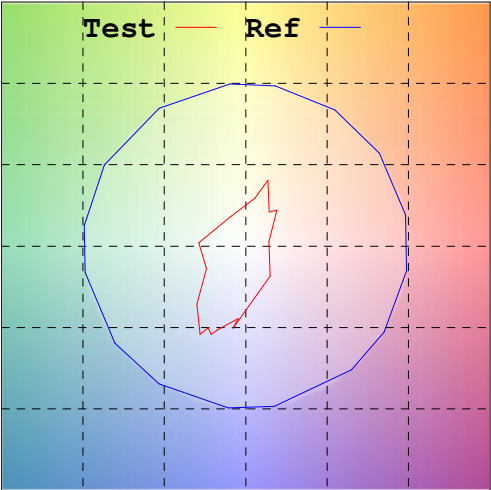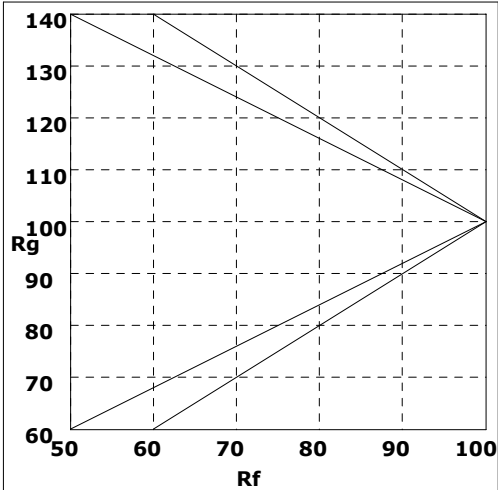

Rf by Bue

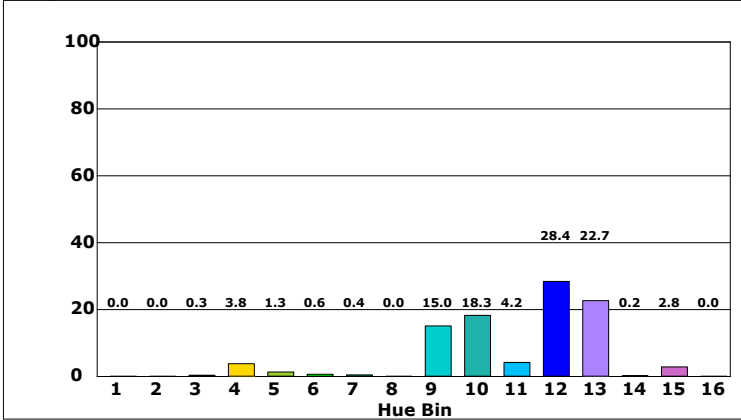

Chroma by Bue

