



光谱图

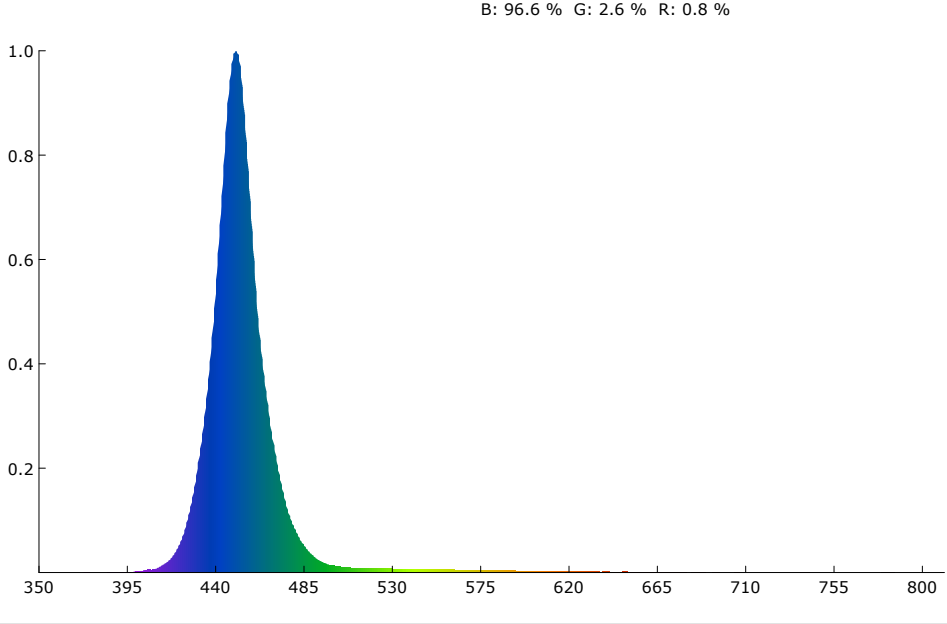

SDCM

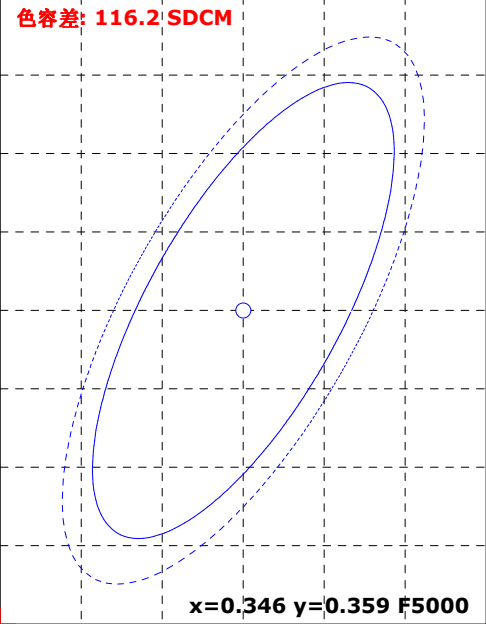

颜色参数:

坐标x: 0.1563 坐标y: 0.0361 坐标u: 0.2003 坐标v: 0.0694 坐标u': 0.2003 坐标v': 0.1041
红色比: 0.8 % 绿色比: 2.6 % 蓝色比: 96.6 % 光通量红色比: 3.1 % 光通量绿色比: 31.5 % 光通量蓝色比: 65.4 %

显色指数: -42.5 AvgR: -42.0
R1: 33.8 R2: -26.6 R3: -99.0 R4: -96.6 R5: 37.1 R6: -27.6 R7: -55.3 R8: -43.2
R9: -99.0 R10: -99.0 R11: -99.0 R12: -83.1 R13: 19.4 R14: -33.9 R15: 42.5


色温: 99999 K 光通量: 79.628 lm 峰值波长: 450.6 nm 色容差: 116.2
明暗视觉比: 16.9 中心波长: 450.8 nm 主波长: 456.3 nm 质心波长: 456.0 nm
半宽度: 21.8 nm 色偏差: 0.06247 色纯度: 96.2 % 色质指数: 0.3
LER(TM-30): 47.3 辐射功率: 1684.0 mw 色域指数(Rg): nan 逼真度(Rf): -nan(ind)
红光辐射功率: 13.4 mw 近红辐射功率: 1.2 mw 远红辐射功率: 0.5 mw

电参数:


光效: 3.9 Lm/W 能效: 4.3 能效等级: G
电压: 220.9 V 电流: 0.168 A 功率: 20.240 W 功率因素: 0.543

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/31/13
备注:

Rf: -nan(ind) CCT: 99999K u': 0.2003
Rg: nan LER: 47.3 Duv: 0.06247 v': 0.1041

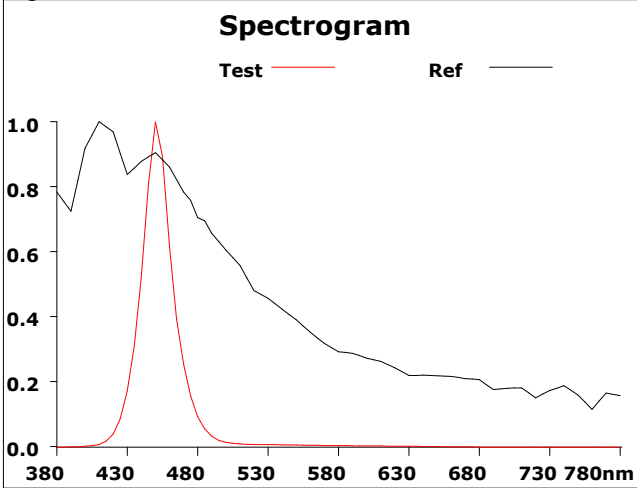

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-205.9%	83.4%
2	0.0	25.4%	-26.8%
3	-nan(ind)	nan%	-nan(ind)%
4	-nan(ind)	nan%	-nan(ind)%
5	-nan(ind)	nan%	-nan(ind)%
6	-nan(ind)	nan%	-nan(ind)%
7	-nan(ind)	nan%	-nan(ind)%
8	-nan(ind)	nan%	-nan(ind)%
9	-nan(ind)	nan%	-nan(ind)%
10	-nan(ind)	nan%	-nan(ind)%
11	0.0	25.5%	-283.1%
12	0.0	-85.3%	-451.5%
13	0.0	-255.9%	-380.3%
14	0.0	-381.5%	-283.9%
15	0.0	-543.5%	-188.1%
16	0.0	-415.2%	16.0%

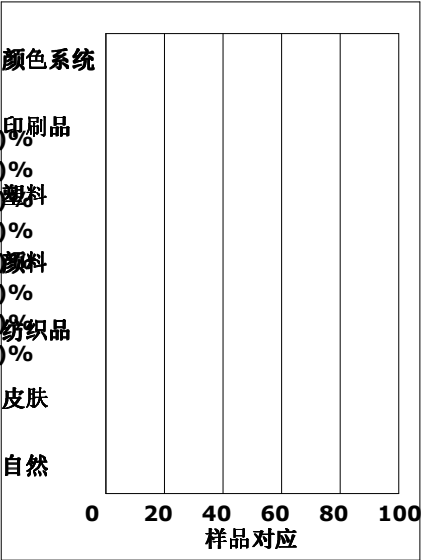

ERROR: rangecheck
OFFENDING COMMAND: roll

STACK:

2
4
-2.14748e+011
-2.14748e+012