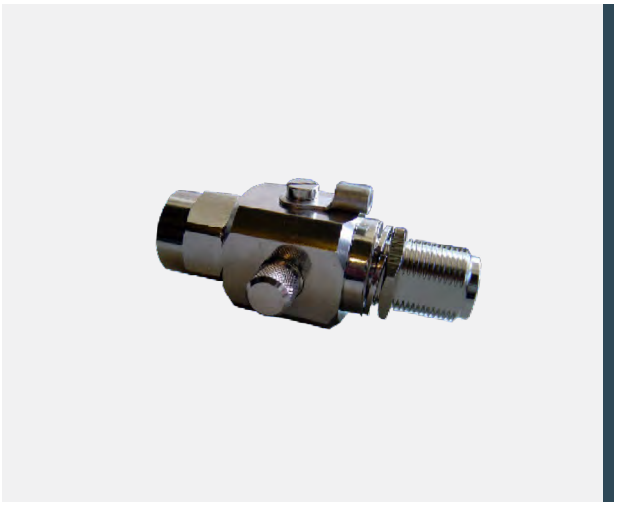


SP3-90-6

Gas Discharge Surge Protectors

GAS DISCHARGE SURGE PROTECTORS

DC to 3000 MHz Operation

The surge protectors offered by Laird Technologies are an integral part of any antenna installation in protecting sensitive equipment from surges caused by lightning. The ultra-fast gas discharge tube design gives quick response to power surges and dumps the excess power safely to the ground. A ground lug terminal is supplied to provide superior grounding. The units have the ability to withstand multiple lightning strikes. The SP3-90-6 passes DC voltage, so it is also suitable for systems that pass DC power through the coax, such as remote amplifiers.

FEATURES RoHS

- Ultra fast gas discharge
- Multiple strike 6 KA discharge
- 0.4 db max insertion loss

APPLICATIONS

- Lightning protection for antenna systems
- 900 MHz to 2.4 GHz antenna systems
- WiMAX

PARAMETER	MIN	TYP	MAX	UNITS
Frequency Range	DC		3000	MHz
Insertion Loss	.1	.2	.4	dB
VSWR		1.2 : 1		
DC Breakdown Voltage	72	90	108	V
Impulse Discharge (5 times, 8/20 µsec)	6000			A
Impedance		50		Ohm
Insulation Resistance (DC 100 V)	50			Meg Ohm
Input Power (@2.4 GHz)			42	W
Operating Temperature	-40		+85	C
Weight		5.8 (164)		oz (g)
Dimensions (includes connectors)		2.75 x 1.25 x 1.75 (70 x 32 x 44)		in (mm)

SYSTEM ORDERING

SP3-90-6-BFF DC to 3000 MHz, 6 KA, bulkhead N female to N female, 90 V surge protector
SP3-90-6-BFM DC to 3000 MHz, 6 KA, bulkhead N female to N male, 90 V surge protector

NOTES:

* All shipments F.O.B. Schaumburg, IL 60173

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

©2021 TE Connectivity. All Rights Reserved.

12/21 Original

Laird™ External Antennas is now part of TE connectivity