



光谱图

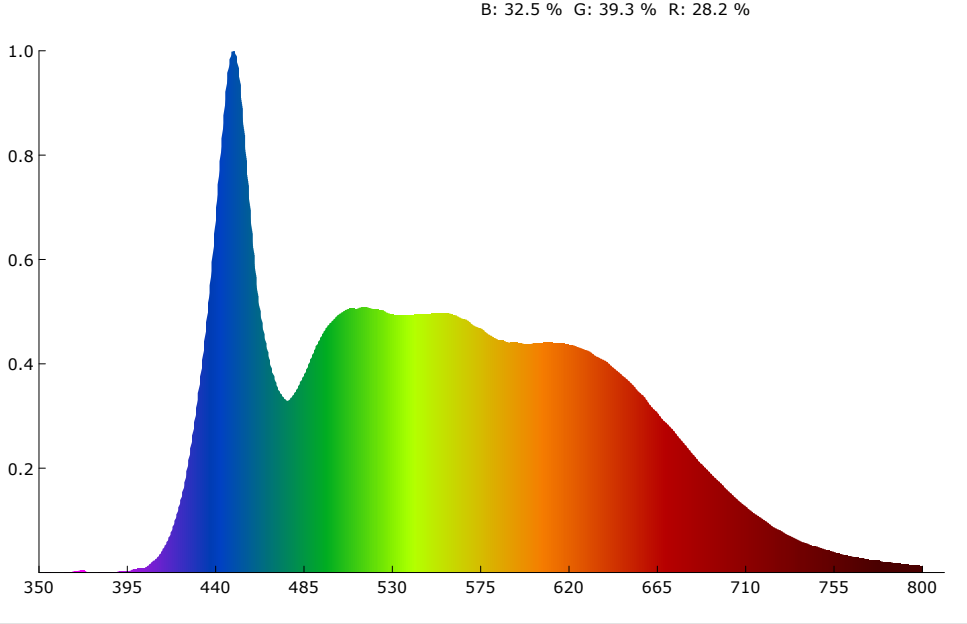

SDCM

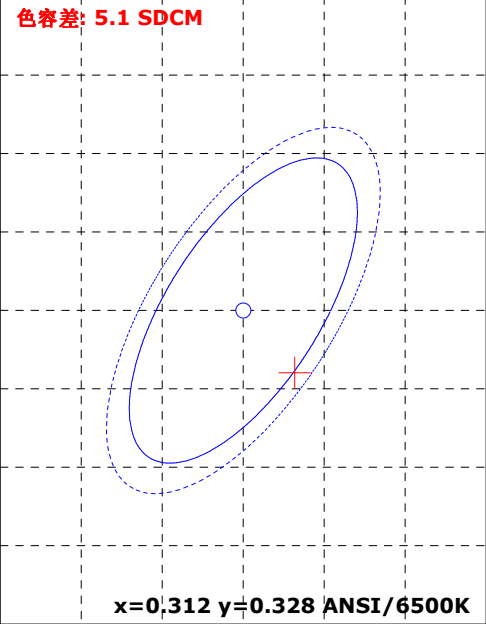

颜色参数:

坐标x: 0.3155 坐标y: 0.3242 坐标u: 0.2016 坐标v: 0.3108 坐标u': 0.2016 坐标v': 0.4662
红色比: 28.2 % 绿色比: 39.3 % 蓝色比: 32.5 % 光通量红色比: 15.3 % 光通量绿色比: 80.4 % 光通量蓝色比: 4.3 %


显色指数: 95.6 AvgR: 94.5
R1: 98.3 R2: 96.7 R3: 93.7 R4: 95.8 R5: 97.3 R6: 92.0 R7: 94.9 R8: 96.1
R9: 92.2 R10: 91.4 R11: 94.7 R12: 80.4 R13: 98.3 R14: 96.5 R15: 99.2

色温: 6384 K 光通量: 2486.579 lm 峰值波长: 449.6 nm 色容差: 5.1
明暗视觉比: 2.3 中心波长: 449.6 nm 主波长: 484.9 nm 质心波长: 554.0 nm
半宽度: 25.9 nm 色偏差: -0.00069 色纯度: 6.7 % 色质指数: 91.3
LER(TM-30): 266.4 辐射功率: 9333.7 mw 色域指数(Rg): 102.2 逼真度(Rf): 92.5
红光辐射功率: 2508.3 mw 近红辐射功率: 399.4 mw 远红辐射功率: 26.0 mw





电参数:

光效: 27.6 Lm/W 能效: 30.0 能效等级: G
电压: 219.0 V 电流: 0.649 A 功率: 90.160 W 功率因素: 0.634


Rf: 92.5 CCT: 6384K u': 0.2016
Rg: 102.2 LER: 266.4 Duv: -0.00069 v': 0.4662

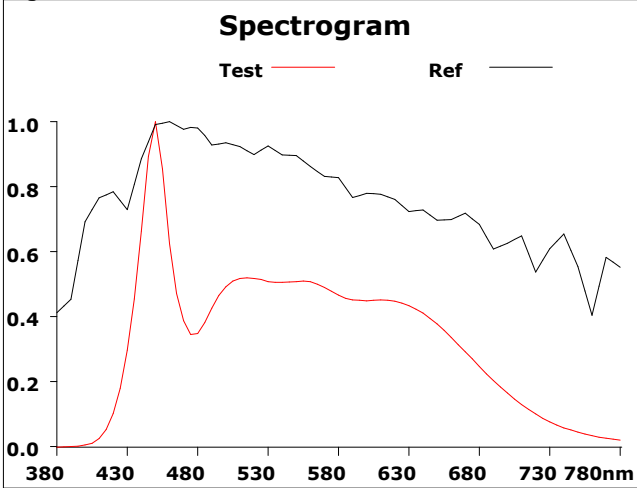


500			
Hue Bin	Rf	Chroma	Hue
1	94.8	-1.4%	-0.8%
2	96.0	-1.2%	1.5%
3	92.5	-0.3%	3.5%
4	92.6	0.3%	3.3%
5	92.3	0.4%	1.9%
6	95.8	2.2%	0.8%
7	97.4	1.3%	-0.3%
8	96.3	-0.9%	0.4%
9	94.1	-2.2%	3.6%
10	87.7	-1.5%	6.6%
11	84.0	1.7%	8.9%
12	91.4	2.3%	4.7%
13	92.8	5.2%	2.3%
14	92.7	3.8%	0.1%
15	86.6	9.2%	-7.1%
16	96.2	0.6%	-2.0%

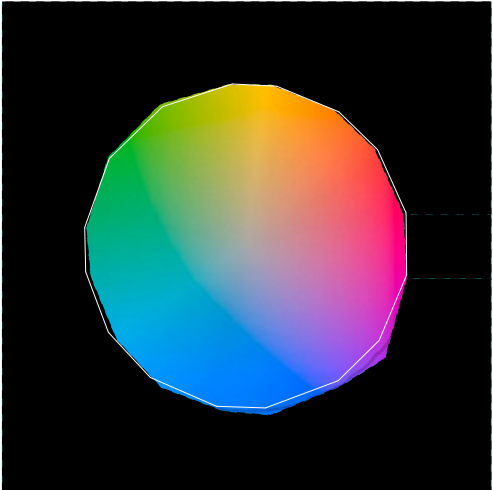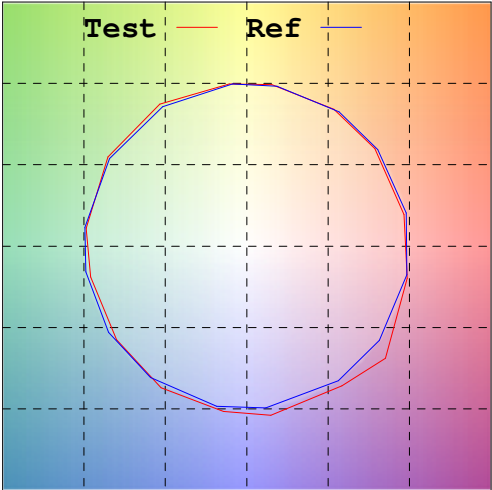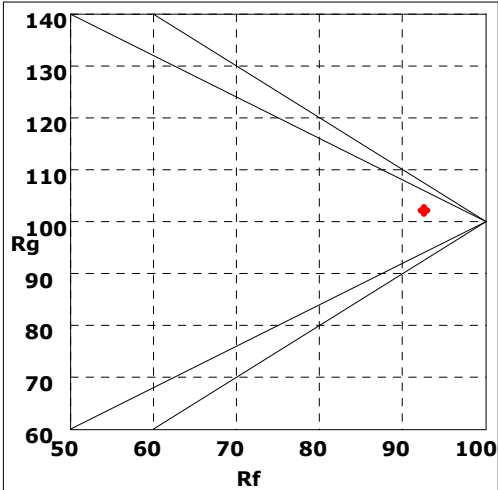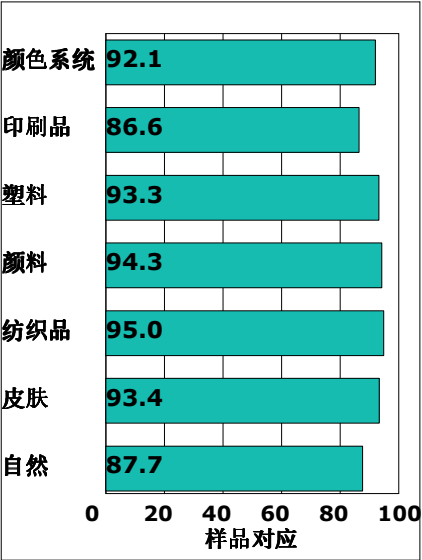

Rf by Bue



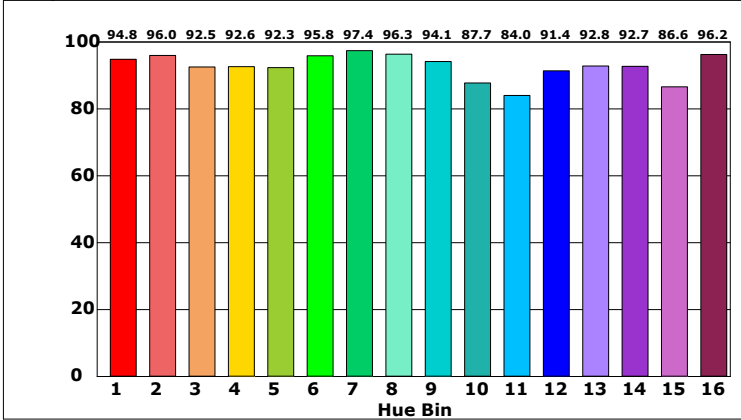


Chroma by Bue

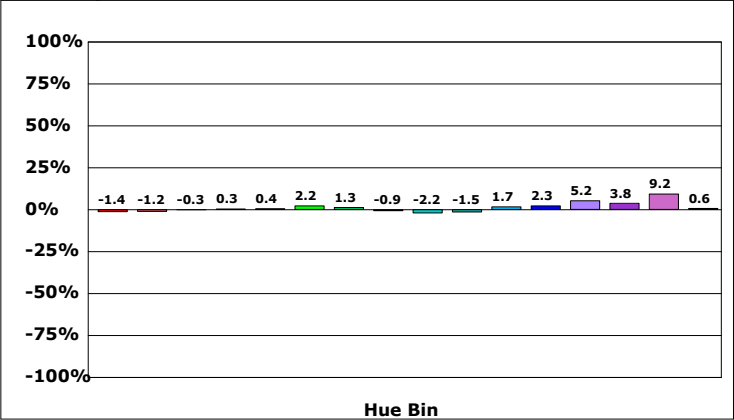


产品型号:P19
产品编号:
测试人员:
备注:


制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:12/14/12

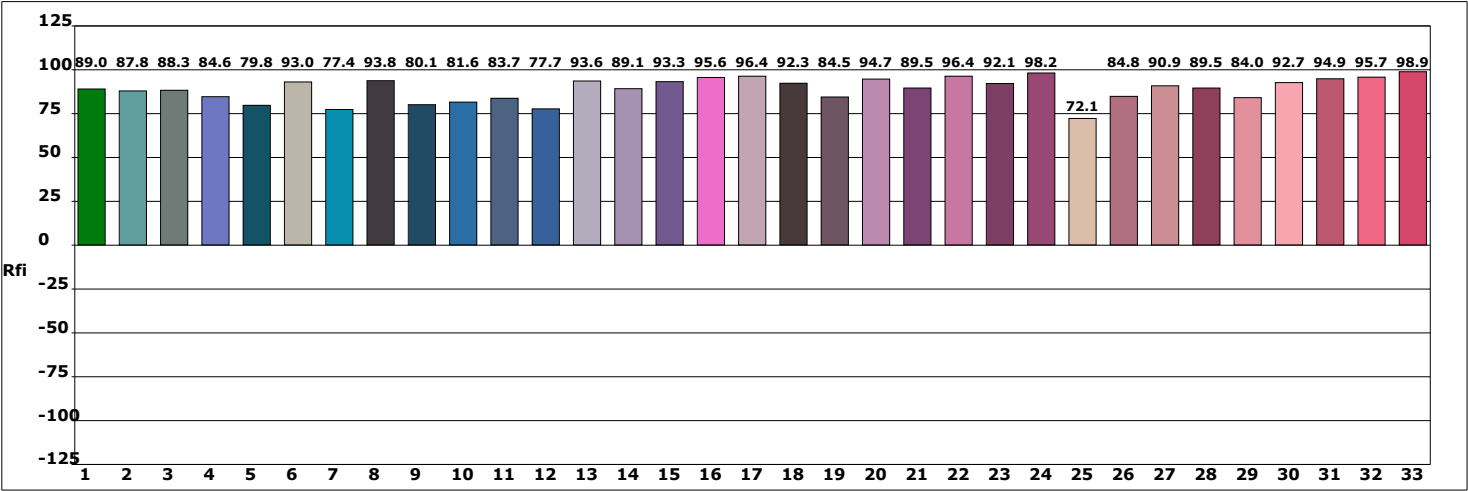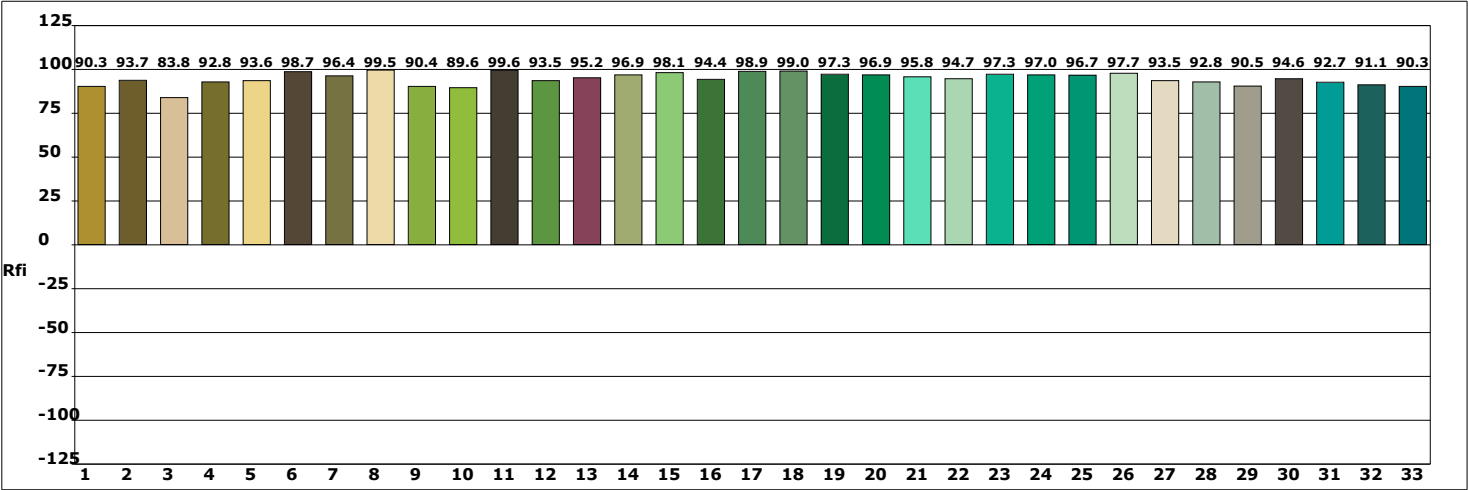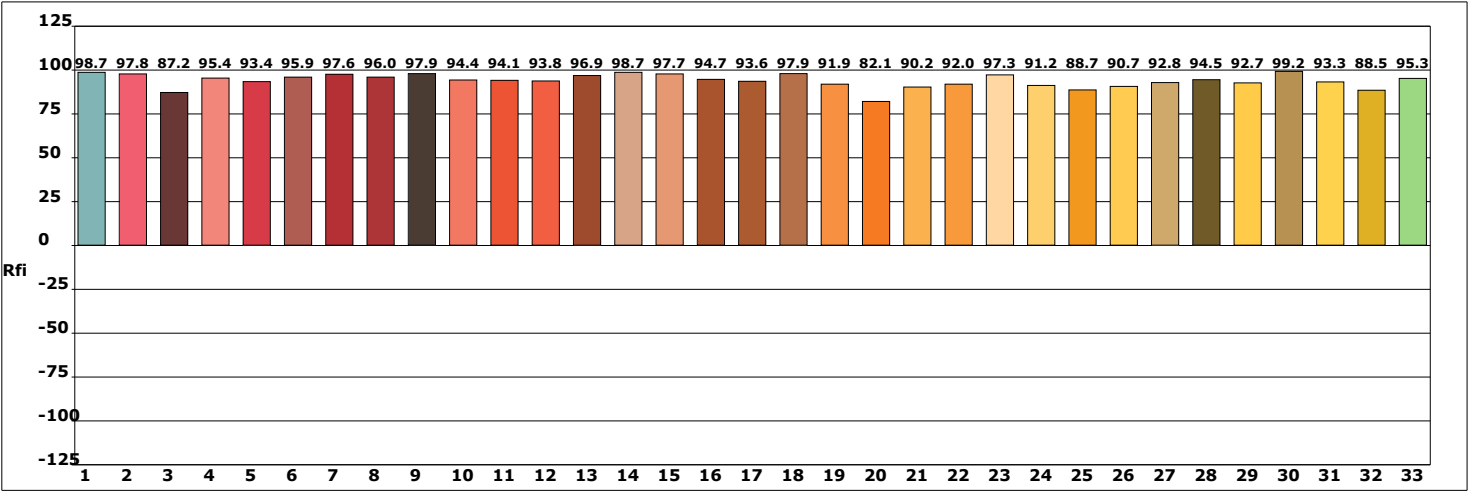

光谱图

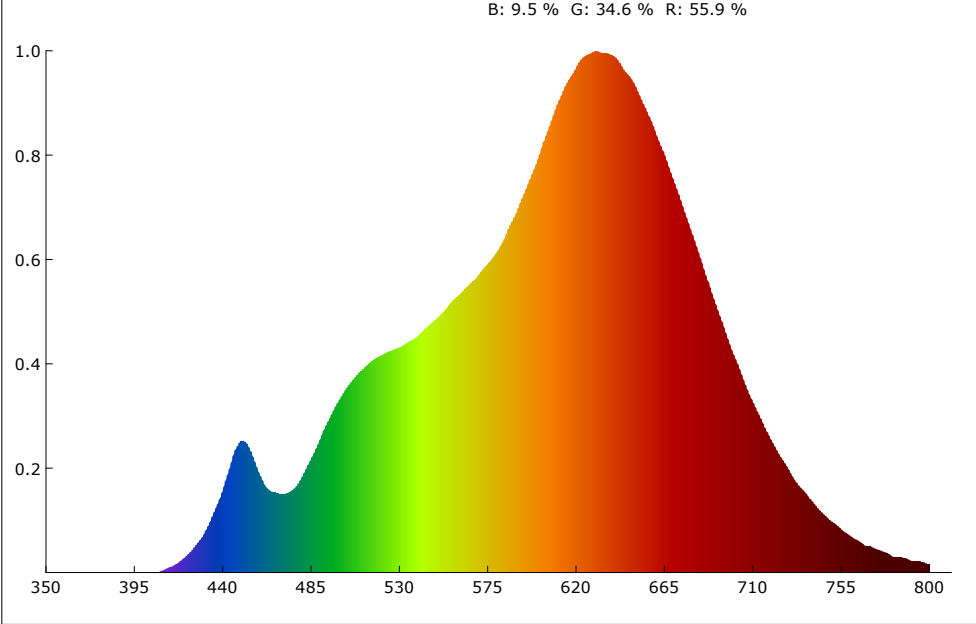

SDCM

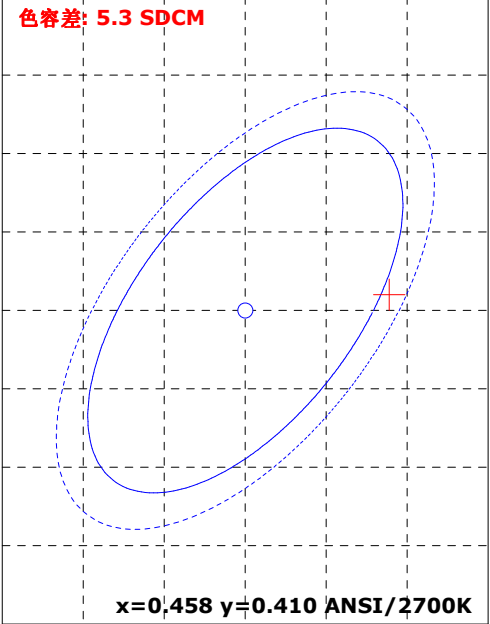

颜色参数:

坐标x: 0.4667 坐标y: 0.4111 坐标u: 0.2667 坐标v: 0.3524 坐标u': 0.2667 坐标v': 0.5286
红色比: 55.9 % 绿色比: 34.6 % 蓝色比: 9.5 % 光通量红色比: 27.5 % 光通量绿色比: 71.1 % 光通量蓝色比: 1.5 %


显色指数: 96.5 AvgR: 95.8
R1: 97.7 R2: 98.4 R3: 99.2 R4: 95.5 R5: 96.5 R6: 94.0 R7: 96.6 R8: 94.8
R9: 88.8 R10: 96.6 R11: 90.5 R12: 93.4 R13: 97.5 R14: 98.6 R15: 98.3

色温: 2610 K 光通量: 1841.276 lm 峰值波长: 630.5 nm 色容差: 5.3
明暗视觉比: 1.3 中心波长: 622.4 nm 主波长: 584.8 nm 质心波长: 608.5 nm
半宽度: 138.8 nm 色偏差: -0.00032 色纯度: 63.5 % 色质指数: 91.6
LER(TM-30): 256.5 辐射功率: 7178.1 mw 色域指数(Rg): 101.3 逼真度(Rf): 95.6
红光辐射功率: 3666.0 mw 近红辐射功率: 596.1 mw 远红辐射功率: 23.9 mw





电参数:

光效: 21.0 Lm/W 能效: 22.8 能效等级: G
电压: 219.0 V 电流: 0.633 A 功率: 87.810 W 功率因素: 0.632


Rf: 95.6 CCT: 2610K u': 0.2667
Rg: 101.3 LER: 256.5 Duv: -0.00032 v': 0.5286

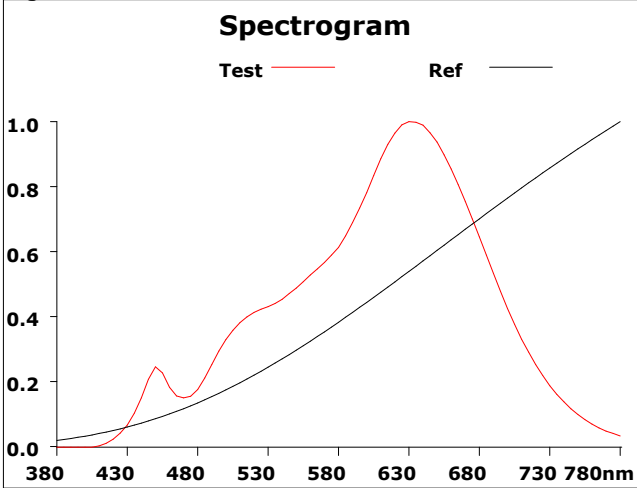


500			
Hue Bin	Rf	Chroma	Hue
1	96.5	-1.0%	-0.3%
2	97.8	-0.0%	-0.1%
3	96.1	0.2%	-0.1%
4	96.8	-0.8%	-1.4%
5	97.3	-0.3%	0.8%
6	95.6	1.8%	2.2%
7	97.2	1.1%	0.4%
8	94.8	3.1%	0.3%
9	96.3	1.6%	-0.5%
10	95.9	1.6%	-1.3%
11	96.6	1.8%	-0.7%
12	92.3	2.4%	-4.2%
13	91.9	1.1%	-5.8%
14	92.3	1.0%	-5.5%
15	95.5	-0.9%	-1.5%
16	92.1	-0.7%	-5.1%

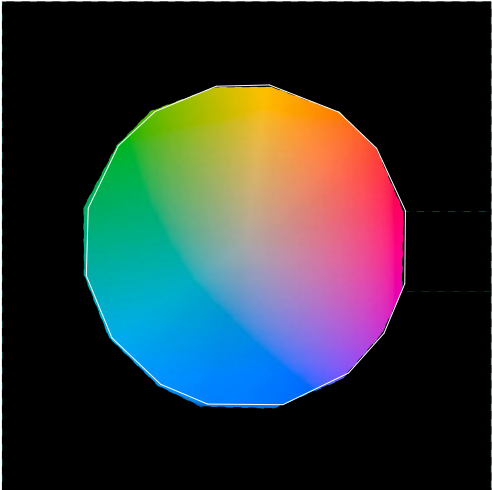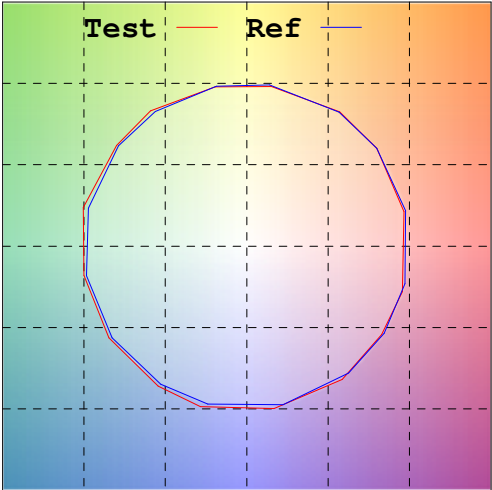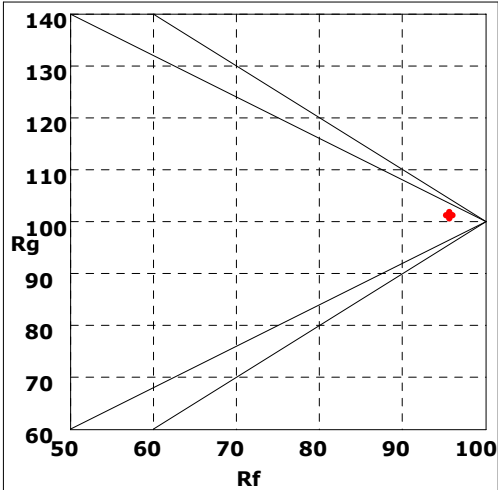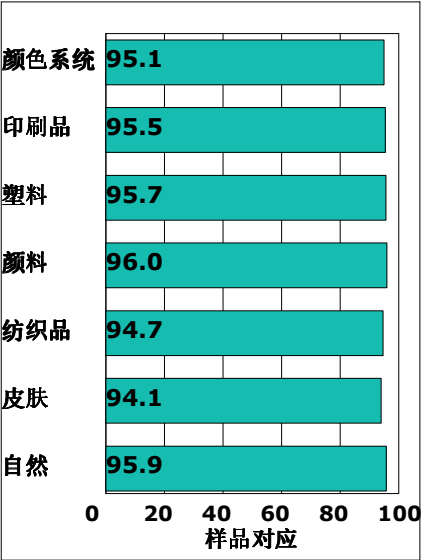

Rf by Bue



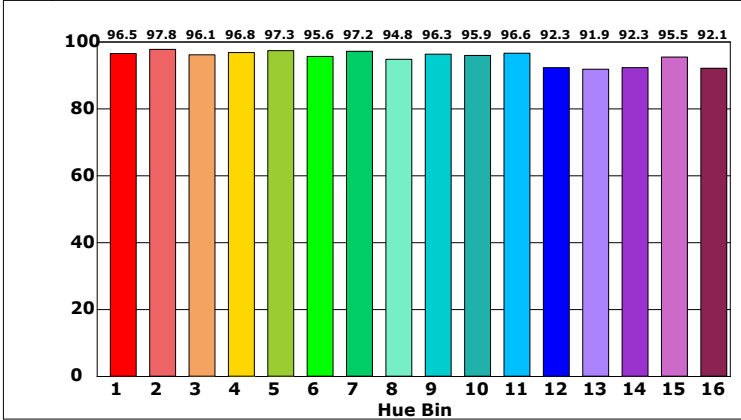


Chroma by Bue

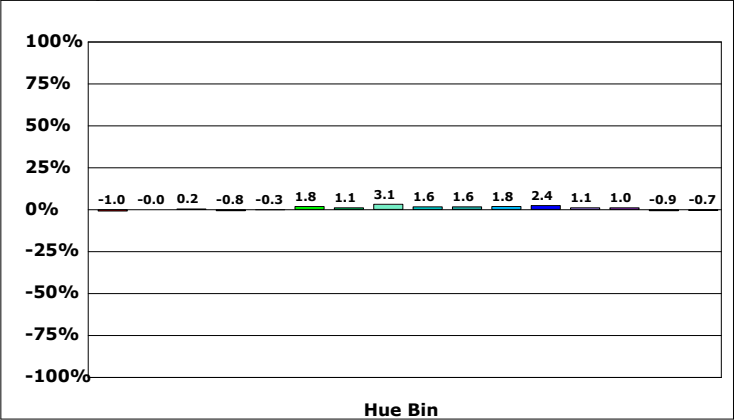


产品型号:P19
产品编号:
测试人员:
备注:


制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:12/14/12

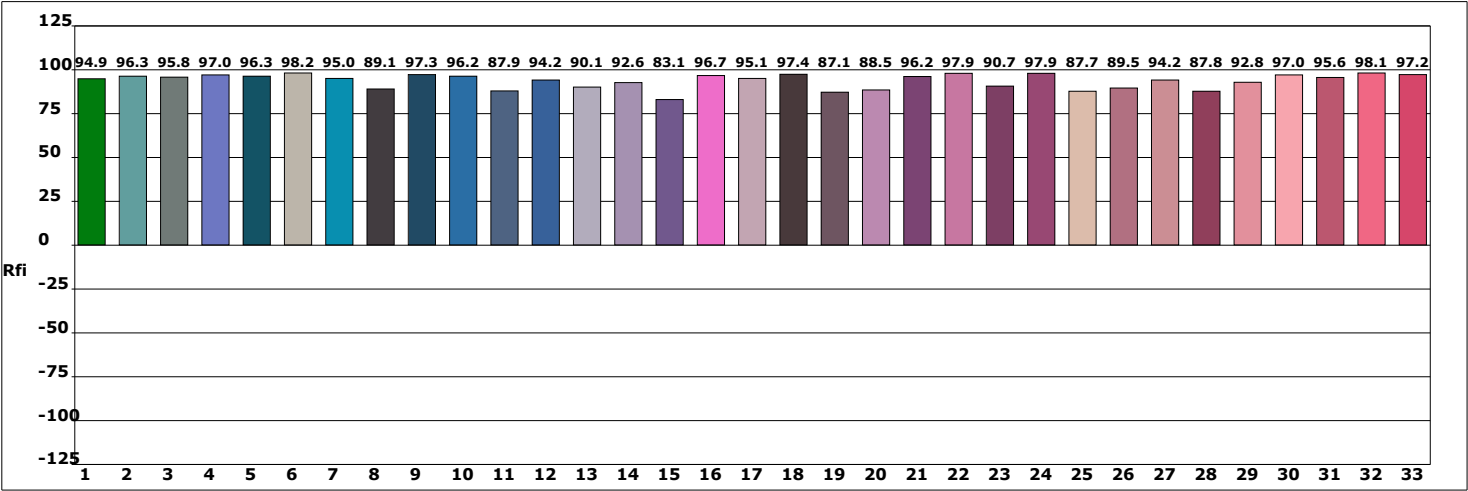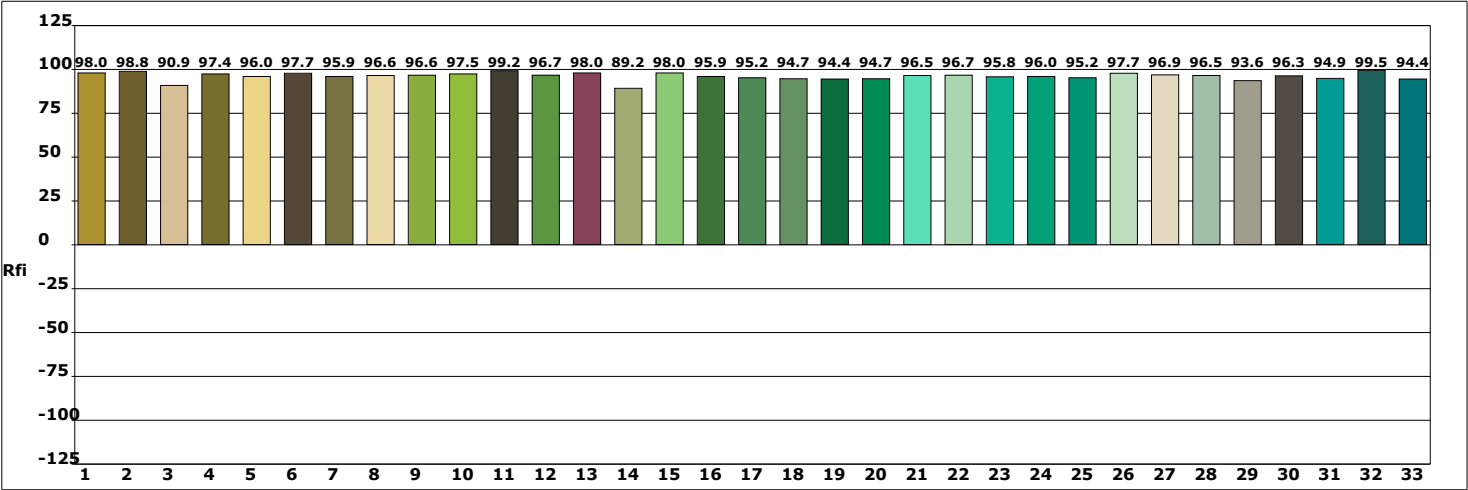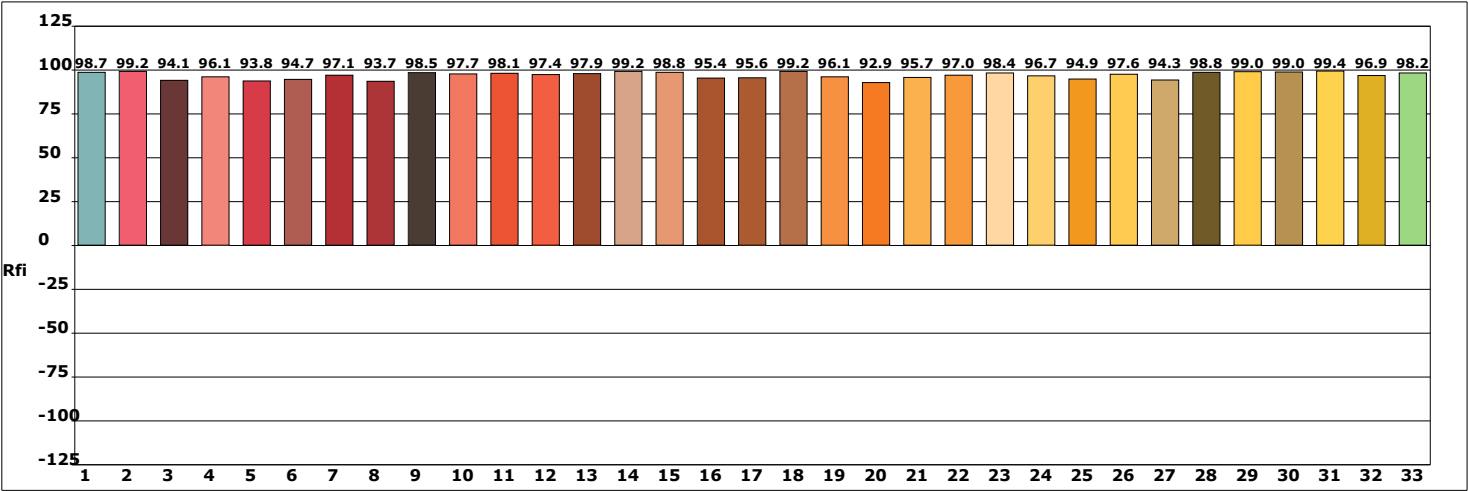

光谱图

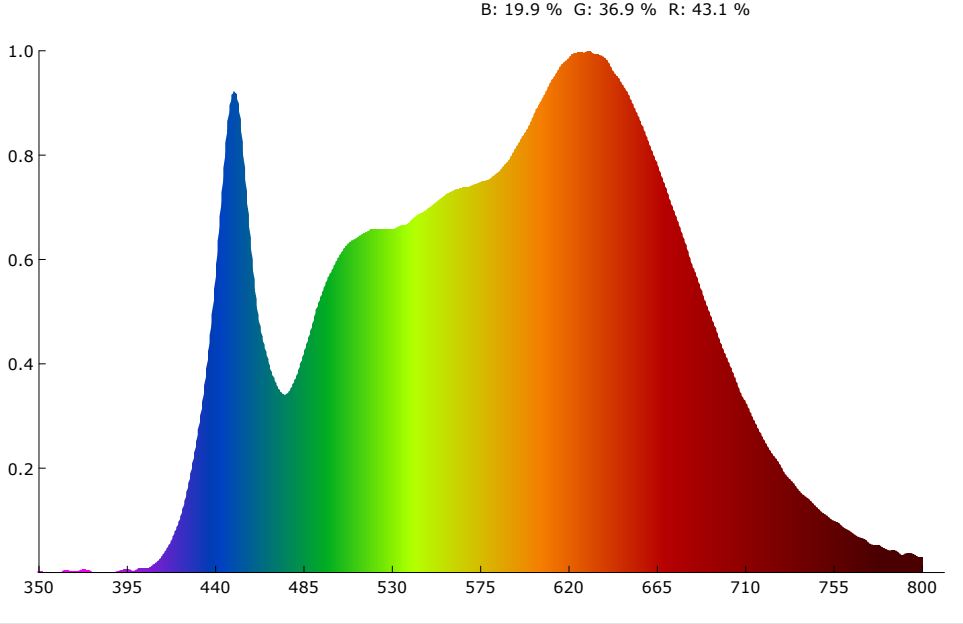

SDCM

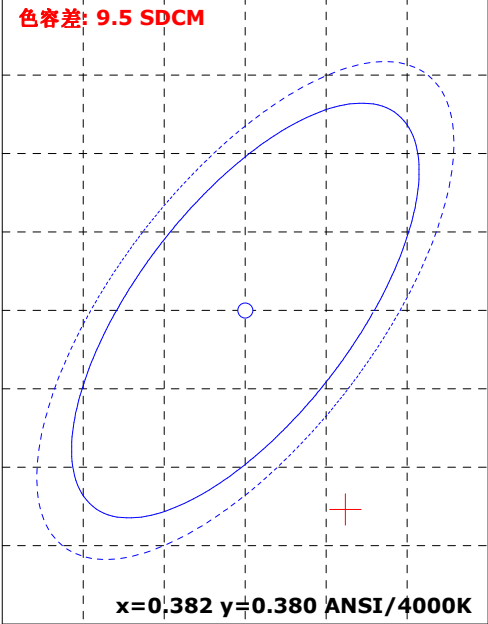

颜色参数:

坐标x: 0.3880 坐标y: 0.3670 坐标u: 0.2342 坐标v: 0.3322 坐标u': 0.2342 坐标v': 0.4983
红色比: 43.1 % 绿色比: 36.9 % 蓝色比: 19.9 % 光通量红色比: 21.8 % 光通量绿色比: 75.5 % 光通量蓝色比: 2.8 %


显色指数: 95.5 AvgR: 94.5
R1: 94.7 R2: 97.0 R3: 96.9 R4: 92.6 R5: 94.3 R6: 94.4 R7: 97.9 R8: 96.6
R9: 91.0 R10: 94.8 R11: 89.2 R12: 90.8 R13: 95.1 R14: 97.6 R15: 94.2

色温: 3716 K 光通量: 1808.606 lm 峰值波长: 630.5 nm 色容差: 9.5
明暗视觉比: 1.8 中心波长: 590.6 nm 主波长: 584.1 nm 质心波长: 584.8 nm
半宽度: 199.5 nm 色偏差: -0.00678 色纯度: 26.6 % 色质指数: 88.9
LER(TM-30): 260.3 辐射功率: 6947.1 mw 色域指数(Rg): 104.6 逼真度(Rf): 94.5
红光辐射功率: 2780.1 mw 近红辐射功率: 472.0 mw 远红辐射功率: 27.2 mw

电参数:

光效: 25.2 Lm/W 能效: 27.4 能效等级: G
电压: 219.0 V 电流: 0.528 A 功率: 71.820 W 功率因素: 0.620

Rf: 94.5 CCT: 3716K u': 0.2342
Rg: 104.6 LER: 260.3 Duv: -0.00678 v': 0.4983

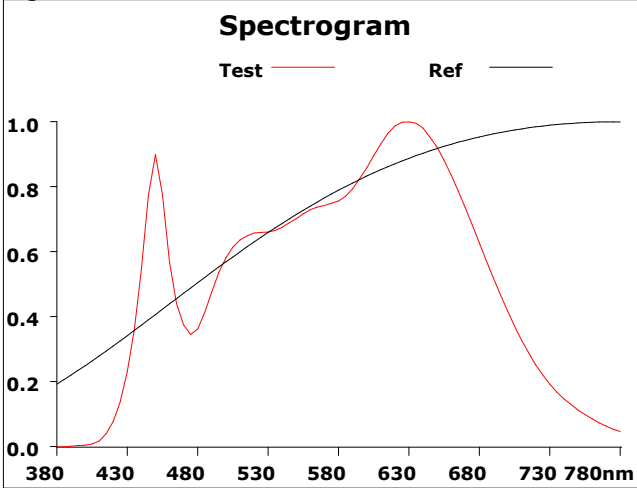

500			
Hue Bin	Rf	Chroma	Hue
1	96.5	0.8%	-0.6%
2	97.0	1.0%	0.0%
3	95.2	1.3%	1.7%
4	96.6	0.7%	0.8%
5	94.1	1.0%	1.3%
6	93.5	4.0%	1.2%
7	94.9	2.9%	0.2%
8	93.9	2.7%	-0.4%
9	95.6	1.6%	0.1%
10	96.9	0.5%	0.5%
11	92.0	2.4%	4.2%
12	91.4	3.6%	2.4%
13	95.8	2.8%	-0.1%
14	92.8	5.3%	-0.7%
15	93.1	3.2%	-1.4%
16	90.7	3.3%	-4.1%

