

F200T

200W tunable white LED fresnel zoom

F200T is a tunable white LED fresnel light with zoom. It's powered by 200W 2400K - 7000K LED source and zoom lens. The fixture comes with average high CRI over 95, TLCI over 96. Barndoor and color frame is included in delivery. The fixture is super compact for small exhibitions.


Key features:

- 200W WW + 200W CW LED
- 2400K - 7000K color temperature
- Average CRI 95
- 25° - 60° zoom lens, single side zoom
- Flicker free with selectable PWM
- Rotary, key, DMX control of dimmer
- Intelligent fan, silent operation for studio and theatre use
- Super compact body, only 2.5 kg, easy to install and setup
- Powercon in, DMX in & out

Application:

- Broadcast, HD studio
- Theatre, church
- Fashion show
- Museum
- Exhibition


Accessories:



barn door




Gel frame

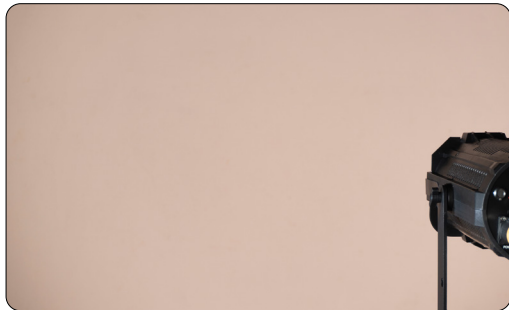


Photometric

WW(lx)	13200	2950	1170	628	420	291	226	179	142	113
CW(lx)	15600	4100	1610	906	582	409	311	246	195	152
Full on(lx)	14200	3690	1390	790	490	362	278	218	173	139

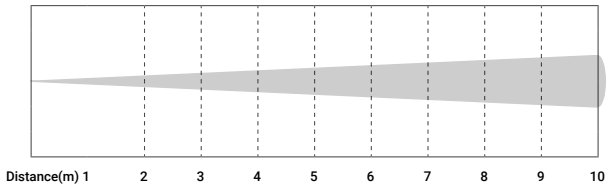

Minimum Spot - 25°

WW(lx)	5830	1380	582	312	213	152	120	95	74	60
CW(lx)	8150	1950	766	439	299	212	167	131	103	83
Full on(lx)	7110	1720	692	388	263	186	147	116	92	73

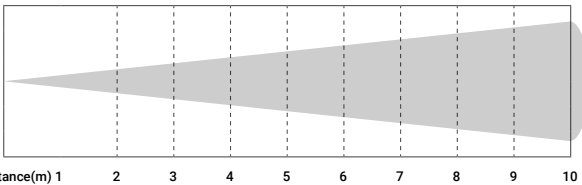

Maximum Spot - 60°

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	200W WW + 200W CW
Color temperature:	2400K - 7000K tunable
Zoom range:	25° - 60° manual zoom
Color Rendition:	CRI 95
Power connection:	Power in
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5

Control mode:	Rotary, DMX, RDM
Housing:	Color black
Size:	311 * 188 * 124mm
N.W.:	2.5 kg
G.W.:	4 kg
Accessories(incl.):	Power cable, barndoor, gel frame, Safety rope
Environment:	IP20

