



光谱图

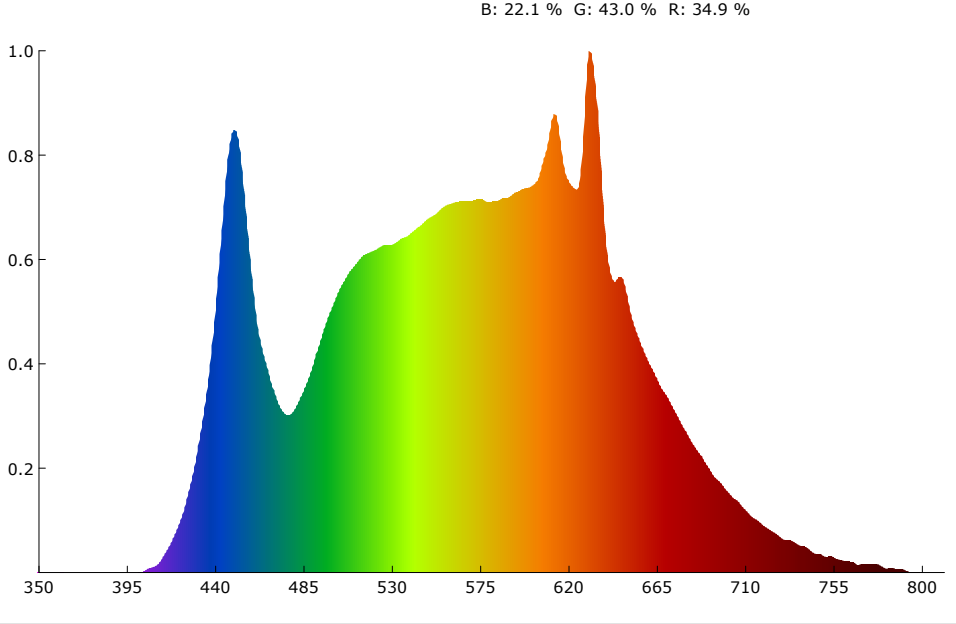

SDCM

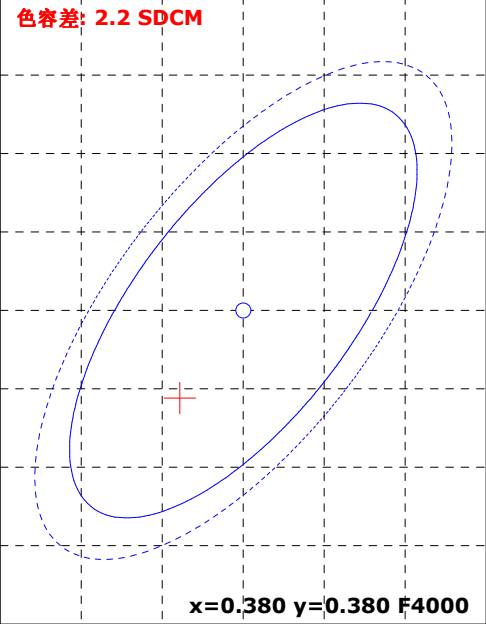

颜色参数:

坐标x: 0.3761 坐标y: 0.3744 坐标u: 0.2232 坐标v: 0.3333 坐标u': 0.2232 坐标v': 0.4999
红色比: 34.9 % 绿色比: 43.0 % 蓝色比: 22.1 % 光通量红色比: 19.0 % 光通量绿色比: 78.3 % 光通量蓝色比: 2.7 %

显色指数: 93.3 AvgR: 90.3
R1: 94.0 R2: 95.1 R3: 95.2 R4: 94.4 R5: 93.4 R6: 93.1 R7: 94.6 R8: 86.9
R9: 64.7 R10: 87.7 R11: 94.7 R12: 77.7 R13: 94.2 R14: 96.9 R15: 91.3


色温: 4102 K 光通量: 475.093 lm 峰值波长: 631.5 nm 色容差: 2.2
明暗视觉比: 1.8 中心波长: 575.0 nm 主波长: 578.6 nm 质心波长: 566.6 nm
半宽度: 151.8 nm 色偏差: 0.00020 色纯度: 25.2 % 色质指数: 89.5
LER(TM-30): 306.9 辐射功率: 1548.0 mw 色域指数(Rg): 99.8 逼真度(Rf): 91.1
红光辐射功率: 524.3 mw 近红辐射功率: 46.1 mw 远红辐射功率: 1.1 mw

电参数:







光效: 48.9 Lm/W 能效: 53.2 能效等级: G
电压: 222.1 V 电流: 0.087 A 功率: 9.720 W 功率因素: 0.501




产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/04/13
备注:

Rf: 91.1 CCT: 4102K u': 0.2232
Rg: 99.8 LER: 306.9 Duv: 0.00020 v': 0.4999

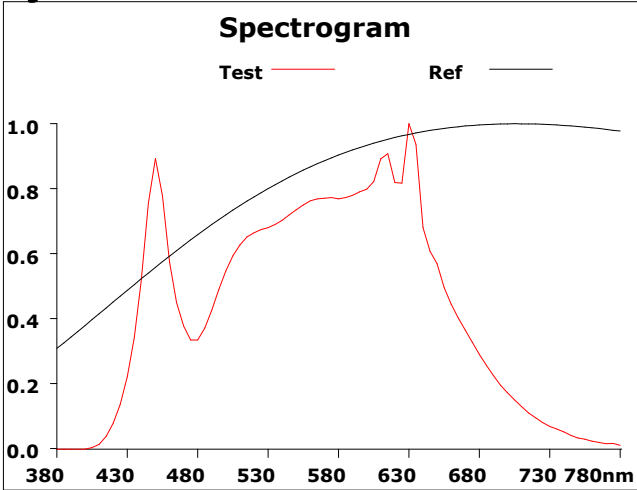


500			
Hue Bin	Rf	Chroma	Hue
1	90.6	-4.7%	-0.8%
2	93.8	-2.5%	1.7%
3	89.3	-1.5%	4.7%
4	93.3	-0.4%	2.8%
5	92.8	-0.2%	2.2%
6	95.6	2.1%	0.4%
7	96.9	-0.6%	-0.8%
8	95.3	-1.6%	0.1%
9	93.4	-2.2%	3.1%
10	88.8	-2.7%	5.5%
11	85.6	2.4%	8.1%
12	89.3	4.0%	3.2%
13	89.8	5.5%	-4.7%
14	93.7	2.6%	-1.8%
15	86.9	1.2%	-8.6%
16	86.1	-0.7%	-7.9%

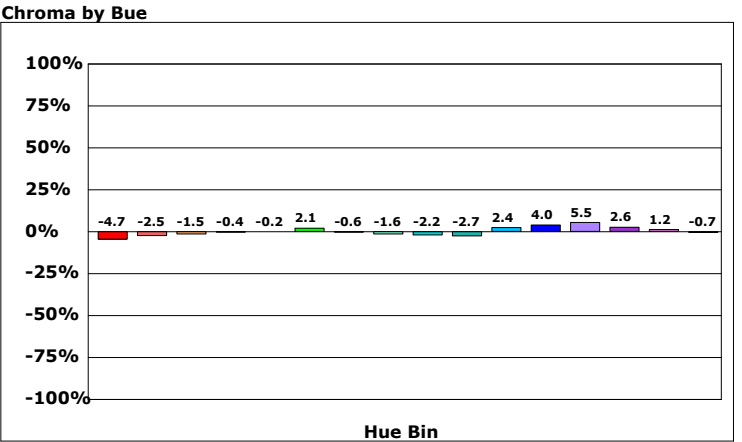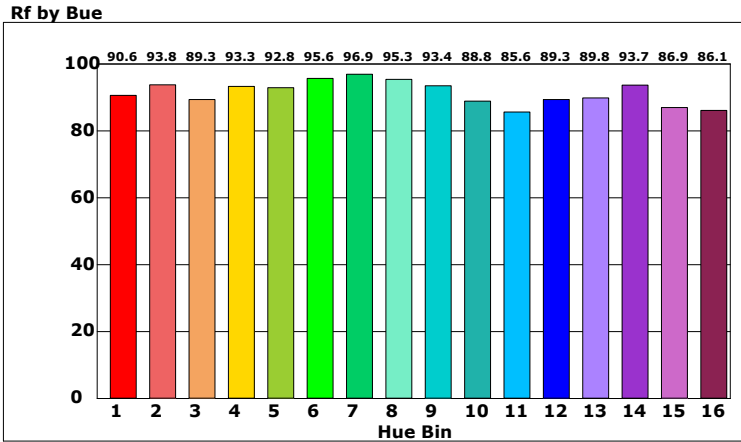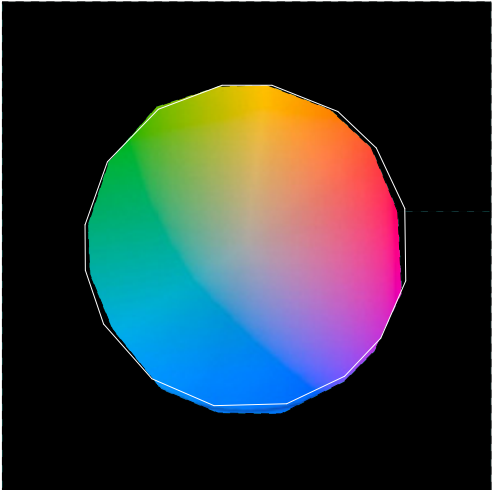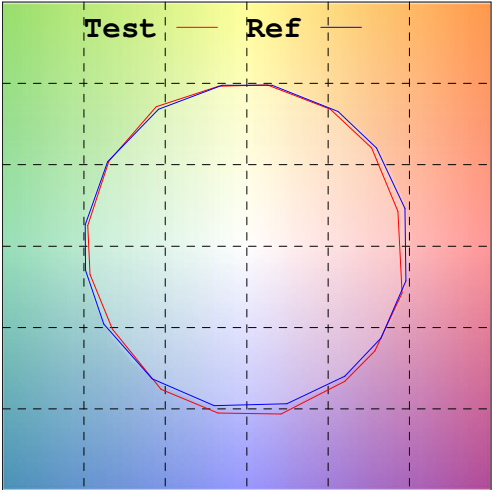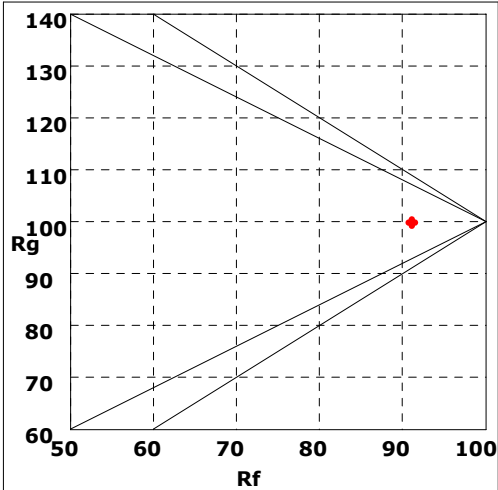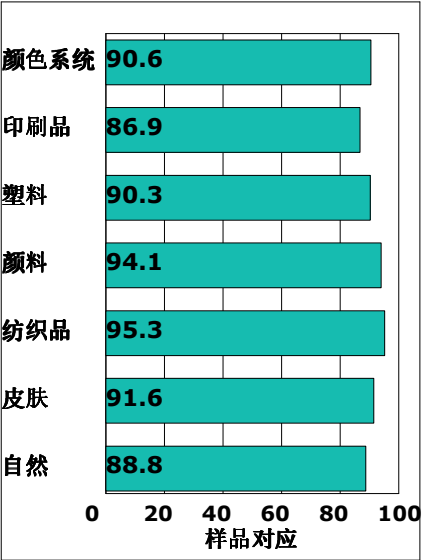


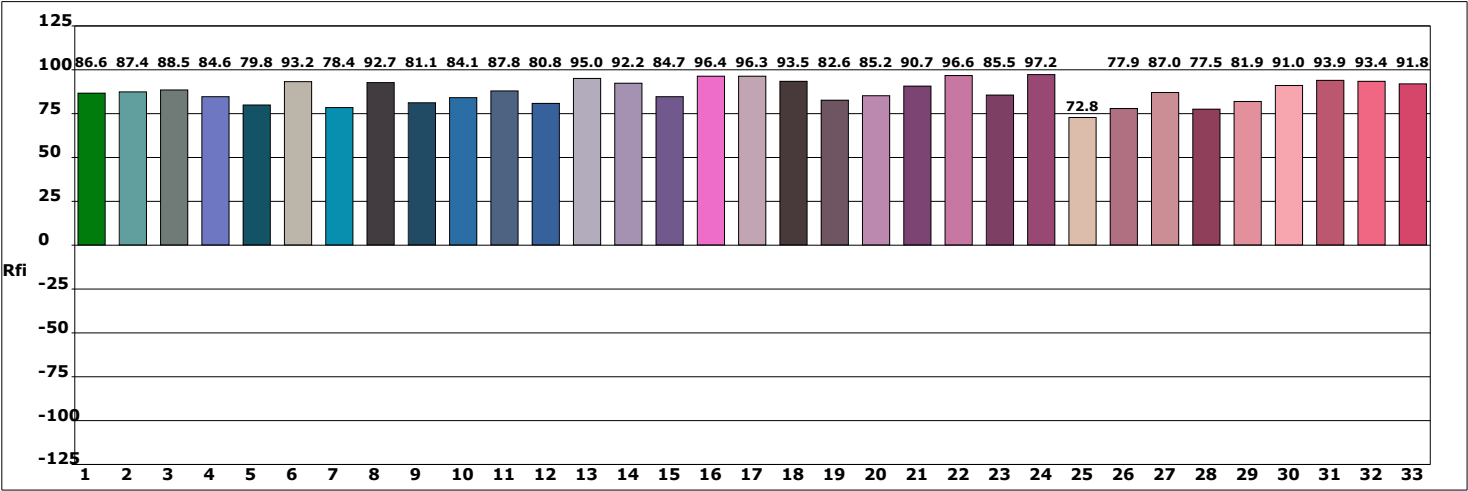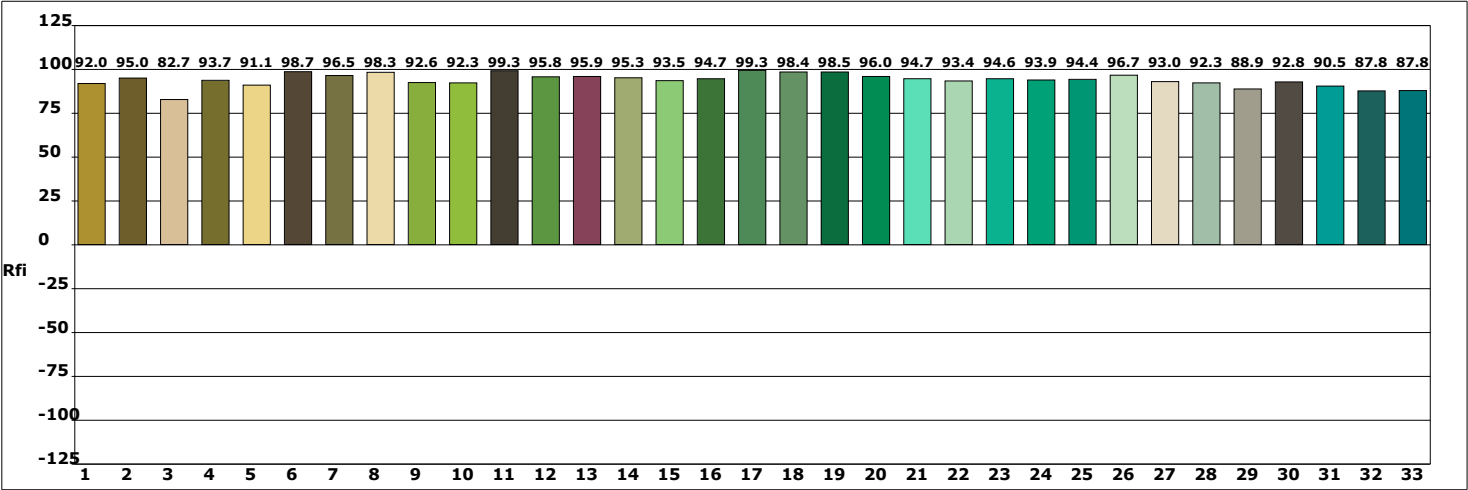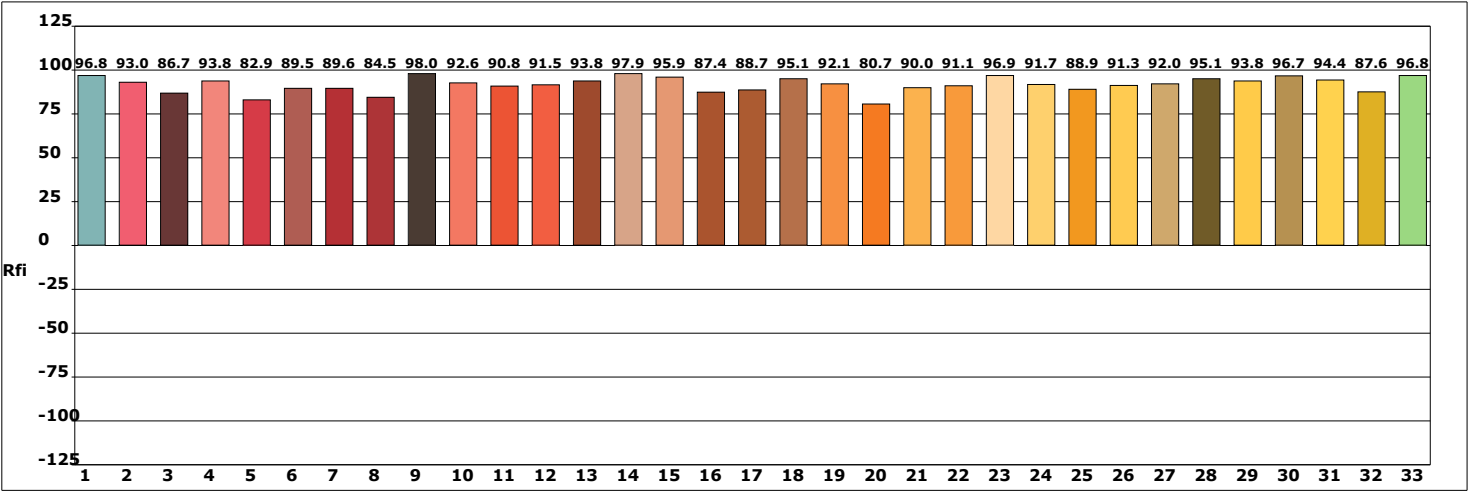

光谱图

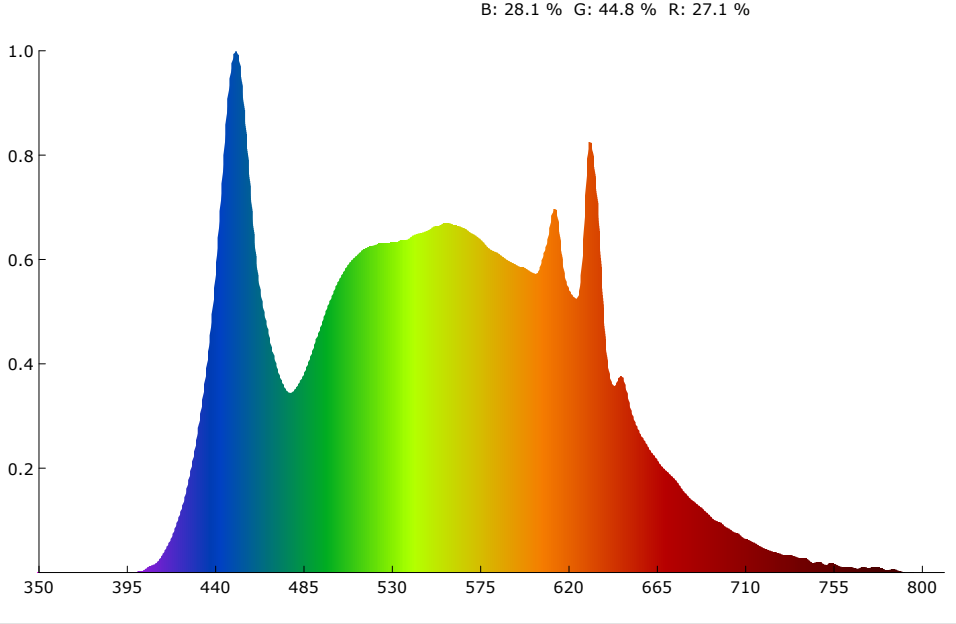

SDCM

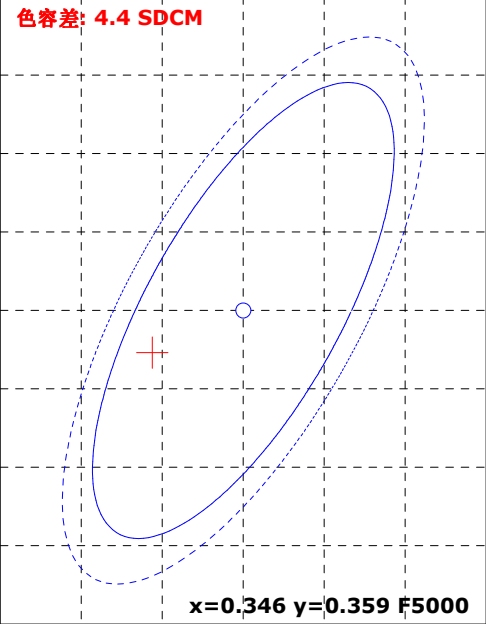

颜色参数:

坐标x: 0.3394 坐标y: 0.3573 坐标u: 0.2054 坐标v: 0.3244 坐标u': 0.2054 坐标v': 0.4866
红色比: 27.1 % 绿色比: 44.8 % 蓝色比: 28.1 % 光通量红色比: 15.7 % 光通量绿色比: 80.9 % 光通量蓝色比: 3.4 %


显色指数: 90.1 AvgR: 85.9
R1: 89.5 R2: 92.0 R3: 93.8 R4: 90.8 R5: 89.4 R6: 89.3 R7: 93.4 R8: 83.0
R9: 49.7 R10: 80.9 R11: 90.8 R12: 73.1 R13: 89.9 R14: 96.5 R15: 86.4

色温: 5235 K 光通量: 501.939 lm 峰值波长: 450.6 nm 色容差: 4.4
明暗视觉比: 2.1 中心波长: 451.8 nm 主波长: 563.8 nm 质心波长: 550.8 nm
半宽度: 25.5 nm 色偏差: 0.00518 色纯度: 9.1 % 色质指数: 91.7
LER(TM-30): 312.1 辐射功率: 1608.2 mw 色域指数(Rg): 98.4 逼真度(Rf): 89.0
红光辐射功率: 427.1 mw 近红辐射功率: 29.1 mw 远红辐射功率: 0.7 mw





电参数:

光效: 52.2 Lm/W 能效: 56.8 能效等级: G
电压: 222.1 V 电流: 0.086 A 功率: 9.620 W 功率因素: 0.500


Rf: 89.0 CCT: 5235K u': 0.2054
Rg: 98.4 LER: 312.1 Duv: 0.00518 v': 0.4866

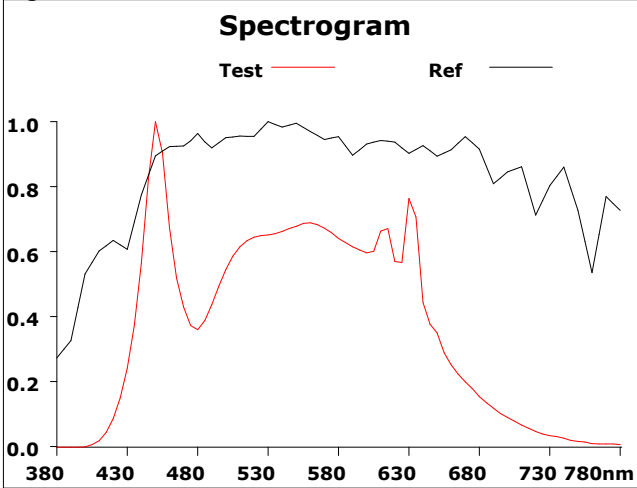


500			
Hue Bin	Rf	Chroma	Hue
1	84.9	-6.9%	-1.1%
2	91.6	-4.2%	2.3%
3	85.8	-2.5%	6.3%
4	91.5	-0.2%	4.2%
5	91.9	0.4%	2.8%
6	95.4	2.1%	-0.1%
7	95.7	-1.3%	-1.7%
8	92.1	-3.8%	-0.6%
9	91.0	-4.9%	4.6%
10	84.6	-3.2%	7.8%
11	82.2	1.6%	9.6%
12	92.7	3.5%	2.0%
13	89.4	5.8%	-4.4%
14	88.6	3.2%	-5.0%
15	80.1	3.7%	-15.1%
16	88.6	-2.3%	-5.8%

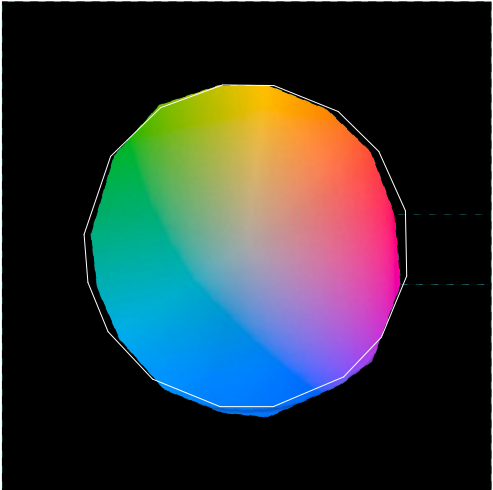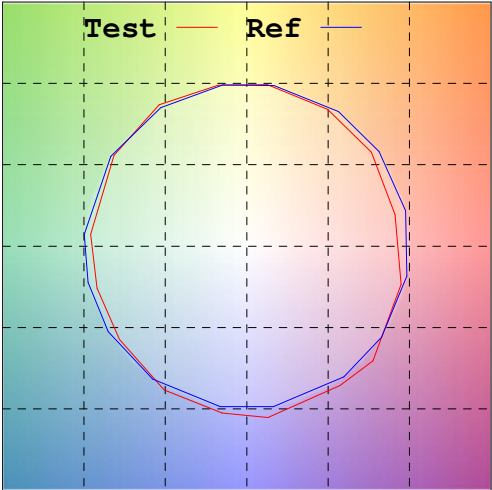
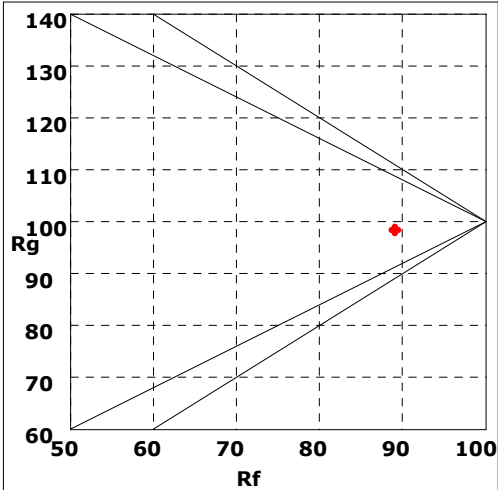
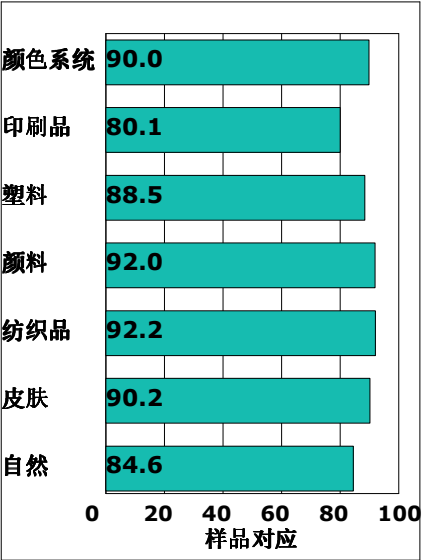


Rf by Bue

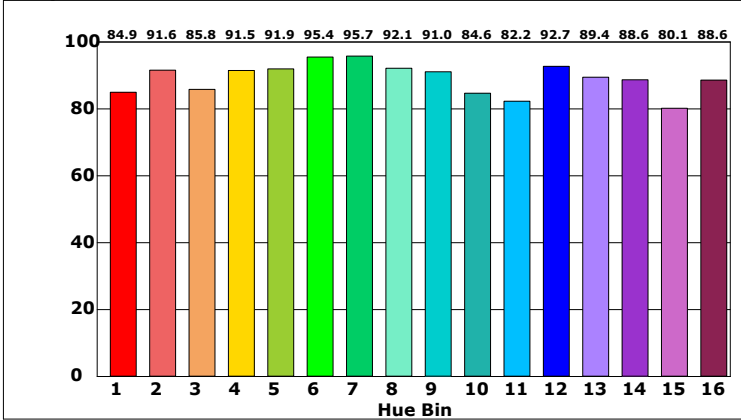


Chroma by Bue

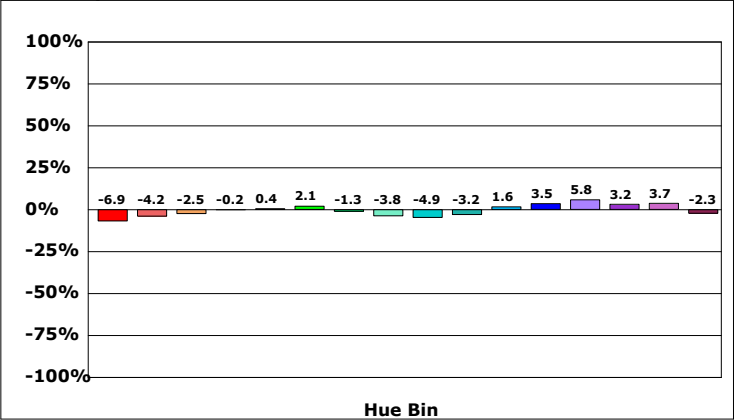


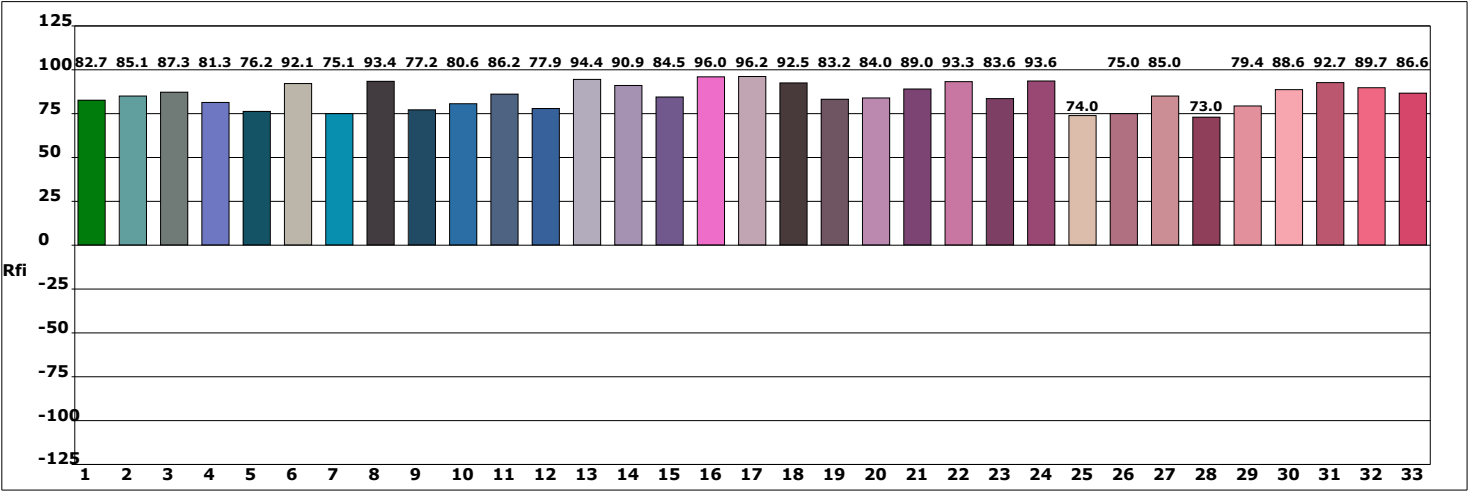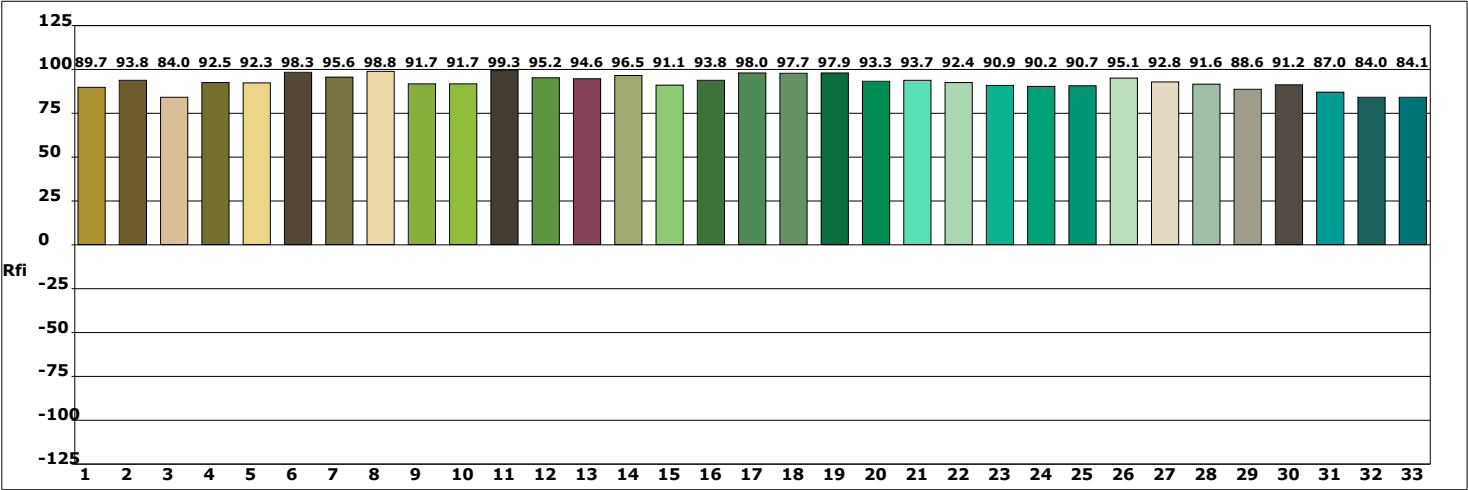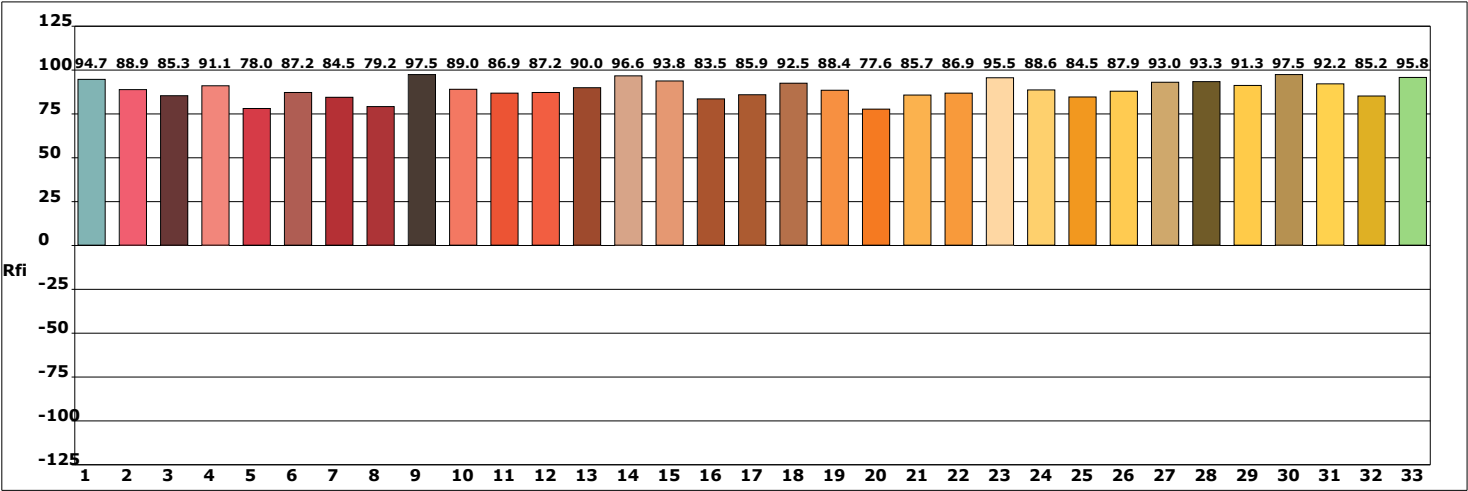

光谱图

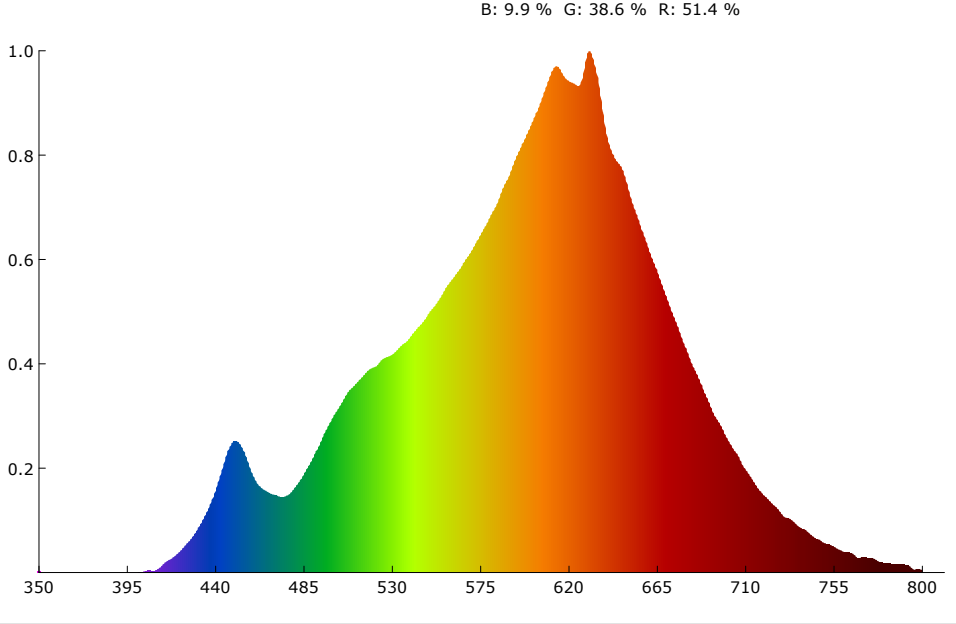

SDCM

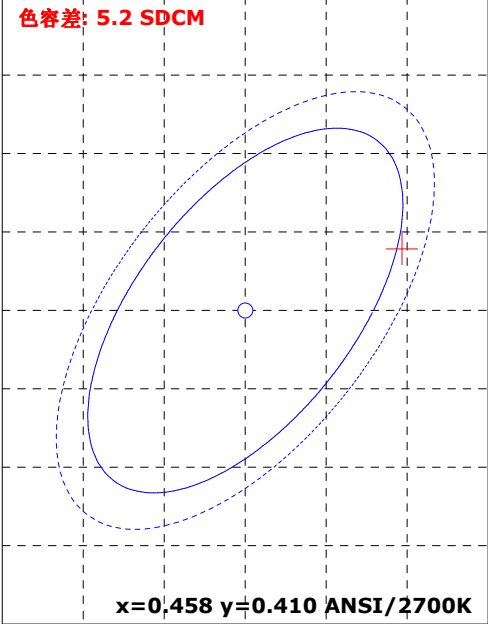

颜色参数:

坐标x: 0.4675 坐标y: 0.4140 坐标u: 0.2659 坐标v: 0.3532 坐标u': 0.2659 坐标v': 0.5298
红色比: 51.4 % 绿色比: 38.6 % 蓝色比: 9.9 % 光通量红色比: 26.3 % 光通量绿色比: 72.3 % 光通量蓝色比: 1.3 %

显色指数: 92.3 AvgR: 89.8
R1: 92.1 R2: 96.3 R3: 99.1 R4: 93.7 R5: 93.3 R6: 97.8 R7: 89.5 R8: 76.7
R9: 50.4 R10: 91.9 R11: 96.2 R12: 91.6 R13: 93.1 R14: 99.3 R15: 86.0


色温: 2622 K 光通量: 394.071 lm 峰值波长: 630.5 nm 色容差: 5.2
明暗视觉比: 1.2 中心波长: 611.0 nm 主波长: 584.4 nm 质心波长: 598.8 nm
半宽度: 121.8 nm 色偏差: 0.00066 色纯度: 64.6 % 色质指数: 88.1
LER(TM-30): 291.7 辐射功率: 1350.9 mw 色域指数(Rg): 98.7 逼真度(Rf): 91.9
红光辐射功率: 655.4 mw 近红辐射功率: 74.4 mw 远红辐射功率: 2.7 mw

电参数:





光效: 40.7 Lm/W 能效: 44.3 能效等级: G
电压: 222.1 V 电流: 0.087 A 功率: 9.690 W 功率因素: 0.500

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/04/13
备注:


Rf: 91.9 CCT: 2622K u': 0.2659
Rg: 98.7 LER: 291.7 Duv: 0.00066 v': 0.5298

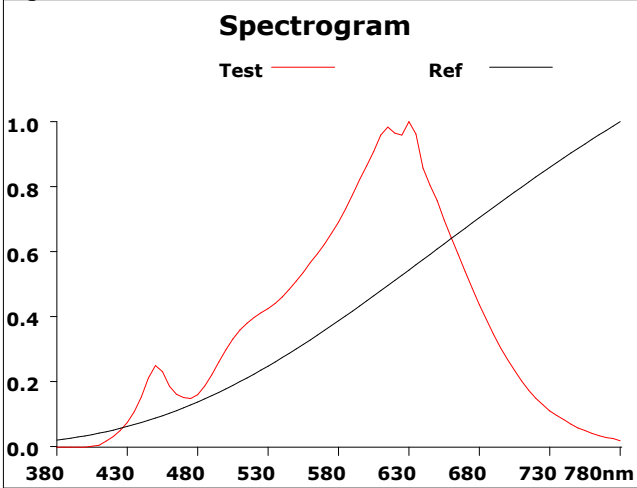

500			
Hue Bin	Rf	Chroma	Hue
1	88.3	-5.8%	-0.3%
2	90.5	-3.8%	3.0%
3	89.6	-1.6%	4.7%
4	94.8	0.1%	2.3%
5	96.5	1.1%	2.4%
6	95.1	2.3%	1.2%
7	94.7	-0.5%	-2.8%
8	98.0	0.2%	-0.4%
9	96.2	-1.7%	0.2%
10	94.4	-1.1%	2.2%
11	93.3	0.8%	3.7%
12	90.0	3.2%	-1.8%
13	88.0	2.7%	-8.0%
14	85.7	1.8%	-10.5%
15	89.6	-1.8%	-5.5%
16	84.9	-5.3%	-8.9%

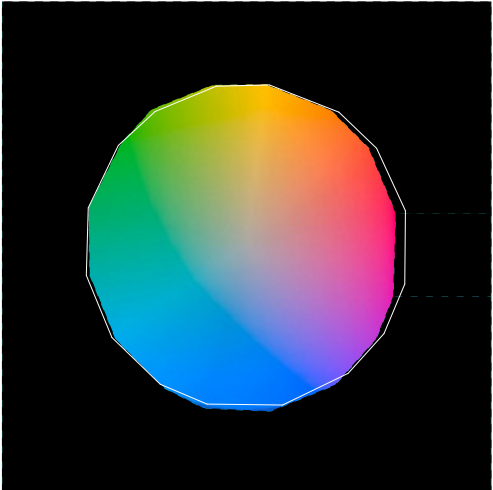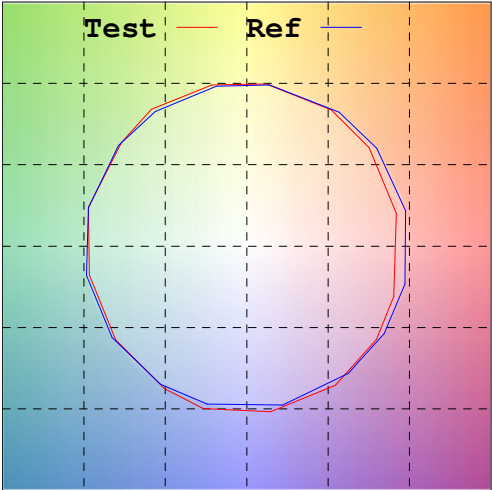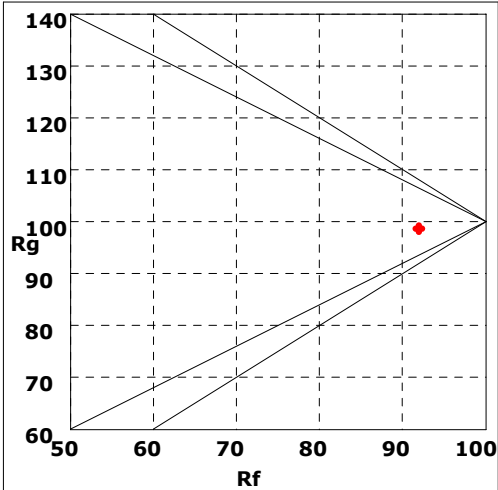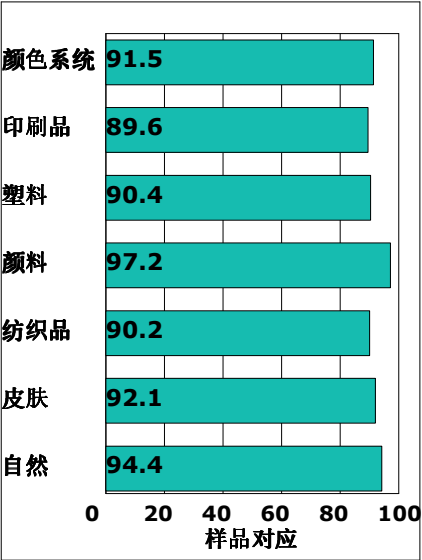

Rf by Bue

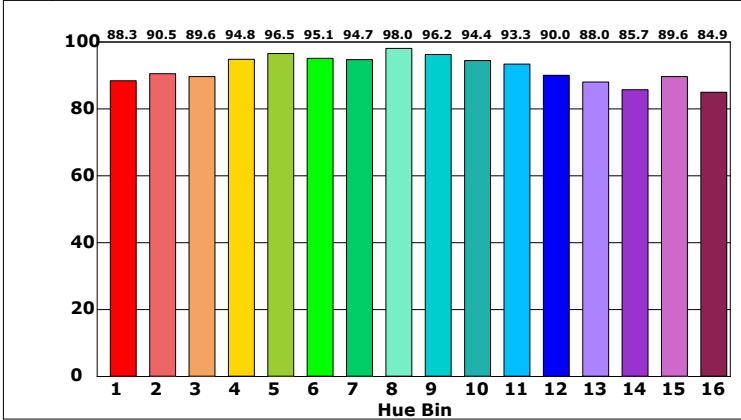

Chroma by Bue

