


Outdoor LED City Color

8x50W WW+CW LED

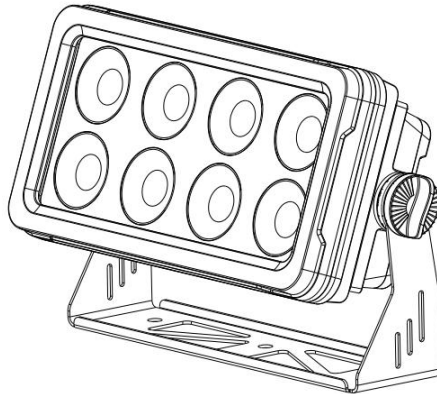

USER MANUAL

Thank you very much for choosing our product. For safety purpose, please read this manual carefully before your operation. This manual included installation and using information. Please install and operate it according to this manual.

Part 1 Product

1.1 Product introduction

This product is designed for outdoor/indoor use. Suitable applications include wash or effect lighting for architectural, stage or nightclub applications. This product can also be installed for use in signage and advertising using the dynamic functions available with DMX512 control. Direct input of DMX512 signal allows the units to be controlled from any DMX512 controller. This product can be operated as a single unit or in multiple units for large applications.

1.2 Technical Specifications

Input voltage: AC100-240V, 50/60Hz

Rated power: 400W

Light source: 8*50W WW (3200K) +CW (5600K) LED

Channel: 2/4/6/16/20 channels

Strobe: 0-20Hz

Control: international standard DMX512

Lens angle: 25°

Display: OLED function menu with 4 buttons

Heat dissipation: intelligent temperature control, active

Maximum ambient temperature 40° C

Minimum ambient temperature -20° C

Maximum case temperature 65° C

Power connection IP65 Seetronic power connectors input/output

Data connection IP65 Seetronic DMX connectors input/output

LED life: 50,000-100,000 hours

Waterproof rating: IP65

Net weight: 7.5kg

Features:

4 dimming curves, high standard linear dimming

Exquisite die-cast aluminum housing, IP65 protection level, suitable for outdoor performances

Silent operation, no flicker output

Unique structure design, excellent natural heat dissipation effect

Double hanger design, convenient for air suspension and ground placement

DMX control, RDM intelligent control.

Features and advantages: Adopt waterproof sealing design, high color purity, special optical design, more uniform light effect, waterproof grade IP65. Suitable for various indoor and outdoor performances, environmental art lighting, outdoor lighting and other dyeing and lighting effects.

1.3 Safety Warning

IMPORTANT:

ALWAYS READ THE USER MANUAL BEFORE OPERATION. PLEASE CONFIRM THAT THE POWER SUPPLY STATED ON THE PRODUCT IS THE SAME AS THE MAINS POWER SUPPLY IN YOUR AREA.

- This product must be installed by a qualified professional.
- Always operate the equipment as described in the user manual.
- A minimum distance of 0.5m must be maintained between the equipment and combustible surface.
- The product must always be placed in a well ventilated area.
- Always make sure that the equipment is installed securely.
- DO NOT stand close to the equipment and stare directly into the LED light source.
- Always disconnect the power supply before attempting and maintenance.
- Always make sure that the supporting structure is solid and can support the combined weight of the products.
- The earth wire must always be connected to the ground.
- Do not touch the power cables if your hands are wet.

ATTENTION:

- This product left the place of manufacture in perfect condition. In order to maintain this condition and for safe operation, the user must always follow the instructions and safety warnings described in this user manual.
- Avoid shaking or strong impacts to any part of the equipment.
- Make sure that all parts of the equipment are kept clean and free of dust.
- Always make sure that the power connections are connected correct and secure.
- If there is any malfunction of the equipment, contact your distributor immediately.
- When transferring the product, it is advisable to use the original packaging in which the product left the factory.
- Shields, lenses or ultraviolet screens shall be changed if they have become damaged to such an extent that their effectiveness is impaired.
- The lamp (LED) shall be changed if it has become damaged or thermally

deformed.

PART 2 INSTALLATION

2.1 Mounting:

2.1-1 Hanging

The product can be mounted in a hanging position using the supporting bracket. The bracket should be secured to the mounting truss or structure using a standard mounting clamp. Please note that when hanging the unit a safety cable should also be used

2.1-2 Upright

The product can be mounted in an upright or sitting position using the supporting brackets.

NOTE:

The product can be mounted at any angle and in any position. It is possible to further adjust the angle of the product using the two adjustment knobs located on the side of the fixture.


2.2 Special construction for DMX connection.

- ☆ At last fixture, the DMX cable has to be terminated with a terminator to reduce signal errors. Solder a 120-ohm 1/4W resistor between pin 2(DMX-) and pin 3(DMX+) into a 3-pin XLR-plug and plug it in the DMX-output of the last fixture.
- ☆ If the controller is 5-pin output, it's necessary to use an adaptor to transfer signal from 5-pin output to 3-pin XLR-plug or you can connect cables as following:

3-PIN TO 5-PIN CONVERSION CHART


Conductor	3 Pin Female (Output)	5 Pin Male (Input)
Ground/Shield	Pin 1	Pin 1
Data (-) signal	Pin 2	Pin 2
Data (+) signal	Pin 3	Pin 3
Not used		Pin 4
Not used		Pin 5

PART 3 Product Size

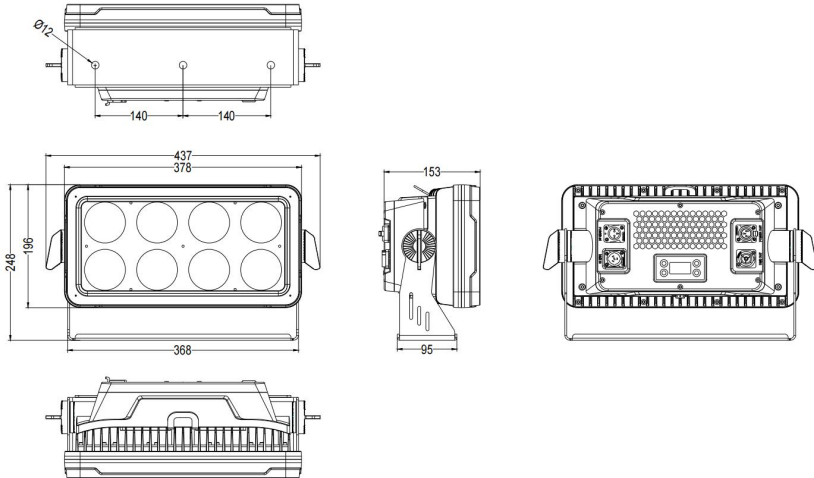

PART 4 Display Panel Operation

4.1 OLED Display panel menu instruction

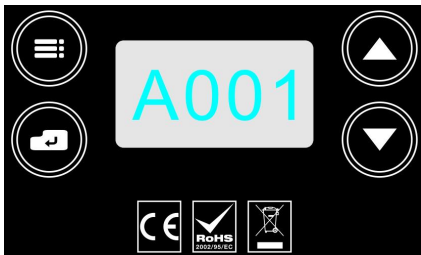

[MENU] menu selection or return to previous menu.

[UP] press [UP] through the menu list to increase/change the value of the

current function.

[DOWN] press [DOWN] through the menu list to decrease/change the value of the current function.

[ENTER] confirm & quit out current function setting.

4.2 Display panel operation instruction

Menu	Sub-Menu	Description
DMX Address	A.(001-512)	DMX address 001-512
Mode	Manual	Manual Mode
	2CH	2CH Mode
	4CH	4CH Mode
	6CH	6CH Mode
	16CH	16CH Mode
	20CH	20CH Mode
	Auto	Auto Mode
Warm	0-255	
Cold	0-255	
Dimmer	0-255	Dimmer,0-255
Strob	0-20	Strobe, 0-20, slow to fast
Auto prog	Flow 1	T.(00-99)
	Flow 2	T.(00-99)
	Flow 3	T.(00-99)
	Plus	T.(00-99)
	Strobe	T.(00-99)
Display INV	0	Display Positive
	180	Display Reverse
Display OFF	ON	Display keep ON
	30s	Display OFF after 30s no operation
	60s	Display OFF after 60s no operation
Keylock	Off/ON	

Reset	NO	No function
	YES	Parameter restore to factory value
Info	W8/v2.2	Software version

4.3 DMX Channel instruction

2 Channels Mode

Channel	Function	DMX Value	Description
1	Cool White	0-255	Cool White dimming,0-100%
2	Warm White	0-255	Warm White dimming,0-100%

4 Channels Mode

Channel	Function	DMX Value	Description
1	Dimmer	0-255	Dimmer,0-100%
2	Cool White	0-255	Cool White dimming,0-100%
3	Warm White	0-255	Warm White dimming,0-100%
4	Strobe	0-5	No function
		6-255	Strobe from slow to fast

6 Channels Mode

Channel	Function	DMX Value	Description
1	Dimmer	0-255	Dimmer,0-100%
2	Cool White	0-255	Cool White dimming,0-100%
3	Warm White	0-255	Warm White dimming,0-100%
4	Strobe	0-5	No function
		6-255	Strobe from slow to fast
5	Auto Mode	0-99	no function

		100-119	Auto-1
		120-139	Auto-2
		140-159	Auto-3
		160-179	Auto-4
		180-199	Auto-5
		200-255	no function
6	Auto Speed	0-255	White dimming,0-100%

16 Channels Mode

Channel	Function	DMX Value	Description
1	Cool White 1	0-255	Cool White dimming,0-100%
2	Warm White 1	0-255	Warm White dimming,0-100%
3	Cool White 2	0-255	Cool White dimming,0-100%
4	Warm White 2	0-255	Warm White dimming,0-100%
...	...	...	...
13	Cool White 7	0-255	Cool White dimming,0-100%
14	Warm White 7	0-255	Warm White dimming,0-100%
15	Cool White 8	0-255	Cool White dimming,0-100%
16	Warm White 8	0-255	Warm White dimming,0-100%

20 Channels Mode

Channel	Function	DMX Value	Description
1	Dimmer	0-255	Dimmer,0-100%
2	CW 1	0-255	Dimmer,0-100%
3	WW1	0-255	Dimmer,0-100%
4	CW 2	0-255	Dimmer,0-100%
5	WW 2	0-255	Dimmer,0-100%
...	...	...	...
16	CW 8	0-255	Dimmer,0-100%
17	WW 8	0-255	Dimmer,0-100%
18	Strobe	0-5	No function
		6-255	Strobe from slow to fast
19	Auto Mode	0-99	no function
		100-119	Auto-1
		120-139	Auto-2
		140-159	Auto-3
		160-179	Auto-4
		180-199	Auto-5
		200-255	no function
20	Auto Speed	0-255	White dimming,0-100%