



BLMO0760ZR

Light Source: **7×60W 4-in-1 lamp beads**

Lamp bead life: **50000H**

Light spot angle: **4.5° - 45°**

Waterproof grade: **IP65**



Main Features

High brightness zoom beam system

7 pcs 60W 4-in-1 LEDs

Powerful output with adjustable beam angle 4.5°–45°

RGB color mixing with dynamic effects

RGB color mixing with additional LED ring effect


Supports beam, vortex, and kaleidoscope effects

Professional control and outdoor design

DMX512, Auto, Master-Slave control modes

IP65 waterproof with durable magnesium alloy housing

Technical Specifications

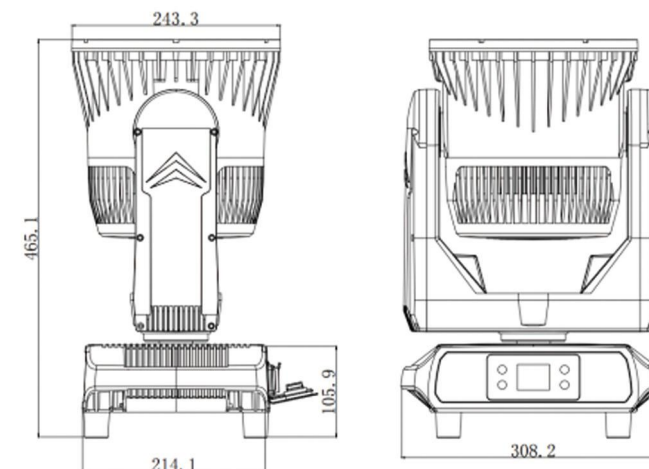

Light Source

- Light Source: 7 × 60W 4-in-1 LEDs
- LED Ring: 56 × 0.2W 5050 RGB LEDs
- High brightness output with rich color mixing

Optical System

- Zoom range: 4.5° – 45°
- Powerful beam with sharp and uniform output
- Excellent color mixing and dynamic effects

Control

- Control Modes: DMX512, Auto, Master-Slave
- Multiple channel modes:
15CH/24CH/30CH/37CH/53CH/81CH/95CH/30BCH/58CH
- Individual LED control for creative programming

Electrical and Connectors

- Input Voltage: AC100–240V, 50–60Hz
- Power Consumption: 500W
- Power connector: Powercon input/output
- Signal connection: XLR 3-pin input/output

Physical Information

- Product Dimensions: L304 × W218 × H463 mm
- Net Weight: 12.2 kg
- Housing: Magnesium alloy, durable and reliable

Work Environment

- IP65 waterproof rating for outdoor applications
- Stable performance under various environments
- Efficient cooling with temperature control and overheat protection

Installation

- Suitable for stage, event, and outdoor lighting
- Flexible installation: truss mounting or floor installation

Photometric (Images)

