

FAST RECOVERY RECTIFIER

FEATURES

- Low cost construction
- Fast switching for high efficiency.
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
260°C/10 seconds/0.375" (9.5mm) lead length
at 5 lbs (2,3kg) tension


MECHANICAL DATA

- **Case:** Transfer molded plastic
- **Epoxy:** UL94V-0 rate flame retardant
- **Polarity:** Color band denotes cathode end
- **Lead:** Plated axial lead, solderable per MIL-STD-202E method 208C
- **Mounting position:** Any
- **Weight:** 0.012 ounce, 0.33 gram

VOLTAGE RANGE
CURRENT

50 to 1000 Volts
1.0 Ampere

DO-41

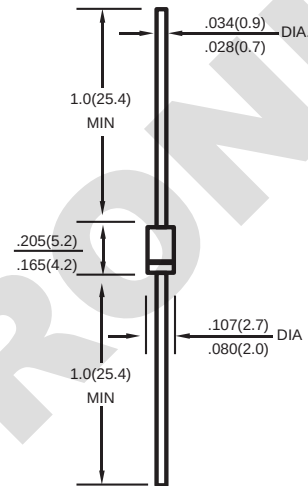

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load derate current by 20%.

		SYMBOLS	FR 101	FR 102	FR 103	FR 104	FR 105	FR 106	FR 107	UNITS
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current 0.375" (9.5mm) lead length at T _A =75°C		I _(AV)	1.0							Amp
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)		I _{FSM}	30							Amps
Maximum Instantaneous Forward Voltage at 1.0A		V _F	1.3							Volts
Maximum DC Reverse Current at rated DC blocking voltage	T _A =25°C	I _R	5.0							μAmps
	T _A =100°C		100							
Maximum Reverse Recovery Time(NOTE3) T _J =25°C		t _{rr}	150				250	500	nS	
Typical Junction Capacitance(NOTE1)		C _J	15							pF
Typical Thermal Resistance(NOTE2)		R _{θJA}	50							°C/W
Operating and Storage Temperature Range		T _J , T _{STG}	-65 to +150							°C

NOTES:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.
2. Thermal Resistance from Junction to Ambient at 0.375" (9.5mm) lead length, P.C. board mounted.
3. Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $t_{rr}=0.25\text{A}$.

FIG.1-TYPICAL FORWARD CURRENT
DERATING CURVE

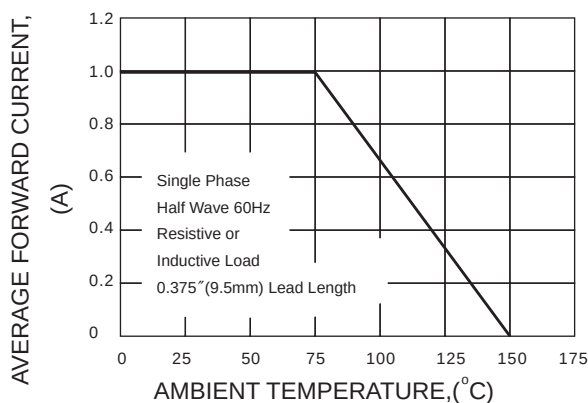


FIG.2-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT

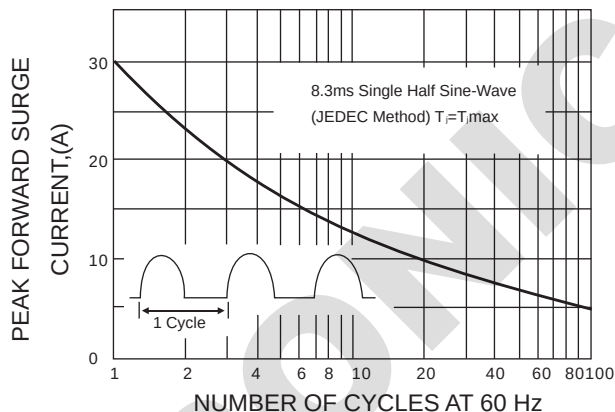


FIG.3-TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTICS

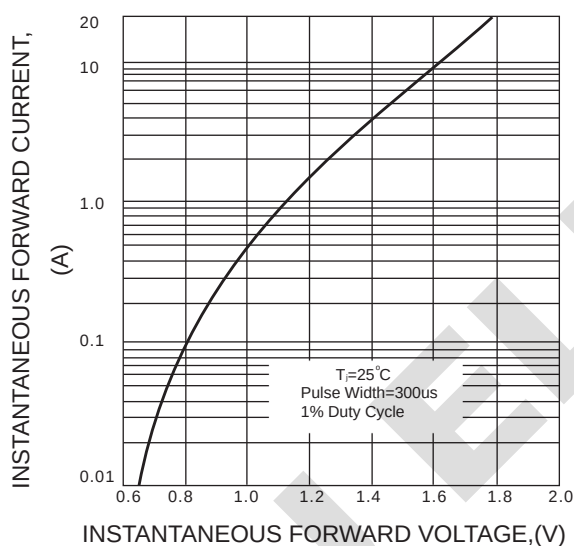


FIG.4-TYPICAL REVERSE
CHARACTERISTICS

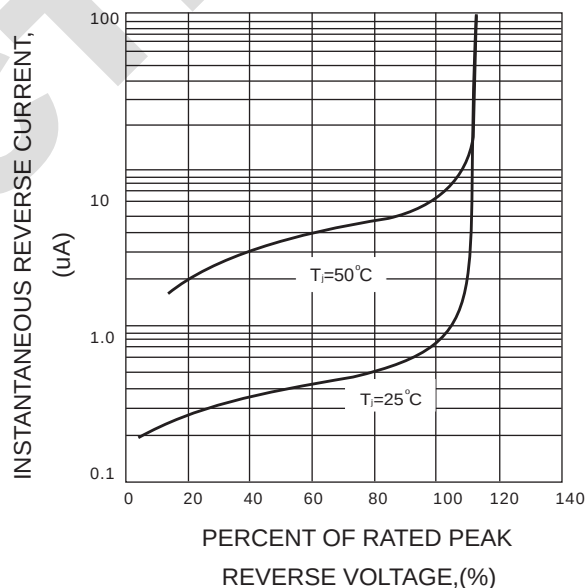


FIG.5-TYPICAL JUNCTION CAPACITANCE

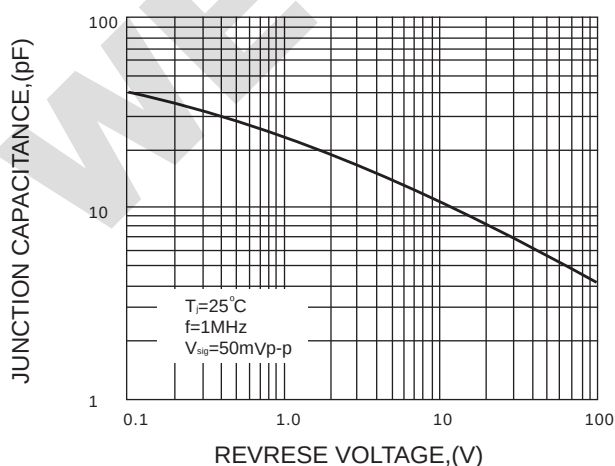


FIG.6-TEST CIRCUIT DIAGRAM AND
REVERSE RECOVERY TIME CHARACTERISTIC

