


LED Flush Mount



Line Drawing

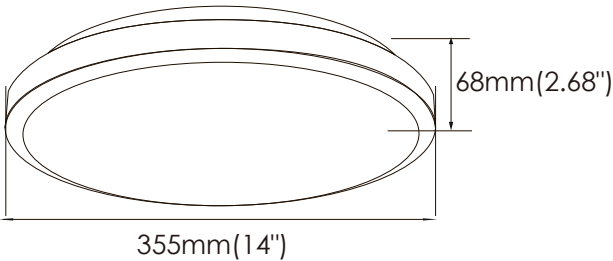

Specification

Size	Wattage	1CCT	CRI	Dim	Voltage	Certification
14inch	15W	3000K	80	Triac-Dim	120V	ETL/CETL

Driver Solution

- ETL/CETL Listed UL1598
- Voltage 120V
- Wide Temperature range(TC) from 140°F to +185°F

Gernal Specifications

Hz	60
Input PF	0.8
Max Efficiency	75-80lm/W
Dim mode	Dimmable 100%-10%
CRI	80
Turn on time	<0.5s
Chassic	Steel
Diffuser	PS
LED Model NO.	2835
USE	Damp Rated

Application

TRIAC
DIMMABLE
100%-10%

Compatible Models of Dimmable Switches
LEVITON Illuma Tech IPL06-10Z / Sure Slide 6672-1LW
LUTRON Ariadni CL TGCL-153P / Maestro CL MACL-153M

Finished



Installation

