
LED Flush Mount



Line Drawing

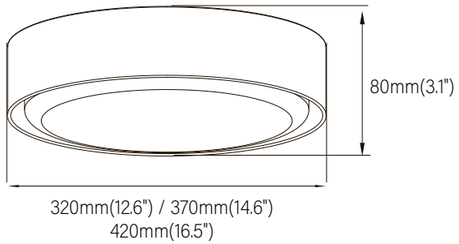

Specification

Size	Wattage	5CCT	CRI	Dim	Voltage	Certification
13inch	15W	27/30/35/40/5000K	80	Triac-Dim	120V	ETL/CETL
15inch	22W	27/30/35/40/5000K	80	Triac-Dim	120V	ETL/CETL
17inch	35W	27/30/35/40/5000K	80	Triac-Dim	120V	ETL/CETL

Driver Solution

· ETL/CETL Listed UL1598

· Voltage 120V

· Wide Temperature range(TC) from 140°F to +185°F


Finished

Black

Gerneral Specifications

Hz	60
Input PF	0.8
Max Effiency	75-80lm/W
Dim mode	Dimmable 100%-10%
CRI	80
Turn on time	<0.5s
Chassic	Steel
Diffuser	PC
LED Model NO.	2835
USE	Damp Rated

Installation

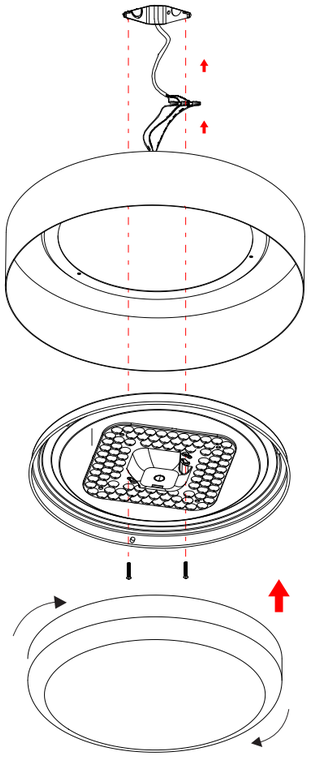

Application



