LED Flush Mount



Line Drawing

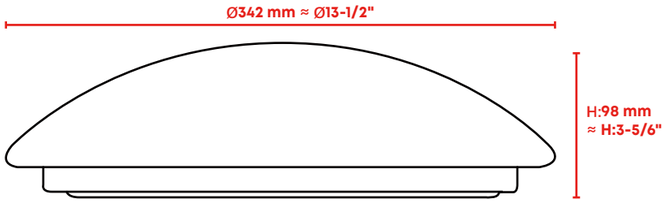

Specification

Size	Wattage	5CCT	CRI	Dim	Voltage	Certification
14inch	22W	27/30/35/40/5000K	80	Triac-Dim	120V	ETL/CETL
14inch	25W	27/30/35/40/5000K	80	Triac-Dim	120V	ETL/CETL

Driver Solution

- ETL/CETL Listed UL1598
- Voltage 120V
- Wide Temperature range(TC) from 140°F to +185°F

Finished

WH

Gerneral Specifications

Hz	60
Input PF	0.8
Max Effiency	75-80lm/W
Dim mode	Dimmable 100%-10%
CRI	80
Turn on time	<0.5s
Chassic	Steel
Diffuser	PS
LED Model NO.	2835
USE	Damp Rated

Installation

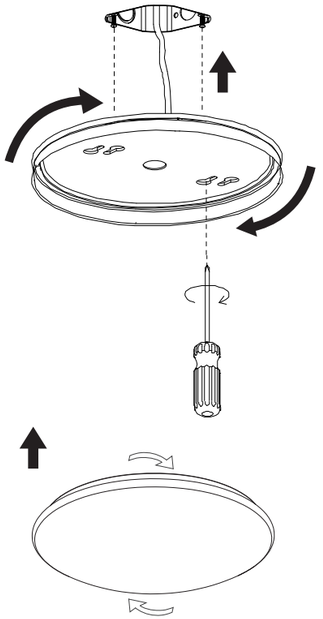

Application



Compatible Models of Dimmable Switches

LEVITON Illuma Tech IPL06-10Z / Sure Slide 6672-1LW

LUTRON Ariadni CL TGCL-153P / Maestro CL MACL-153M