

Oval LED Flush Mount



Line Drawing

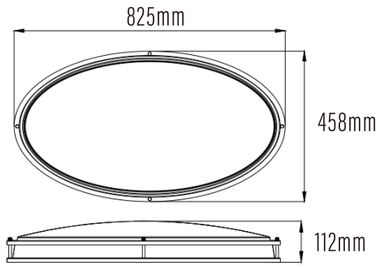

Luminous intensity distribution diagram

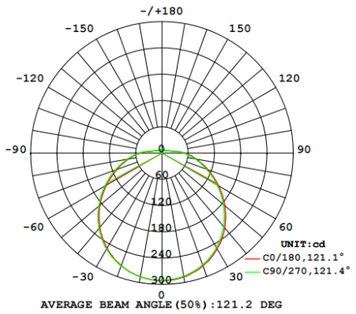

Finished

Brushed Nickel Black

Specification

Size	Wattage	5CCT	CRI	Dim	Voltage	Certification
24inch	35W	27K/30K/35K/40K/5000K	80	Triac-dim	120V	ETL/CETL
32inch	42W	27K/30K/35K/40K/5000K	80	Triac-dim	120V	ETL/CETL

Driver Solution LED Flush Mounts


- cETLus Listed 1598
- Isolated power supply
- Voltage 100-277V
- Long Life-time:>50,000 hours
- Wide temperature range(Tc) from -40°C to +85°C

Gerneral Specifications

Input Voltage / Frequency	100-277V
Input PF	0.90
Max Effiency	85LM/W
Dim mode	Triac or 0-10V Option
CRI	80/90
Turn on time	<0.5S
Chassic	Steel
Diffuser	PMMA
Operating Temperature Range	-25~45°C
LED model no.	2835 9V 1W
Use	Damp Rated
Warranty	5 Years

Installation

- Ceiling Mounted

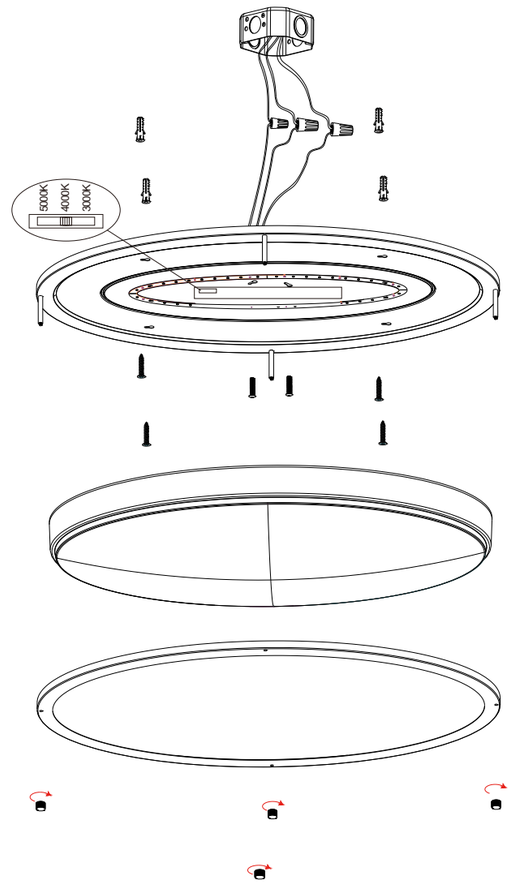

Application





