

LED Vanity Light

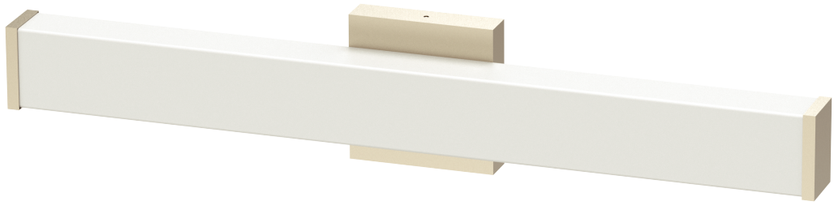

Line Drawing

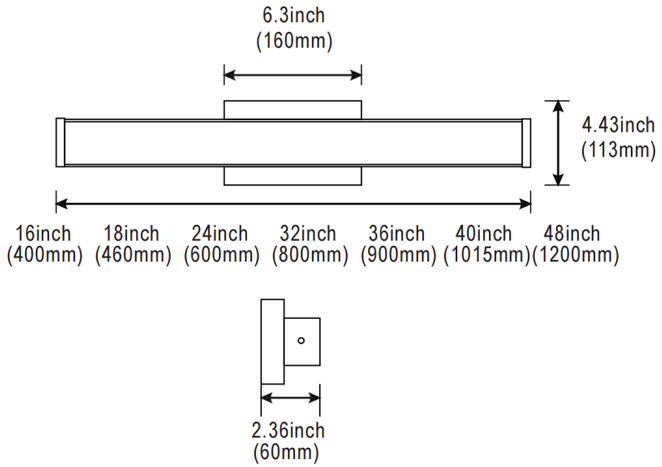

Specification

Size	Wattage	1CCT	Lumen	CRI	Dim	Voltage	Certification
16inch	18W	27K/30K/35K/40K/5000K	1400lm	80	Triac Dim	120V	ETL/CETL
18inch	20W	27K/30K/35K/40K/5000K	1600lm	80	Triac Dim	120V	ETL/CETL
24inch	25W	27K/30K/35K/40K/5000K	2000lm	80	Triac Dim	120V	ETL/CETL
32inch	30W	27K/30K/35K/40K/5000K	2400lm	80	Triac Dim	120V	ETL/CETL
36inch	30W	27K/30K/35K/40K/5000K	2400lm	80	Triac Dim	120V	ETL/CETL
40inch	35W	27K/30K/35K/40K/5000K	2800lm	80	Triac Dim	120V	ETL/CETL
48inch	35W	27K/30K/35K/40K/5000K	2800lm	80	Triac Dim	120V	ETL/CETL

Solution

- ETL/CETL Listed 1598
- Voltage 120V

Dimmer List

Lutron

- Illuma Tech IPL06-107
- Sure Slide 6672-1LM
- Decora DLS06-1LZ
- Ariadni CL TGCL-153P

Leviton

- Maestro CLMACL-153M
- Skylark Contour CTCL-153P
- Caseta PD-6WCL
- Sure Slide 6674-POW

Gerneral Specifications

Hz	60
Input PF	0.9
Max Effiency	75-80lm/W
Dim mode	Triac-Dimmable
CRI	80
Turn on time	<0.5s
Chassic	Steel
Diffuser	PMMA
LED Model NO.	2835
USE	Damp Rated

Finished

BN

Installation

