LED Flush Mount



Line Drawing

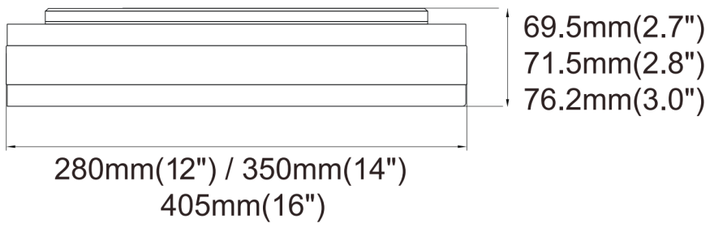

Finished

BK

Specification

Size	Wattage	5CCT	CRI	Dim	Voltage	Certification
12inch	15W	27K/30K/35K/40K/5000K	80	Triac-Dim	120V	ETL/CETL
14inch	25W	27K/30K/35K/40K/5000K	80	Triac-Dim	120V	ETL/CETL
16inch	25W	27K/30K/35K/40K/5000K	80	Triac-Dim	120V	ETL/CETL

Driver Solution

- ETL/CETL Listed UL1598
- Voltage 120V
- Wide Temperature range(TC) from 140°F to +185°F

Dimmer List

Lutron

- Illuma Tech IPL06-107
- Sure Slide 6672-1LM
- Decora DLS06-1LZ
- Ariadni CL TGCL-153P

Leviton

- Maestro CLMACL-153M
- Skylark Contour CTCL-153P
- Caseta PD-6WCL
- Sure Slide 6674-POW

Gerneral Specifications

Hz	60
Input PF	0.8
Max Effiency	75-80lm/W
Dim mode	Dimmable 100%-10%
CRI	80
Turn on time	<0.5s
Chassic	Steel
Diffuser	PS
LED Model NO.	2835
USE	Damp Rated

Installation

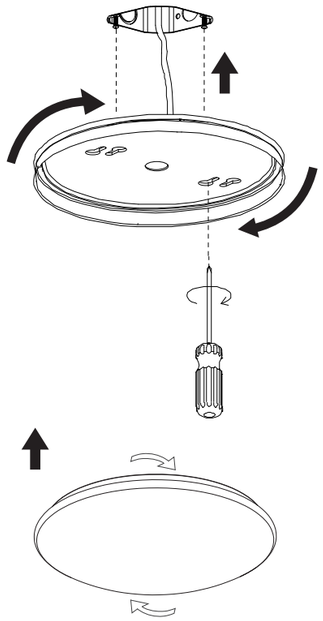

Application



