
# LED Wall Sconce with Emergency



## Line Drawing

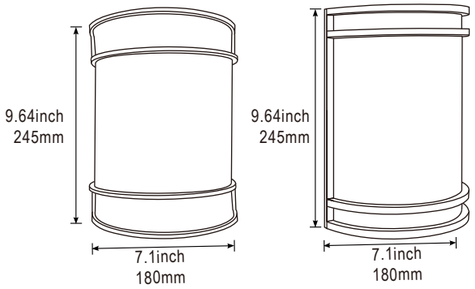


## Finished

- White
- Black
- BN

## Specification

| Size | Wattage | 3CCT | CRI | Dim | Voltage | Certification |
|---|---|---|---|---|---|---|
| 7inch | 15W | 3000K/4000K/5000K | 80 | Triac-Dim | 120V | ETL/CETL |

## Driver Solution

- ETL/CETL Listed 1598
- Voltage 120V
- Wide Temperature range(TC) from 140°F to +185°F


## Emergency

- Emergency Time 90 Mins
- Emergency Bulit-in Battery

## Gerneral Specifications

| | |
|---|---|
| Hz | 60 |
| Input PF | 0.8 |
| Max Effiency | 70lm/W |
| Dim mode | Triac-Dimmable 100%-10% |
| CRI | 80 |
| Turn on time | <0.5s |
| Chassic | Steel |
| Diffuser | PMMA |
| LED Model NO. | 2835 |
| USE | Damp Rated |

## Installation

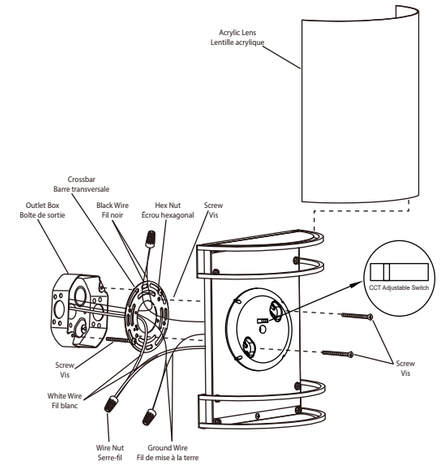


## Application



