
LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.2V I:0.1394A P:16.08W PF:0.9598 Lamp Flux:1136.44x1 lm		
NAME: 10寸壁灯BK-3CCT+应急	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: WORBEST	SUR.:	PROTECTION ANGLE:


DATA OF LAMP		PHOTOMETRIC DATA		Eff: 70.67 lm/W	
MODEL		Imax(cd)	347.4	S/MH(C0/180)	1.19
NOMINAL POWER(W)	16	LOR(%)	100.0	S/MH(C90/270)	1.30
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1136.4	η UP,DN(C0-180)	2.5,47.4
NOMINAL FLUX(lm)	1136.44	CIE CLASS	DIRECT	η UP,DN(C180-360)	2.5,47.6
LAMPS INSIDE	1	η up(%)	5.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.2	η down(%)	95.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

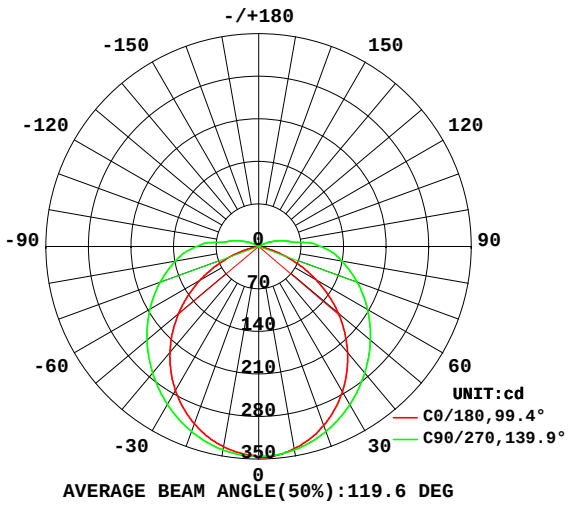

AVERAGE BEAM ANGLE(50%):119.6 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

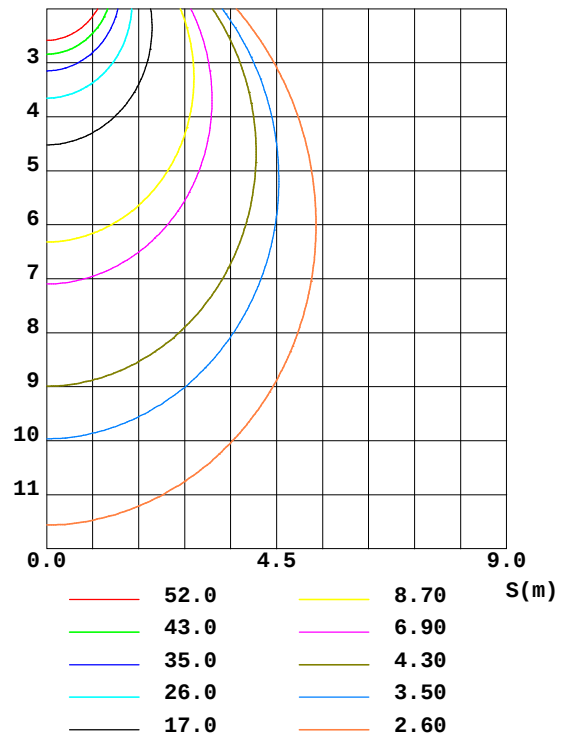

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
5	344.5	344.2	344.1	342.2	341.4	342.2	344.1	344.2	0- 5	8.233	8.233	0.72,0.72
10	338.1	338.7	339.6	336.3	334.7	336.3	339.6	338.7	5- 10	24.36	32.60	2.87,2.87
15	327.4	329.6	333.3	327.5	323.9	327.5	333.3	329.6	10- 15	39.55	72.14	6.35,6.35
20	313.2	317.8	323.6	315.9	310.2	315.9	323.6	317.8	15- 20	53.26	125.4	11,11
25	296.1	303.2	312.8	301.4	293.4	301.4	312.8	303.2	20- 25	65.06	190.5	16.8,16.8
30	275.9	286.2	300.3	285.0	273.9	285.0	300.3	286.2	25- 30	74.62	265.1	23.3,23.3
35	252.9	267.4	286.4	266.9	251.8	266.9	286.4	267.4	30- 35	81.70	346.8	30.5,30.5
40	227.7	247.0	271.6	247.2	227.4	247.2	271.6	247.0	35- 40	86.19	433.0	38.1,38.1
45	200.3	226.2	256.1	227.0	200.8	227.0	256.1	226.2	40- 45	88.05	521.0	45.8,45.8
50	171.2	204.7	240.1	206.2	172.7	206.2	240.1	204.7	45- 50	87.46	608.5	53.5,53.5
55	140.2	182.9	223.5	185.0	142.7	185.0	223.5	182.9	50- 55	84.48	693.0	61,61
60	108.4	160.8	206.8	163.9	112.0	163.9	206.8	160.8	55- 60	79.36	772.3	68,68
65	76.15	139.5	189.7	143.5	80.72	143.5	189.7	139.5	60- 65	72.43	844.8	74.3,74.3
70	44.87	119.0	172.5	123.7	50.61	123.7	172.5	119.0	65- 70	64.13	908.9	80,80
75	17.24	99.44	155.5	104.8	23.95	104.8	155.5	99.44	70- 75	55.04	963.9	84.8,84.8
80	0	80.93	139.3	86.71	0.8306	86.71	139.3	80.93	75- 80	45.76	1010	88.8,88.8
85	0	63.80	123.3	69.76	0	69.76	123.3	63.80	80- 85	38.20	1048	92.2,92.2
90	0	47.78	102.2	53.95	0	53.95	102.2	47.78	85- 90	31.49	1079	95,95
95	0	32.91	78.03	39.04	0	39.04	78.03	32.91	90- 95	24.47	1104	97.1,97.1
100	0	19.67	50.68	25.37	0	25.37	50.68	19.67	95-100	16.09	1120	98.6,98.6
105	0	0	36.93	2.172	0	2.172	36.93	0	100-105	8.755	1129	99.3,99.3
110	0	0	24.60	0	0	0	24.60	0	105-110	4.069	1133	99.7,99.7
115	0	0	13.99	0	0	0	13.99	0	110-115	2.447	1135	99.9,99.9
120	0	0	3.732	0	0	0	3.732	0	115-120	1.074	1136	100,100
125	0	0	0	0	0	0	0	0	120-125	0.0854	1136	100,100
130	0	0	0	0	0	0	0	0	125-130	0	1136	100,100
135	0	0	0	0	0	0	0	0	130-135	0	1136	100,100
140	0	0	0	0	0	0	0	0	135-140	0	1136	100,100
145	0	0	0	0	0	0	0	0	140-145	0	1136	100,100
150	0	0	0	0	0	0	0	0	145-150	0	1136	100,100
155	0	0	0	0	0	0	0	0	150-155	0	1136	100,100
160	0	0	0	0	0	0	0	0	155-160	0	1136	100,100
165	0	0	0	0	0	0	0	0	160-165	0	1136	100,100
170	0	0	0	0	0	0	0	0	165-170	0	1136	100,100
175	0	0	0	0	0	0	0	0	170-175	0	1136	100,100
180	0	0	0	0	0	0	0	0	175-180	0	1136	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79


CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.2V I:0.1394A P:16.08W PF:0.9598 Lamp Flux:1136.44x1 lm		
NAME: 10寸壁灯BK-3CCT+应急	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: WORBEST	SUR.:	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.08	1.08	1.08	1.03	1.03	1.03	.97	.97	.97	.95
1.0	.00	.95	.90	.97	.92	.88	.92	.88	.85	.87	.84	.81	.82	.80	.78	.75
2.0	.86	.79	.72	.84	.77	.71	.79	.73	.68	.75	.70	.66	.71	.67	.64	.61
3.0	.75	.66	.59	.73	.65	.58	.69	.62	.57	.66	.60	.55	.63	.58	.53	.51
4.0	.66	.57	.50	.65	.56	.49	.61	.54	.48	.58	.52	.47	.56	.50	.46	.43
5.0	.59	.50	.43	.58	.49	.42	.55	.47	.41	.52	.46	.40	.50	.44	.39	.37
6.0	.53	.44	.37	.52	.43	.37	.50	.42	.36	.47	.41	.35	.45	.39	.35	.32
7.0	.48	.39	.33	.47	.38	.32	.45	.37	.32	.43	.36	.31	.41	.35	.31	.29
8.0	.44	.35	.29	.43	.35	.29	.41	.34	.28	.40	.33	.28	.38	.32	.27	.25
9.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.36	.30	.25	.35	.29	.25	.23
10.0	.37	.29	.24	.36	.29	.23	.35	.28	.23	.34	.27	.23	.33	.27	.22	.21

LAMPS

LUMINAIRE BUDGETARY DIAGRAM

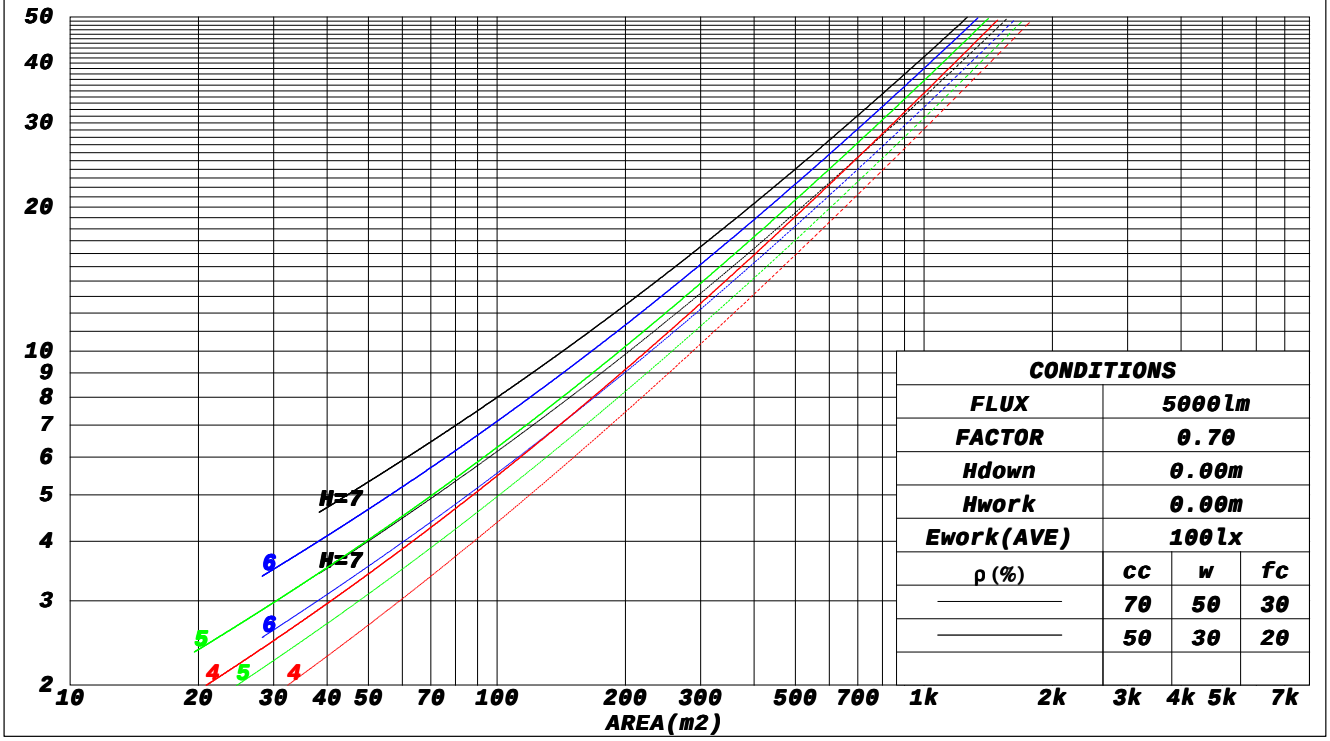

CONDITIONS			
FLUX	5000lm		
FACTOR	0.70		
Hdown	0.00m		
Hwork	0.00m		
Ework(AVE)	100lx		
ρ(%)	cc	w	fc
———	70	50	30
———	50	30	20

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79

WEC AND CCEC

Test:U:120.2V I:0.1394A P:16.08W PF:0.9598 Lamp Flux:1136.44x1 lm		
NAME: 10寸壁灯BK-3CCT+应急	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: WORBEST	SUR.:	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Wall Exitance Coeffcients(WEC)												
0.0																
1.0	.364	.207	.066	.355	.203	.064	.339	.194	.062	.324	.187	.060	.310	.180	.058	
2.0	.322	.176	.054	.314	.173	.053	.300	.167	.052	.286	.160	.050	.274	.155	.049	
3.0	.289	.154	.046	.282	.151	.046	.269	.146	.044	.257	.141	.043	.246	.136	.042	
4.0	.262	.136	.040	.256	.134	.040	.244	.130	.039	.234	.125	.038	.224	.121	.037	
5.0	.240	.122	.035	.234	.120	.035	.224	.116	.034	.214	.113	.034	.205	.109	.033	
6.0	.220	.111	.032	.215	.109	.031	.206	.106	.031	.197	.103	.030	.189	.100	.030	
7.0	.204	.101	.029	.199	.099	.028	.191	.097	.028	.183	.094	.027	.176	.091	.027	
8.0	.190	.093	.026	.186	.091	.026	.178	.089	.025	.171	.086	.025	.164	.084	.025	
9.0	.177	.086	.024	.173	.085	.024	.166	.082	.023	.160	.080	.023	.154	.078	.023	
10.0	.166	.080	.022	.163	.079	.022	.156	.077	.022	.150	.075	.021	.145	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.229	.229	.229	.195	.195	.195	.133	.133	.133	.077	.077	.077	.025	.025	.025	
1.0	.223	.194	.169	.190	.167	.145	.130	.115	.100	.075	.066	.058	.024	.021	.019	
2.0	.215	.171	.133	.184	.147	.115	.126	.102	.080	.073	.059	.047	.023	.019	.015	
3.0	.207	.153	.111	.178	.132	.096	.122	.092	.067	.070	.054	.040	.023	.017	.013	
4.0	.199	.140	.096	.171	.121	.083	.118	.085	.058	.068	.050	.035	.022	.016	.011	
5.0	.191	.130	.085	.164	.113	.074	.113	.079	.052	.066	.046	.031	.021	.015	.010	
6.0	.184	.122	.078	.158	.106	.068	.109	.074	.048	.063	.044	.028	.020	.014	.009	
7.0	.177	.115	.072	.152	.100	.063	.105	.070	.044	.061	.041	.026	.020	.014	.009	
8.0	.170	.109	.068	.146	.095	.059	.101	.067	.042	.059	.039	.025	.019	.013	.008	
9.0	.164	.105	.064	.141	.091	.056	.098	.064	.040	.057	.038	.024	.018	.012	.008	
10.0	.158	.100	.062	.136	.087	.054	.094	.061	.038	.055	.036	.023	.018	.012	.008	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79

Uncorrected UGR Table

Test:U:120.2V I:0.1394A P:16.08W PF:0.9598 Lamp Flux:1136.44x1 lm		
NAME: 10寸壁灯BK-3CCT+应急	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: WORBEST	SUR.:	PROTECTION ANGLE:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.3	16.8	15.7	17.1	17.5	17.4	18.9	17.8	19.2	19.5
3H	16.3	17.7	16.7	18.0	18.4	19.9	21.3	20.3	21.6	22.0
4H	16.5	17.8	16.9	18.2	18.5	21.3	22.6	21.6	22.9	23.3
6H	16.5	17.7	16.9	18.1	18.5	22.8	24.0	23.2	24.4	24.8
8H	16.4	17.7	16.8	18.0	18.4	23.6	24.8	24.0	25.2	25.6
12H	16.4	17.6	16.8	18.0	18.4	24.6	25.8	25.0	26.1	26.6
4H 2H	16.3	17.7	16.7	18.0	18.4	17.9	19.3	18.3	19.6	20.0
3H	17.6	18.8	18.1	19.2	19.6	20.6	21.8	21.0	22.2	22.6
4H	18.1	19.1	18.5	19.6	20.0	22.1	23.2	22.6	23.6	24.1
6H	18.2	19.2	18.7	19.6	20.1	23.8	24.8	24.3	25.3	25.7
8H	18.3	19.2	18.7	19.6	20.1	24.8	25.7	25.3	26.2	26.7
12H	18.3	19.1	18.8	19.6	20.1	25.9	26.8	26.5	27.3	27.8
8H 4H	19.1	20.0	19.5	20.4	20.9	22.4	23.3	22.9	23.8	24.3
6H	19.6	20.4	20.1	20.9	21.4	24.4	25.1	24.9	25.6	26.2
8H	19.8	20.5	20.4	21.0	21.6	25.5	26.2	26.1	26.7	27.3
12H	20.0	20.6	20.6	21.2	21.8	26.9	27.5	27.4	28.0	28.6
12H 4H	19.4	20.2	19.9	20.7	21.2	22.4	23.2	22.9	23.7	24.2
6H	20.2	20.9	20.7	21.4	21.9	24.4	25.1	25.0	25.6	26.2
8H	20.6	21.2	21.1	21.7	22.3	25.7	26.3	26.2	26.8	27.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				

CIE Pub.117 Corrected 1136 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.4)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79

UTILIZATION FACTORS TABLE

Test:U:120.2V I:0.1394A P:16.08W PF:0.9598 Lamp Flux:1136.44x1 lm		
NAME: 10寸壁灯BK-3CCT+应急	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: WORBEST	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	54	42	34	53	41	34	52	41	34	28
0.80	63	51	43	62	50	43	60	49	42	35
1.00	71	59	51	70	58	51	67	60	50	43
1.25	78	66	58	76	66	58	73	64	57	49
1.50	83	72	64	81	71	63	78	69	62	54
2.00	90	80	72	88	79	72	84	76	70	61
2.50	94	85	78	92	83	77	87	80	75	65
3.00	98	89	83	95	88	81	90	84	79	69
4.00	102	95	89	99	93	88	94	89	84	74
5.00	105	99	93	102	96	92	97	92	88	77
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79

ISOCANDELA DIAGRAM

Test:U:120.2V I:0.1394A P:16.08W PF:0.9598 Lamp Flux:1136.44x1 lm		
NAME: 10寸壁灯BK-3CCT+应急	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: WORBEST	SUR.:	PROTECTION ANGLE:

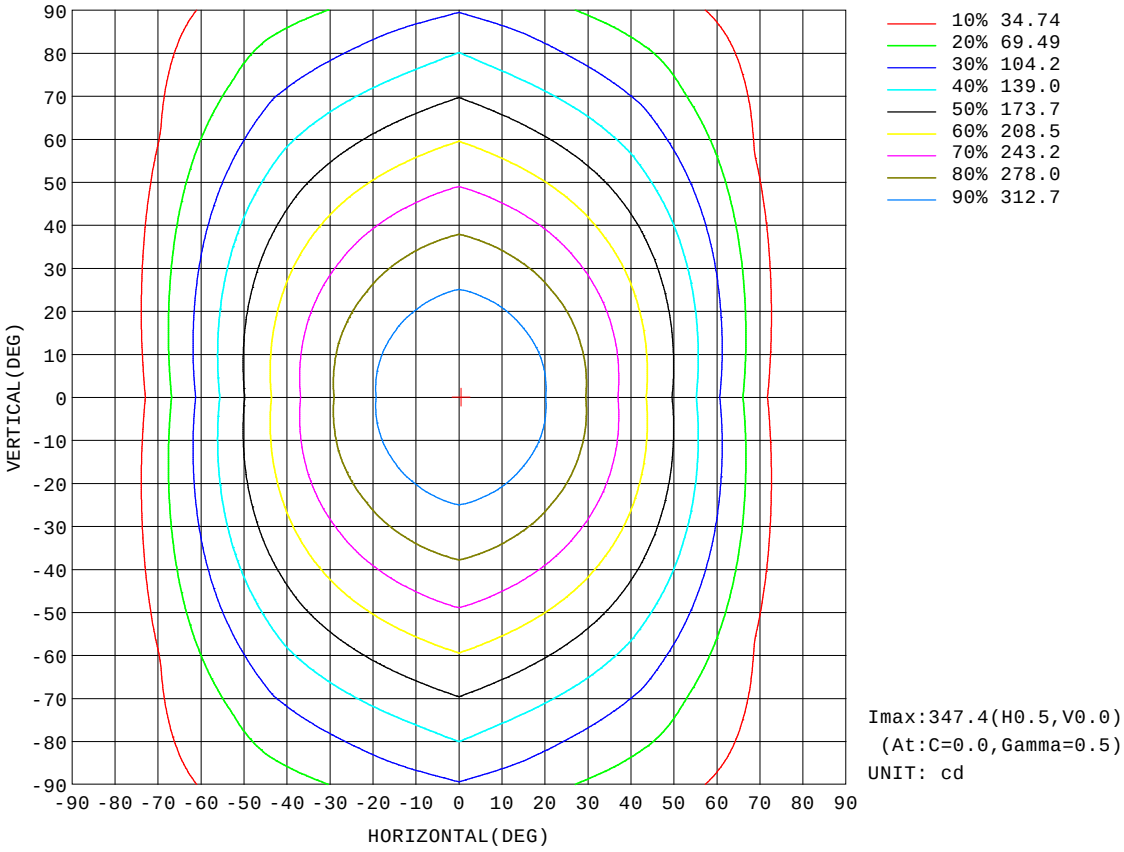


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79

AAI CURVES

Test:U:120.2V I:0.1394A P:16.08W PF:0.9598 Lamp Flux:1136.44x1 lm		
NAME: 10寸壁灯BK-3CCT+应急	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: WORBEST	SUR.:	PROTECTION ANGLE:

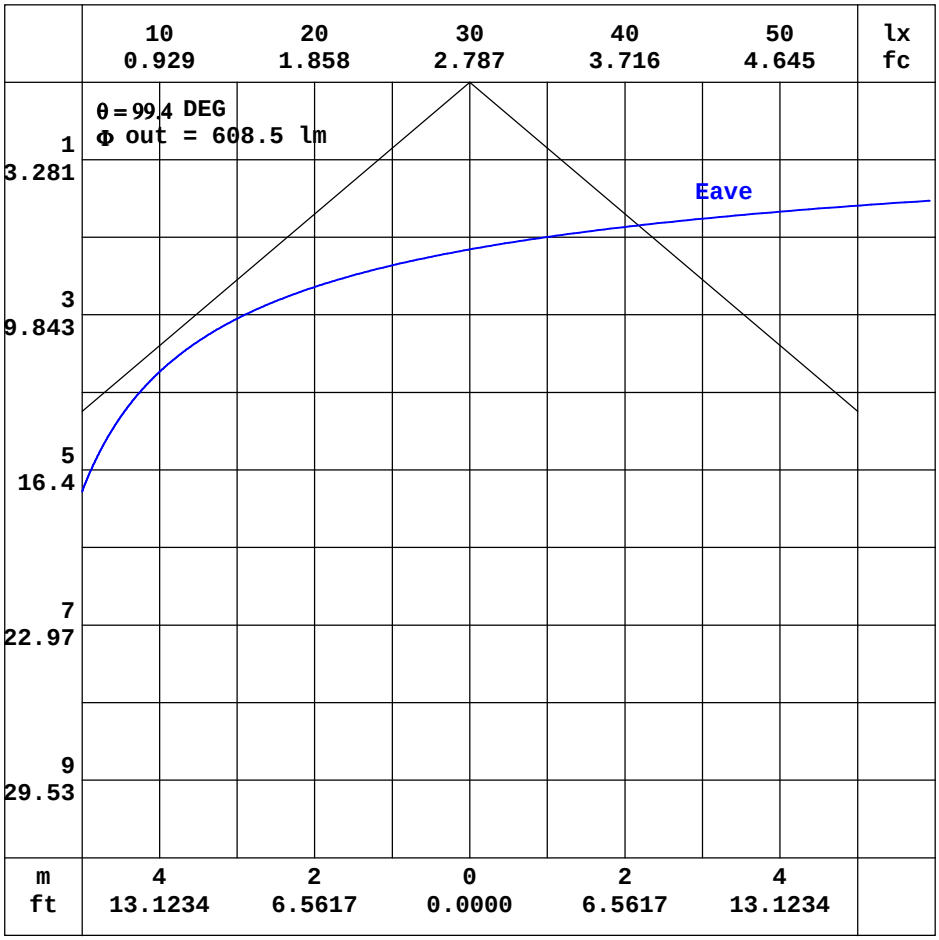


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79

ISOLUX DIAGRAM


Test:U:120.2V I:0.1394A P:16.08W PF:0.9598 Lamp Flux:1136.44x1 lm		
NAME: 10寸壁灯BK-3CCT+应急	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: WORBEST	SUR.:	PROTECTION ANGLE:

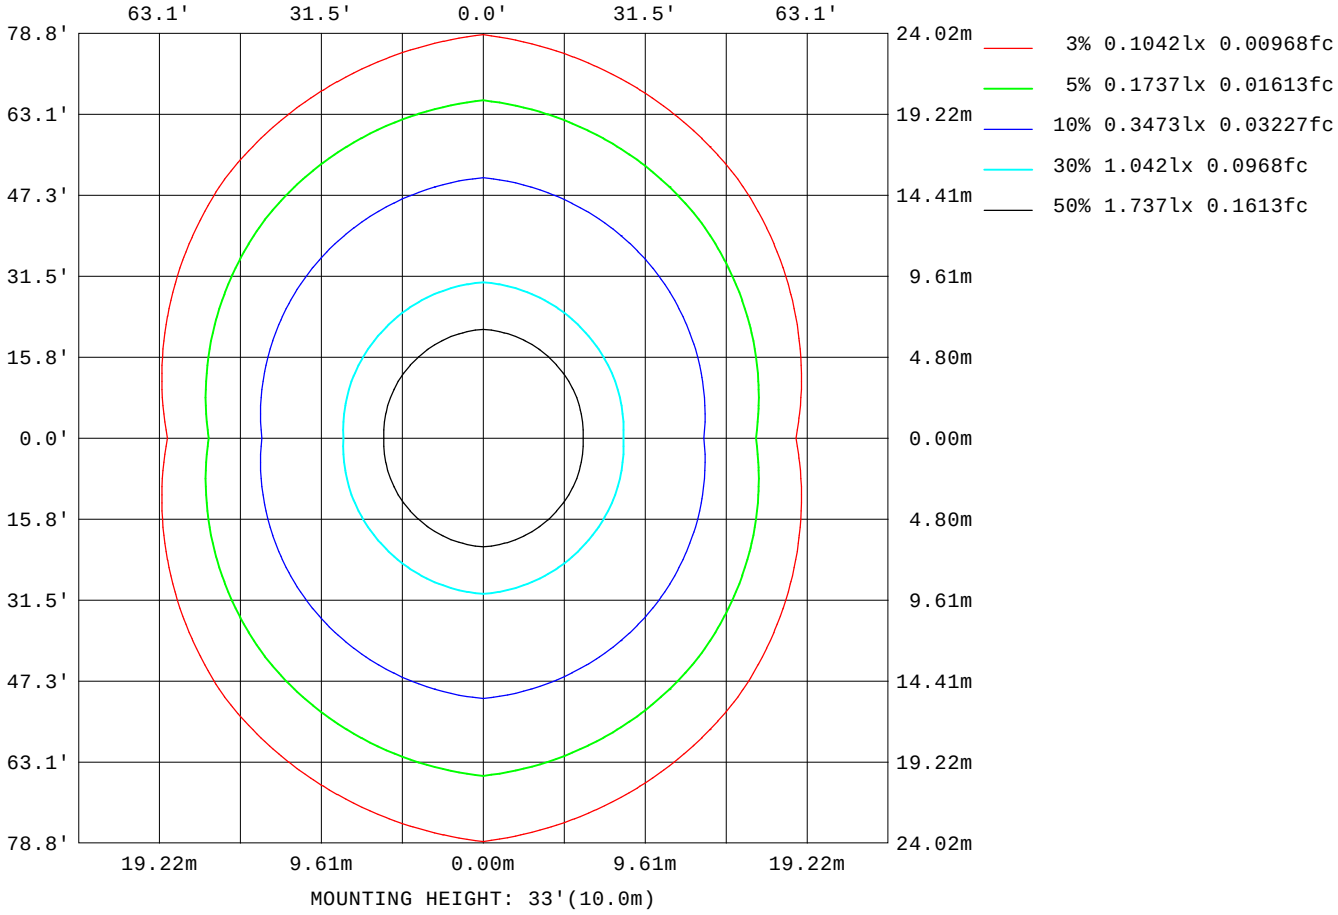

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79

Planar Illuminance Curve

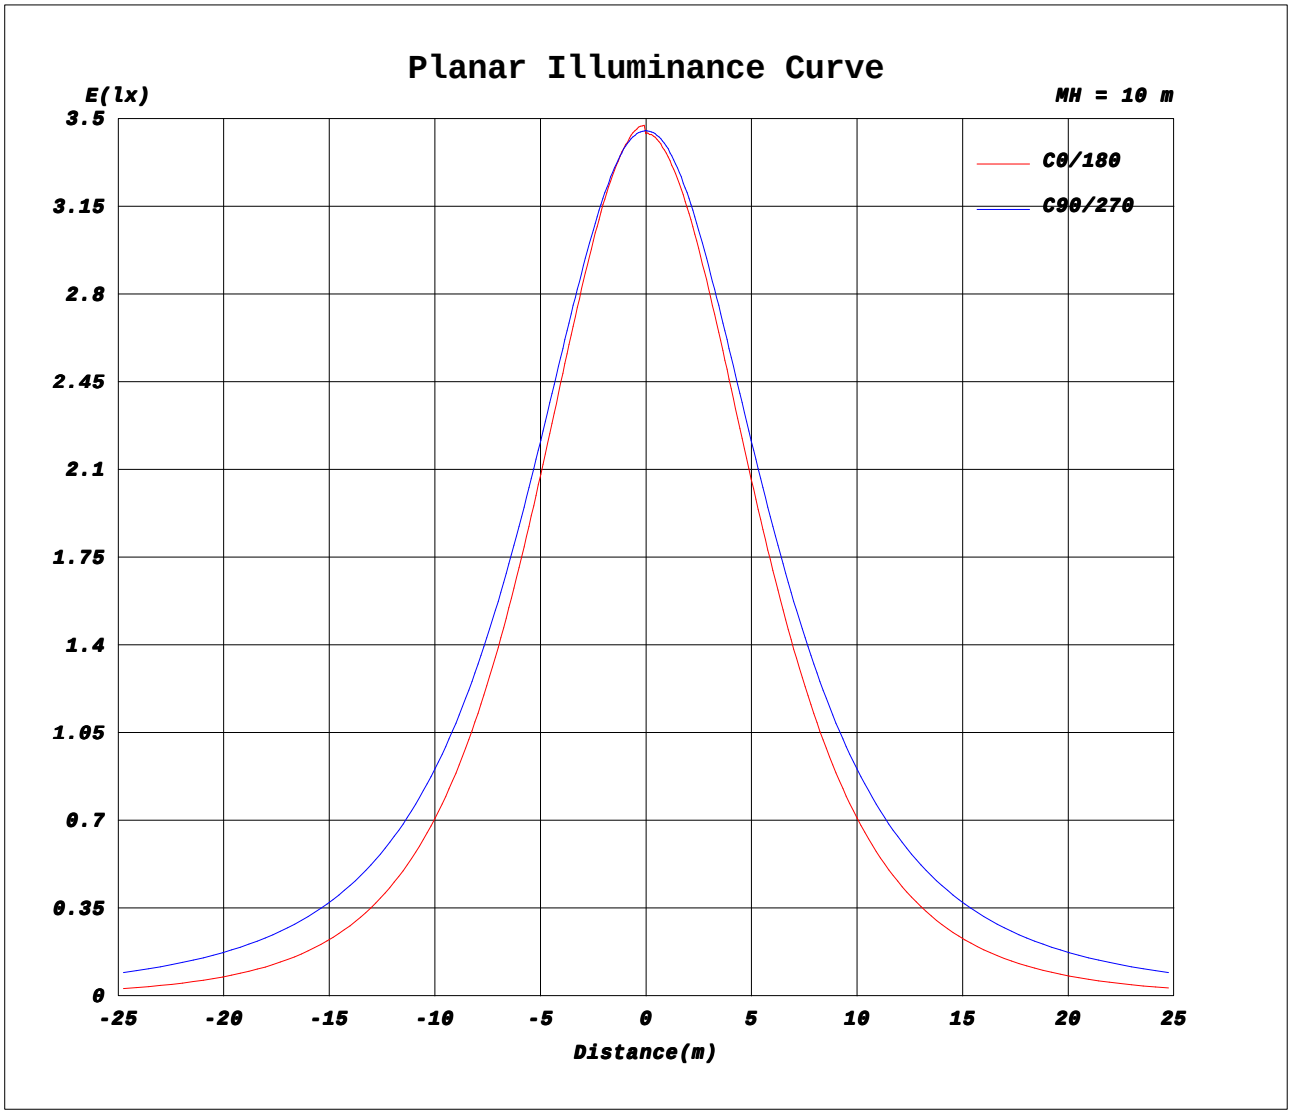

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.1394A P:16.08W PF:0.9598 Lamp Flux:1136.44x1 lm		
NAME: 10寸壁灯BK-3CCT+应急	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: WORBEST	SUR.:	PROTECTION ANGLE:

Table--1 UNIT: cd

γ (DEG) \ C(DEG)	0	45	90	135	180	225	270	315
0	347	345	345	344	344	344	345	345
5	344	344	344	342	341	342	344	344
10	338	339	340	336	335	336	340	339
15	327	330	333	328	324	328	333	330
20	313	318	324	316	310	316	324	318
25	296	303	313	301	293	301	313	303
30	276	286	300	285	274	285	300	286
35	253	267	286	267	252	267	286	267
40	228	247	272	247	227	247	272	247
45	200	226	256	227	201	227	256	226
50	171	205	240	206	173	206	240	205
55	140	183	224	185	143	185	224	183
60	108	161	207	164	112	164	207	161
65	76.1	140	190	144	80.7	144	190	140
70	44.9	119	173	124	50.6	124	173	119
75	17.2	99.4	156	105	23.9	105	156	99.4
80	0.00	80.9	139	86.7	0.83	86.7	139	80.9
85	0.00	63.8	123	69.8	0.00	69.8	123	63.8
90	0.00	47.8	102	54.0	0.00	54.0	102	47.8
95	0.00	32.9	78.0	39.0	0.00	39.0	78.0	32.9
100	0.00	19.7	50.7	25.4	0.00	25.4	50.7	19.7
105	0.00	0.00	36.9	2.17	0.00	2.17	36.9	0.00
110	0.00	0.00	24.6	0.00	0.00	0.00	24.6	0.00
115	0.00	0.00	14.0	0.00	0.00	0.00	14.0	0.00
120	0.00	0.00	3.73	0.00	0.00	0.00	3.73	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79