
LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.1V I:0.1378A P:15.89W PF:0.9601 Lamp Flux:1184.39x1 lm		
NAME: 10寸壁灯BK-3CCT+应急	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: WORBEST	SUR.:	PROTECTION ANGLE:


DATA OF LAMP		PHOTOMETRIC DATA		Eff: 74.52 lm/W	
MODEL		Imax(cd)	357.8	S/MH(C0/180)	1.20
NOMINAL POWER(W)	16	LOR(%)	100.0	S/MH(C90/270)	1.30
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1184.4	η UP,DN(C0-180)	2.6,47.3
NOMINAL FLUX(lm)	1184.39	CIE CLASS	DIRECT	η UP,DN(C180-360)	2.6,47.4
LAMPS INSIDE	1	η up(%)	5.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.1	η down(%)	94.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

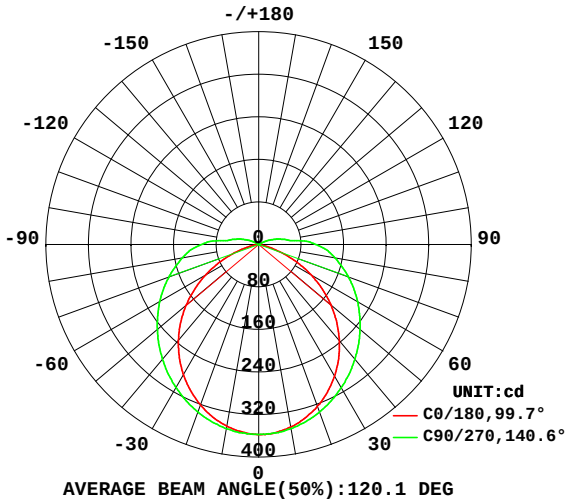

AVERAGE BEAM ANGLE(50%):120.1 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

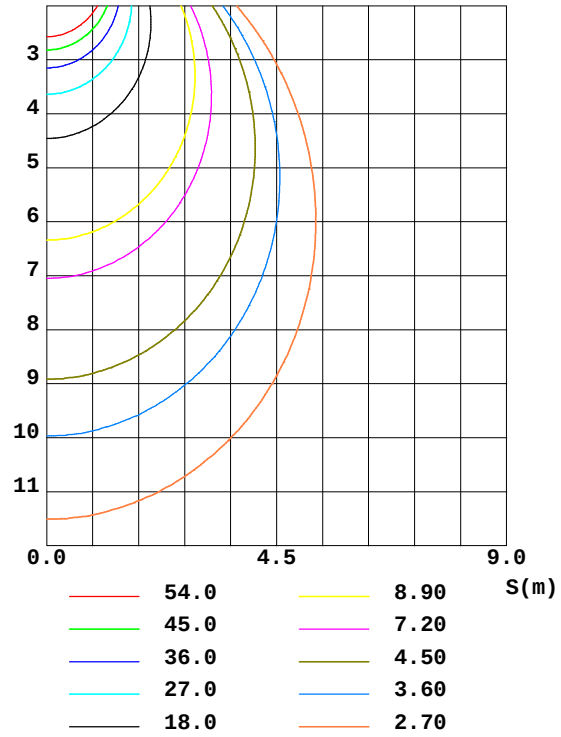

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
5	355.5	355.8	355.7	354.7	354.1	354.7	355.7	355.8	0- 5	8.519	8.519	0.72,0.72
10	348.3	350.2	351.3	348.4	346.7	348.4	351.3	350.2	5- 10	25.22	33.73	2.85,2.85
15	337.9	341.0	344.8	339.4	335.8	339.4	344.8	341.0	10- 15	40.93	74.66	6.3,6.3
20	323.6	329.1	335.4	326.8	320.9	326.8	335.4	329.1	15- 20	55.13	129.8	11,11
25	306.3	314.3	324.0	312.0	303.2	312.0	324.0	314.3	20- 25	67.34	197.1	16.6,16.6
30	285.6	297.1	311.0	294.6	283.0	294.6	311.0	297.1	25- 30	77.25	274.4	23.2,23.2
35	262.3	277.7	296.9	276.0	260.4	276.0	296.9	277.7	30- 35	84.62	359.0	30.3,30.3
40	236.0	257.1	281.7	255.5	235.1	255.5	281.7	257.1	35- 40	89.31	448.3	37.9,37.9
45	207.9	235.3	265.7	234.6	207.6	234.6	265.7	235.3	40- 45	91.33	539.6	45.6,45.6
50	177.7	213.5	248.9	213.3	178.3	213.3	248.9	213.5	45- 50	90.75	630.4	53.2,53.2
55	145.7	191.0	232.0	191.4	147.5	191.4	232.0	191.0	50- 55	87.73	718.1	60.6,60.6
60	112.8	168.5	214.8	169.8	115.8	169.8	214.8	168.5	55- 60	82.48	800.6	67.6,67.6
65	79.47	146.8	197.4	148.8	83.82	148.8	197.4	146.8	60- 65	75.42	876.0	74,74
70	47.07	125.6	179.7	128.5	52.94	128.5	179.7	125.6	65- 70	66.94	943.0	79.6,79.6
75	18.47	105.5	162.5	109.1	25.65	109.1	162.5	105.5	70- 75	57.61	1001	84.5,84.5
80	0	86.56	145.9	90.41	1.821	90.41	145.9	86.56	75- 80	48.09	1049	88.5,88.5
85	0	68.90	129.4	72.86	0	72.86	129.4	68.90	80- 85	40.34	1089	91.9,91.9
90	0	52.58	107.4	56.40	0	56.40	107.4	52.58	85- 90	33.34	1122	94.8,94.8
95	0	37.30	82.00	40.90	0	40.90	82.00	37.30	90- 95	26.07	1148	97,97
100	0	23.48	53.51	26.22	0	26.22	53.51	23.48	95-100	17.29	1166	98.4,98.4
105	0	1.394	39.74	0.7139	0	0.7139	39.74	1.394	100-105	9.960	1176	99.3,99.3
110	0	0	27.45	0	0	0	27.45	0	105-110	4.422	1180	99.6,99.6
115	0	0	16.44	0	0	0	16.44	0	110-115	2.788	1183	99.9,99.9
120	0	0	5.659	0	0	0	5.659	0	115-120	1.337	1184	100,100
125	0	0	0	0	0	0	0	0	120-125	0.1870	1184	100,100
130	0	0	0	0	0	0	0	0	125-130	0	1184	100,100
135	0	0	0	0	0	0	0	0	130-135	0	1184	100,100
140	0	0	0	0	0	0	0	0	135-140	0	1184	100,100
145	0	0	0	0	0	0	0	0	140-145	0	1184	100,100
150	0	0	0	0	0	0	0	0	145-150	0	1184	100,100
155	0	0	0	0	0	0	0	0	150-155	0	1184	100,100
160	0	0	0	0	0	0	0	0	155-160	0	1184	100,100
165	0	0	0	0	0	0	0	0	160-165	0	1184	100,100
170	0	0	0	0	0	0	0	0	165-170	0	1184	100,100
175	0	0	0	0	0	0	0	0	170-175	0	1184	100,100
180	0	0	0	0	0	0	0	0	175-180	0	1184	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79


CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.1378A P:15.89W PF:0.9601 Lamp Flux:1184.39x1 lm		
NAME: 10寸壁灯BK-3CCT+应急	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: WORBEST	SUR.:	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.18	1.18	1.18	1.14	1.14	1.14	1.08	1.08	1.08	1.02	1.02	1.02	.97	.97	.97	.95
1.0	.00	.95	.90	.97	.92	.88	.92	.88	.84	.87	.84	.81	.82	.80	.77	.75
2.0	.86	.78	.72	.84	.77	.71	.79	.73	.68	.75	.70	.66	.71	.67	.64	.61
3.0	.75	.66	.59	.73	.65	.58	.69	.62	.57	.66	.60	.55	.62	.57	.53	.51
4.0	.66	.57	.50	.64	.56	.49	.61	.54	.48	.58	.52	.47	.55	.50	.45	.43
5.0	.59	.50	.43	.58	.49	.42	.55	.47	.41	.52	.45	.40	.50	.44	.39	.37
6.0	.53	.44	.37	.52	.43	.37	.49	.42	.36	.47	.40	.35	.45	.39	.34	.32
7.0	.48	.39	.33	.47	.38	.32	.45	.37	.32	.43	.36	.31	.41	.35	.30	.28
8.0	.44	.35	.29	.43	.35	.29	.41	.34	.28	.39	.33	.28	.38	.32	.27	.25
9.0	.40	.32	.26	.39	.31	.26	.38	.30	.25	.36	.30	.25	.35	.29	.25	.23
10.0	.37	.29	.24	.36	.29	.23	.35	.28	.23	.34	.27	.23	.32	.27	.22	.21

LAMPS

LUMINAIRE BUDGETARY DIAGRAM

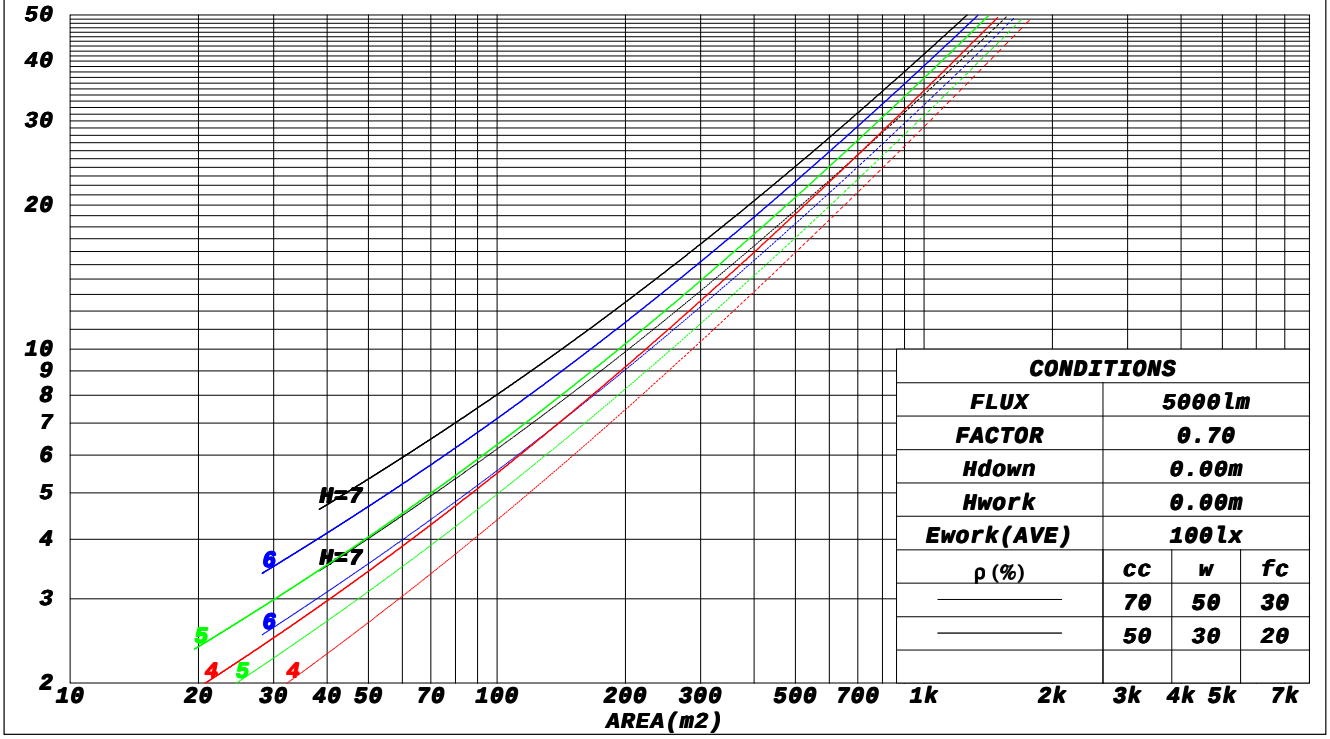

CONDITIONS			
FLUX	5000lm		
FACTOR	0.70		
Hdown	0.00m		
Hwork	0.00m		
Ework(AVE)	100lx		
ρ(%)	cc	w	fc
———	70	50	30
———	50	30	20

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79

WEC AND CCEC

Test:U:120.1V I:0.1378A P:15.89W PF:0.9601 Lamp Flux:1184.39x1 lm		
NAME: 10寸壁灯BK-3CCT+应急	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: WORBEST	SUR.:	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)									
0.0																
1.0	.365	.208	.066	.357	.203	.065	.340	.195	.062	.325	.187	.060	.311	.180	.058	
2.0	.323	.177	.054	.315	.173	.053	.300	.167	.052	.286	.161	.050	.274	.155	.049	
3.0	.290	.154	.046	.283	.151	.046	.270	.146	.044	.257	.141	.043	.246	.136	.042	
4.0	.263	.136	.040	.256	.134	.040	.245	.130	.039	.234	.126	.038	.224	.121	.037	
5.0	.240	.122	.035	.234	.120	.035	.224	.117	.034	.214	.113	.034	.205	.109	.033	
6.0	.221	.111	.032	.216	.109	.031	.206	.106	.031	.197	.103	.030	.189	.100	.030	
7.0	.204	.101	.029	.200	.099	.028	.191	.097	.028	.183	.094	.027	.176	.091	.027	
8.0	.190	.093	.026	.186	.091	.026	.178	.089	.025	.171	.086	.025	.164	.084	.024	
9.0	.177	.086	.024	.173	.085	.024	.166	.082	.023	.160	.080	.023	.154	.078	.023	
10.0	.166	.080	.022	.163	.079	.022	.156	.077	.022	.150	.075	.021	.145	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.230	.230	.230	.197	.197	.197	.134	.134	.134	.077	.077	.077	.025	.025	.025	
1.0	.224	.196	.170	.192	.168	.146	.131	.116	.101	.076	.067	.059	.024	.022	.019	
2.0	.217	.172	.135	.186	.148	.117	.127	.103	.081	.073	.060	.048	.024	.019	.016	
3.0	.209	.155	.112	.179	.134	.097	.123	.093	.068	.071	.054	.040	.023	.018	.013	
4.0	.201	.142	.097	.173	.123	.084	.119	.086	.059	.069	.050	.035	.022	.016	.012	
5.0	.193	.132	.087	.166	.114	.076	.114	.080	.053	.066	.047	.032	.021	.015	.010	
6.0	.186	.124	.079	.160	.107	.069	.110	.075	.049	.064	.044	.029	.021	.014	.010	
7.0	.179	.117	.074	.154	.101	.064	.106	.071	.046	.062	.042	.027	.020	.014	.009	
8.0	.172	.111	.070	.148	.097	.061	.102	.068	.043	.060	.040	.026	.019	.013	.008	
9.0	.166	.106	.066	.143	.092	.058	.099	.065	.041	.058	.038	.024	.019	.013	.008	
10.0	.160	.102	.064	.138	.089	.056	.096	.062	.039	.056	.037	.024	.018	.012	.008	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79

Uncorrected UGR Table

Test:U:120.1V I:0.1378A P:15.89W PF:0.9601 Lamp Flux:1184.39x1 lm		
NAME: 10寸壁灯BK-3CCT+应急	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: WORBEST	SUR.:	PROTECTION ANGLE:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.5	17.0	15.8	17.3	17.6	17.6	19.1	17.9	19.4	19.7
3H	16.5	17.9	16.8	18.2	18.5	20.0	21.4	20.4	21.8	22.1
4H	16.7	18.0	17.1	18.3	18.7	21.4	22.7	21.8	23.1	23.5
6H	16.6	17.9	17.0	18.3	18.7	22.9	24.2	23.3	24.6	24.9
8H	16.6	17.8	17.0	18.2	18.6	23.8	25.0	24.2	25.4	25.8
12H	16.6	17.7	17.0	18.1	18.6	24.7	25.9	25.2	26.3	26.7
4H 2H	16.5	17.8	16.9	18.2	18.6	18.1	19.4	18.5	19.7	20.1
3H	17.8	19.0	18.3	19.4	19.8	20.7	21.9	21.2	22.3	22.7
4H	18.2	19.3	18.7	19.8	20.2	22.3	23.4	22.7	23.8	24.2
6H	18.4	19.4	18.9	19.8	20.3	24.0	25.0	24.5	25.4	25.9
8H	18.5	19.4	18.9	19.8	20.3	25.0	25.9	25.5	26.4	26.9
12H	18.5	19.3	19.0	19.8	20.3	26.1	27.0	26.6	27.4	28.0
8H 4H	19.3	20.2	19.8	20.6	21.1	22.6	23.5	23.0	23.9	24.4
6H	19.8	20.6	20.4	21.1	21.6	24.5	25.3	25.1	25.8	26.3
8H	20.1	20.8	20.6	21.3	21.9	25.7	26.4	26.2	26.9	27.5
12H	20.3	20.9	20.8	21.4	22.0	27.1	27.7	27.6	28.2	28.8
12H 4H	19.6	20.4	20.1	20.9	21.4	22.6	23.4	23.1	23.9	24.4
6H	20.4	21.1	20.9	21.6	22.2	24.6	25.3	25.2	25.8	26.4
8H	20.8	21.4	21.4	22.0	22.6	25.9	26.5	26.4	27.0	27.6
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				

CIE Pub.117 Corrected 1184 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.6)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.1378A P:15.89W PF:0.9601 Lamp Flux:1184.39x1 lm		
NAME: 10寸壁灯BK-3CCT+应急	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: WORBEST	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	53	41	34	53	41	34	51	41	34	27
0.80	63	51	43	62	50	43	60	49	42	35
1.00	71	59	51	70	58	51	67	60	50	42
1.25	78	66	58	76	65	58	73	64	57	49
1.50	83	72	64	81	71	63	77	69	62	53
2.00	90	80	72	88	78	71	84	76	70	61
2.50	94	85	78	92	83	76	87	80	74	65
3.00	97	89	82	95	87	81	90	84	79	69
4.00	102	95	89	99	93	87	94	89	84	74
5.00	105	98	93	102	96	91	96	92	88	77
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.1378A P:15.89W PF:0.9601 Lamp Flux:1184.39x1 lm		
NAME: 10寸壁灯BK-3CCT+应急	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: WORBEST	SUR.:	PROTECTION ANGLE:

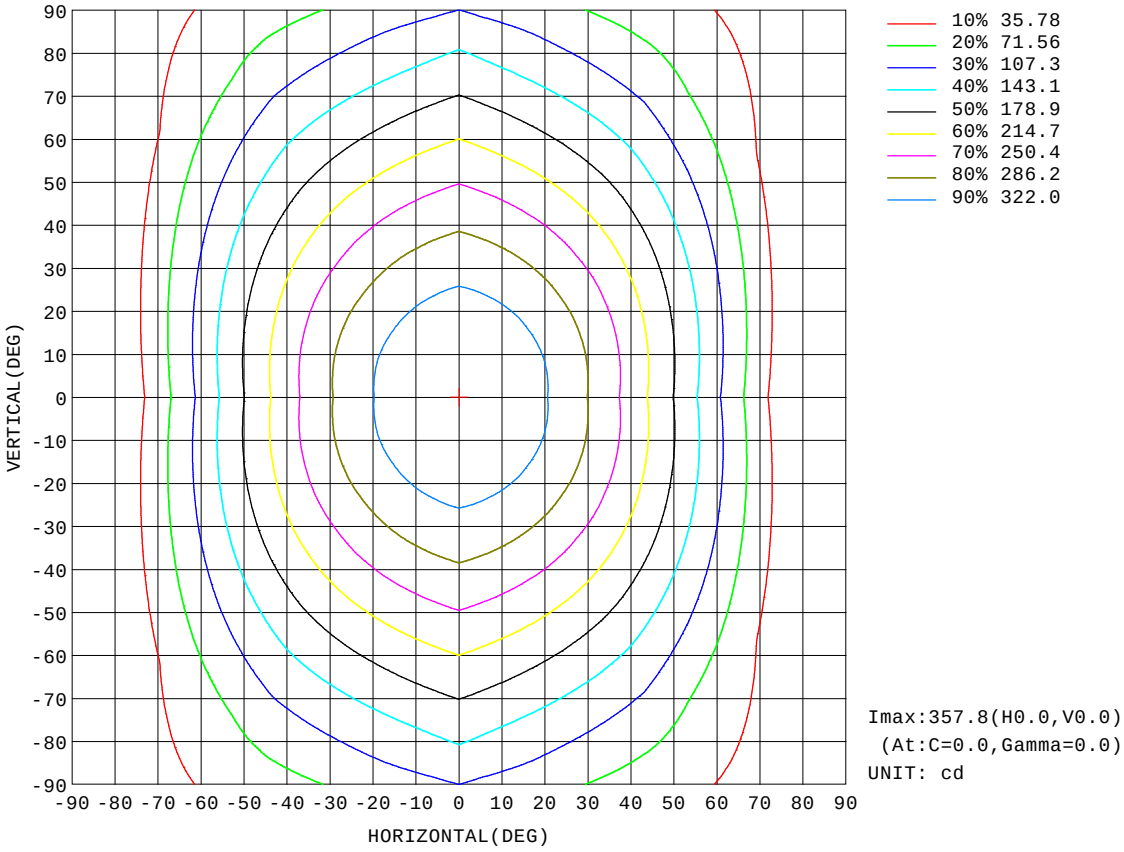


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79

AAI CURVES

Test:U:120.1V I:0.1378A P:15.89W PF:0.9601 Lamp Flux:1184.39x1 lm		
NAME: 10寸壁灯BK-3CCT+应急	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: WORBEST	SUR.:	PROTECTION ANGLE:

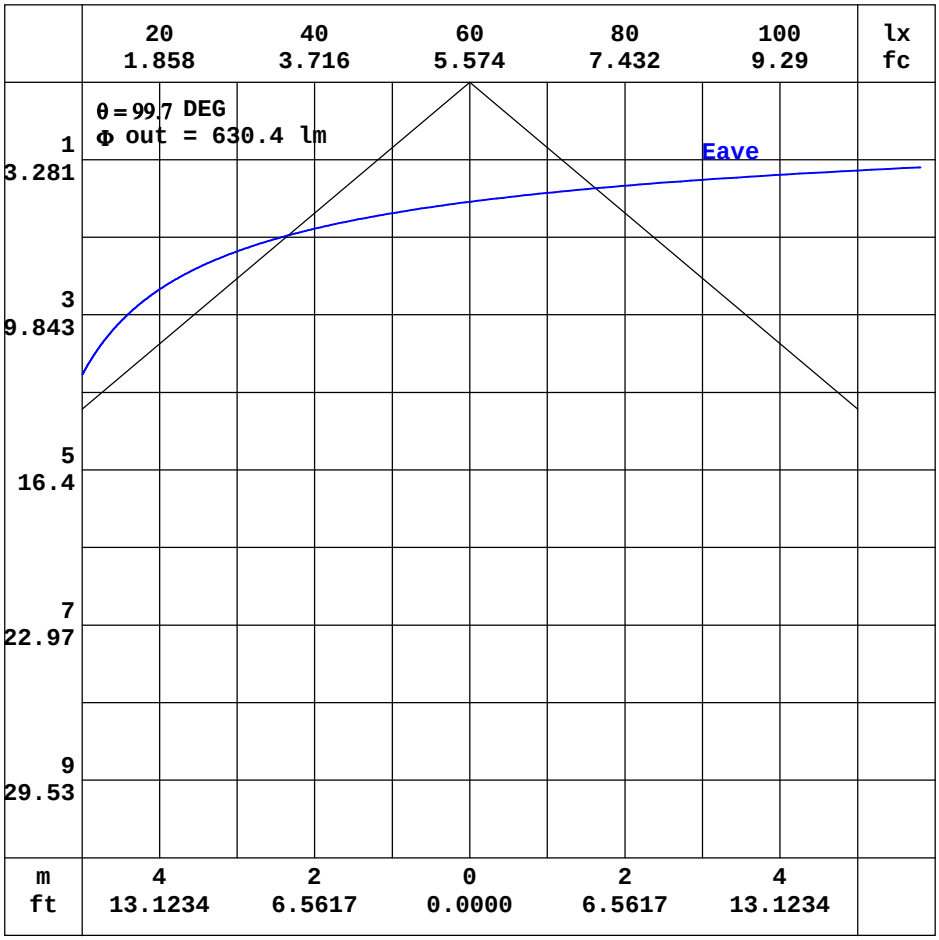


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79

ISOLUX DIAGRAM


Test:U:120.1V I:0.1378A P:15.89W PF:0.9601 Lamp Flux:1184.39x1 lm		
NAME: 10寸壁灯BK-3CCT+应急	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: WORBEST	SUR.:	PROTECTION ANGLE:

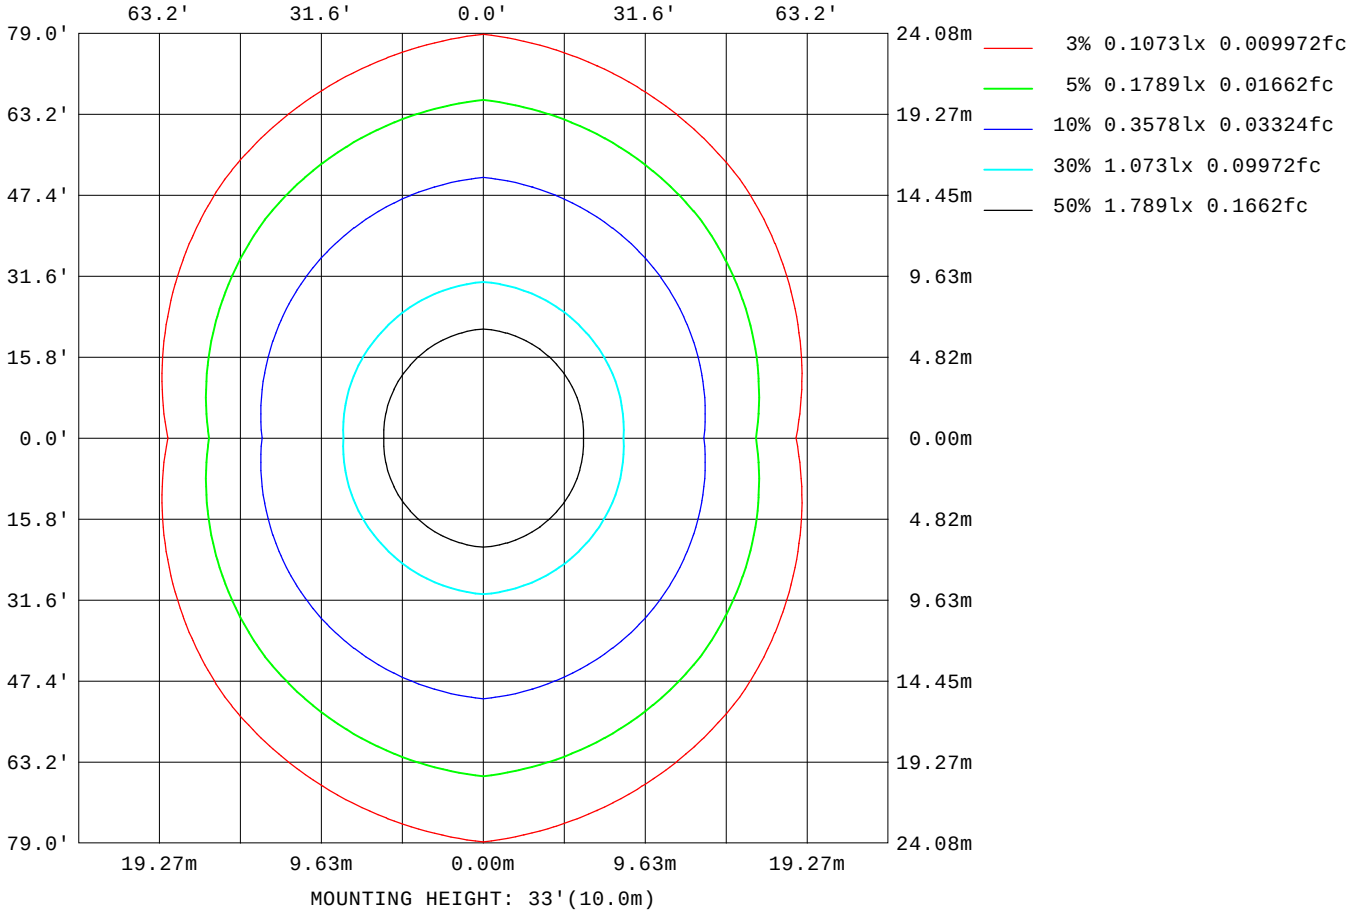

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79

Planar Illuminance Curve

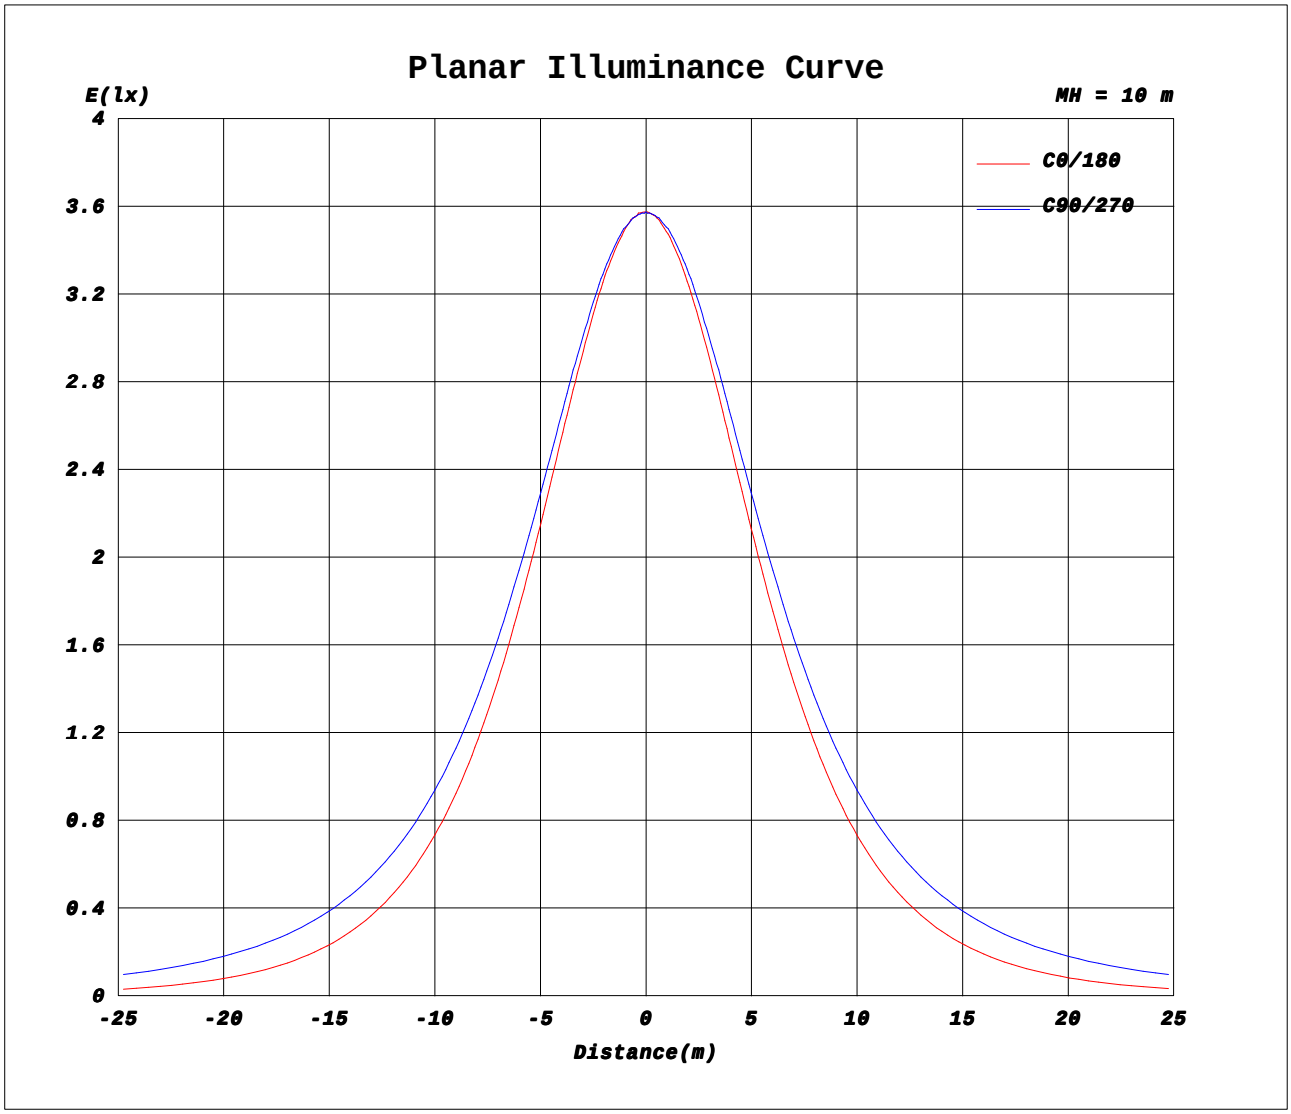

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.1378A P:15.89W PF:0.9601 Lamp Flux:1184.39x1 lm		
NAME: 10寸壁灯BK-3CCT+应急	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: WORBEST	SUR.:	PROTECTION ANGLE:

Table--1 UNIT: cd

γ (DEG) \ C(DEG)	0	45	90	135	180	225	270	315
0	358	357	357	357	357	357	357	357
5	355	356	356	355	354	355	356	356
10	348	350	351	348	347	348	351	350
15	338	341	345	339	336	339	345	341
20	324	329	335	327	321	327	335	329
25	306	314	324	312	303	312	324	314
30	286	297	311	295	283	295	311	297
35	262	278	297	276	260	276	297	278
40	236	257	282	256	235	256	282	257
45	208	235	266	235	208	235	266	235
50	178	214	249	213	178	213	249	214
55	146	191	232	191	148	191	232	191
60	113	168	215	170	116	170	215	168
65	79.5	147	197	149	83.8	149	197	147
70	47.1	126	180	129	52.9	129	180	126
75	18.5	106	162	109	25.6	109	162	106
80	0.00	86.6	146	90.4	1.82	90.4	146	86.6
85	0.00	68.9	129	72.9	0.00	72.9	129	68.9
90	0.00	52.6	107	56.4	0.00	56.4	107	52.6
95	0.00	37.3	82.0	40.9	0.00	40.9	82.0	37.3
100	0.00	23.5	53.5	26.2	0.00	26.2	53.5	23.5
105	0.00	1.39	39.7	0.71	0.00	0.71	39.7	1.39
110	0.00	0.00	27.4	0.00	0.00	0.00	27.4	0.00
115	0.00	0.00	16.4	0.00	0.00	0.00	16.4	0.00
120	0.00	0.00	5.66	0.00	0.00	0.00	5.66	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-11-19

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.269
Humidity:65.0%
Test Distance:8.400m [K=1.0000]
Remarks: LM79