




Connector your can choose Alternative as HECON Standard Or Original JST. Molex,AMP, TE

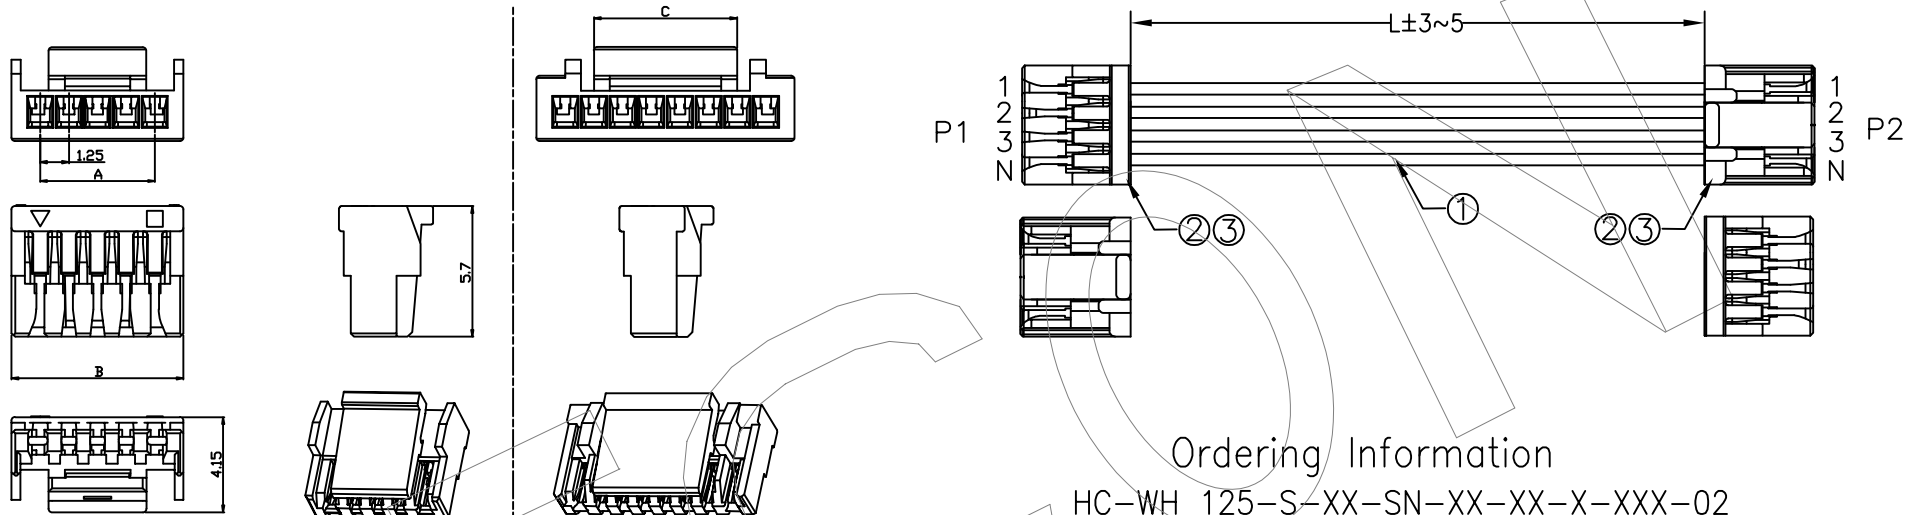

Ordering Information
HC-WH 125-S-XX-SN-XX-XX-X-XXX-02

Wire Harness
Pitch 125=1.25 Pitch
S=Standard
C=Customized
No. of Pins 2P~15P
Contact Plating SN=Plating Tin
CT=Cable Tie
TE=Tape
WD=Woven Braid
HT=Heat Shrink Tubing
SW=Spiral Wrap
TD=Twisted
IT=Insulation Tubing
SP=Special

Wire AWG
30=30AWG
28=28AWG
26=26AWG

Wire Color
B=Black
BR=Brown
R=Red
O=Orange
Y=Yellow
GR=Green
BL=Blue
P=Purple
G=Grey
W=White

Length 100=100mm
Serial number

REMARKS:
1. 100% Open/Short test.
2. DC Test:300V/10ms.
3. Insulation Resistance:5.0M OHM/Min.
4. Conductance Resistance:5.0 OHM/Max.

Poles	Part No.		Dimensions mm		
			A	B	C
2	GH125-H02	GH-2P	1.25	3.75	1.95
3	GH125-H03	GH-3P	2.5	5.00	3.20
4	GH125-H04	GH-4P	3.75	6.25	4.26
5	GH125-H05	GH-5P	5.0	7.50	4.26
6	GH125-H06	GH-6P	6.25	8.75	6.20
7	GH125-H07	GH-7P	7.5	10.00	6.20
8	GH125-H08	GH-8P	8.75	11.25	6.20
9	GH125-H09	GH-9P	10.0	12.50	6.20
10	GH125-H10	GH-10P	11.25	13.75	8.15
11	GH125-H11	GH-11P	12.5	15.00	8.15
12	GH125-H12	GH-12P	13.75	16.25	8.15
13	GH125-H13	GH-13P	15.0	17.50	8.15
14	GH125-H14	GH-14P	16.25	18.75	8.15
15	GH125-H15	GH-15P	17.5	20.00	8.15

3	GH1.25mm terminal,Plating Tin	XPCS
2	GH1.25mm XP Housing,White	2PCS
1	30AWG~26AWG XX Color	XPCS
NO.	MATERIAL&SPECIFICATION	Q'ty

				OPERATION		DRAW	BoFeng	2020.04.20	SCALE	FIT	HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD	
				X.X	±0.30							
				X.XX	±0.20	CHECK	Jack L	2020.04.20	SIZE	A4	PART NO.	HC-WH125-S-XX-SN-XX-XX-X-XXX-02
				X.XXX	±0.10							
						APPROVE			SHEET	1/1	TITLE:	GH1.25-XP TO GH1.25-XP
				DIM	TOL							
A0	2020.04.20	NEW DRAWING										
REV	DATE	MODIFICATION DESCRIPTION		CHANGE					PROJ.			