


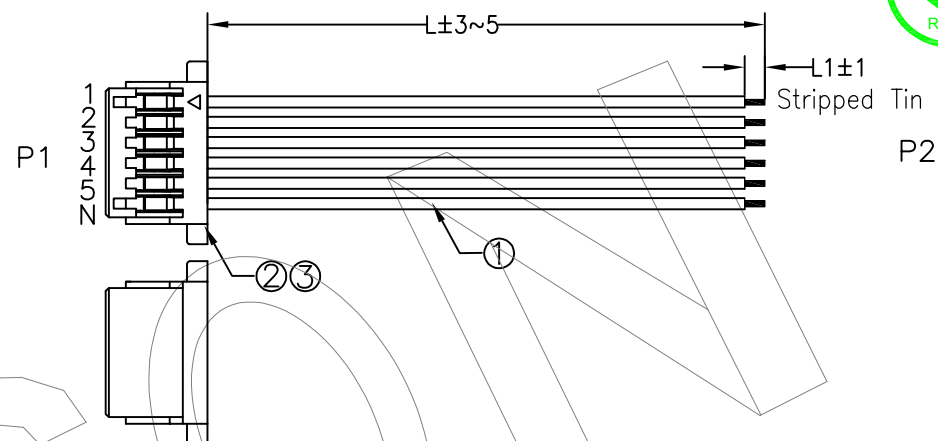

HC-WH 10-S-XX-SN-XX-XX-X-XXX-03

Wire Harness Pitch 10=1.0 Pitch

S=Standard
C=Customized

No. of Pins
2P~30P

Contact Plating
SN=Plating Tin

CT=Cable Tie
TE=Tape
WD=Woven Braid
HT=Heat Shrink Tubing
SW=Spiral Wrap
TD=Twisted
IT=Insulation Tubing
SP=Special

Wire AWG
32=32AWG
30=30AWG
28=28AWG

Wire Color
B=Black
BR=Brown
R=Red
O=Orange
Y=Yellow
GR=Green
BL=Blue
P=Purple
G=Grey
W=White

Length
100=100mm

Serial number

3	SH1.0mm terminal,Plating Tin	XPCS
2	SH1.0mm XP Housing,White	1PCS
1	32AWG~28AWG XX Color	XPCS
NO.	MATERIAL&SPECIFICATION	Q'ty

Poles	Part No.		Dimensions mm	
			A	B
2	SH10-H02	SH1.0-2P	1.00	5.00
3	SH10-H03	SH1.0-3P	2.00	6.00
4	SH10-H04	SH1.0-4P	3.00	7.00
5	SH10-H05	SH1.0-5P	4.00	8.00
6	SH10-H06	SH1.0-6P	5.00	9.00
7	SH10-H07	SH1.0-7P	6.00	10.00
8	SH10-H08	SH1.0-8P	7.00	11.00
9	SH10-H09	SH1.0-9P	8.00	12.00
10	SH10-H10	SH1.0-10P	9.00	13.00
11	SH10-H11	SH1.0-11P	10.00	14.00
12	SH10-H12	SH1.0-12P	11.00	15.00
13	SH10-H13	SH1.0-13P	12.00	16.00
14	SH10-H14	SH1.0-14P	13.00	17.00
15	SH10-H15	SH1.0-15P	14.00	18.00
16	SH10-H16	SH1.0-16P	15.00	19.00
17	SH10-H17	SH1.0-17P	16.00	20.00
18	SH10-H18	SH1.0-18P	17.00	21.00
19	SH10-H19	SH1.0-19P	18.00	22.00
20	SH10-H20	SH1.0-20P	19.00	23.00
—	—	—	—	—
30	SH10-H30	SH1.0-30P	29.00	33.00

REMARKS:

1. 100% Open/Short test.
2. DC Test:300V/10ms.
3. Insulation Resistance:5.0M OHM/Min.
4. Conductance Resistance:5.0 OHM/Max.

				OPERATION		DRAW	BoFeng	2020.04.20	SCALE	FIT	HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD	
				X.X	±0.30				CHECK	Jack L		
				X.XX	±0.20	SIZE	A4	PART NO.			HC-WH10-S-XX-SN-XX-XX-X-XXX-03	
AO	2020.04.20	NEW DRAWING		X.XXX	±0.10	SHEET	1/1					TITLE:
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	APPROVE			PROJ.		