

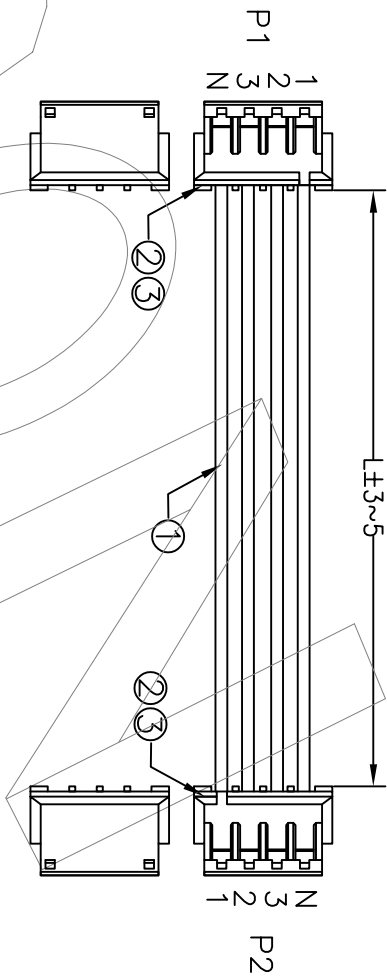


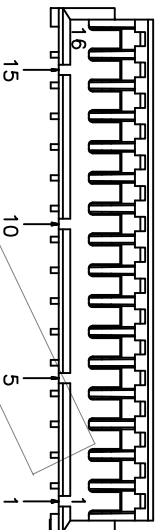

Connector you can choose Alternative as HECON Standard Or Original JST. Molex,AMP, TE

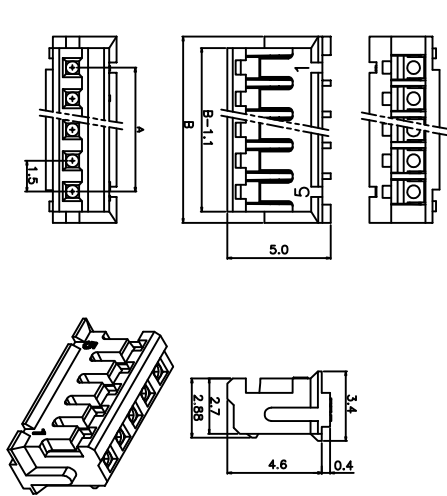

Ordering Information

HC-WH 15-S-XX-SN-XX-XX-X-XXX-01

Wire Harness Pitch 15=1.5 Pitch S=Standard C=Customized No. of Pins 2P~20P Contact Plating Sn=Plating Tin Wire AWG 32=32AWG 30=30AWG 28=28AWG 26=26AWG Wire Color B=Black BR=Brown R=Red O=Orange Y=Yellow GR=Green BL=Blue P=Purple G=Grey W=White Length 100=100mm Serial number

CR=Cable Tie TE=Tape WD=Woven Broid HT=Heat Shrink Tubing SW=Spiral Wrap TD=Twisted IT=Insulation Tubing SP=Special

REMARKS:

- 100% Open/Short test.
- DC Test:300V/10ms.
- Insulation Resistance:5.0M OHM/Min.
- Conductance Resistance:5.0 OHM/Max.

3	ZH1.5mm terminal,Plating Tin	XPCS
2	ZH1.5mm XP Housing,White	2PCS
1	32AWG~26AWG XX Color	XPCS
NO.	MATERIAL&SPECIFICATION	Q'ty

Poles	Part No.	Dimensions mm		
		A	B	
2	ZH15-H02	ZH-2P	1.50	4.50
3	ZH15-H03	ZH-3P	3.00	6.00
4	ZH15-H04	ZH-4P	4.50	7.50
5	ZH15-H05	ZH-5P	6.00	9.00
6	ZH15-H06	ZH-6P	7.50	10.50
7	ZH15-H07	ZH-7P	9.00	12.00
8	ZH15-H08	ZH-8P	10.50	13.50
9	ZH15-H09	ZH-9P	12.00	15.00
10	ZH15-H10	ZH-10P	13.50	16.50
11	ZH15-H11	ZH-11P	15.00	18.00
12	ZH15-H12	ZH-12P	16.50	19.50
13	ZH15-H13	ZH-13P	18.00	21.00
14	ZH15-H14	ZH-14P	19.50	22.50
15	ZH15-H15	ZH-15P	21.00	24.00
16	ZH15-H16	ZH-16P	22.50	25.50
17	ZH15-H17	ZH-17P	24.00	27.00
18	ZH15-H18	ZH-18P	25.50	28.50
19	ZH15-H19	ZH-19P	27.00	30.00
20	ZH15-H20	ZH-20P	28.50	31.50

HECON 东莞市禾电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

						OPERATION							
							X.X	±0.30	DRAW	BoFeng	2020.04.20	SCALE	FIT
												UNIT	mm
							X.XX	±0.20	CHECK	Jack L	2020.04.20	SIZE	A4
							X.XXX	±0.10				SHEET	1/1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE			PROJ.				
 东莞市禾电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD													
PART NO.		HC-WH15-S-XX-SN-XX-XX-X-XXX-01											
TITLE:		ZH1.5-XP TO ZH1.5-XP											