
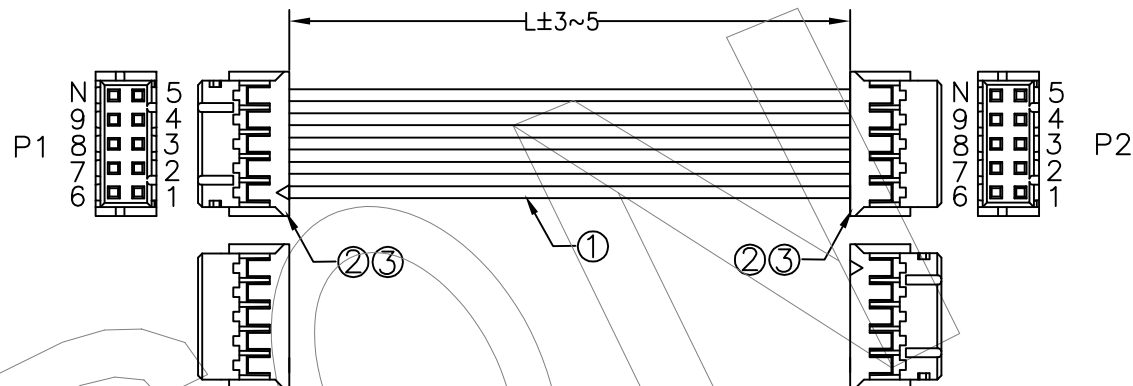

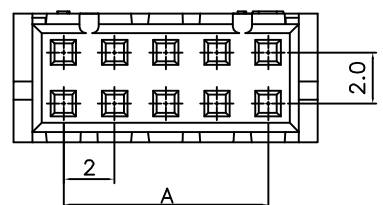



Connector you can choose Alternative as HECON Standard Or Original JST. Molex,AMP, TE

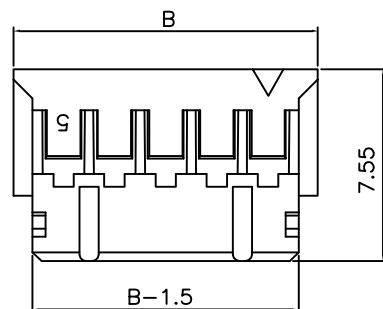

Ordering Information

HC-WH 20*2-S-2*X-SN-XX-XX-X-XXX-02

Wire Harness Pitch 20*2=2.0Pitch*2 S=Standard C=Customized No. of Pins 2*2P~2*20P Contact Plating SN=Plating Tin CT=Cable Tie TE=Tape WD=Woven Braid HT=Heat Shrink Tubing SW=Spiral Wrap TD=Twisted IT=Insulation Tubing SP=Special Wire AWG 28=28AWG 26=26AWG 24=24AWG 22=22AWG Wire Color B=Black BR=Brown R=Red O=Orange Y=Yellow GR=Green BL=Blue P=Purple G=Grey W=White Length 100=100mm Serial number

REMARKS:

- 100% Open/Short test.
- DC Test:300V/10ms.
- Insulation Resistance:5.0M OHM/Min.
- Conductance Resistance:5.0 OHM/Max.

Poles	Part No.		Dimensions mm	
			A	B
4	PHD20-H02*2	PHD-2*2P	2.00	5.9
6	PHD20-H03*2	PHD-2*3P	4.00	7.9
8	PHD20-H04*2	PHD-2*4P	6.00	9.9
10	PHD20-H05*2	PHD-2*5P	8.00	11.9
12	PHD20-H06*2	PHD-2*6P	10.00	13.9
14	PHD20-H07*2	PHD-2*7P	12.00	15.9
16	PHD20-H08*2	PHD-2*8P	14.00	17.9
18	PHD20-H09*2	PHD-2*9P	16.00	19.9
20	PHD20-H10*2	PHD-2*10P	18.00	21.9
22	PHD20-H11*2	PHD-2*11P	20.00	23.9
24	PHD20-H12*2	PHD-2*12P	22.00	25.9
26	PHD20-H13*2	PHD-2*13P	24.00	27.9
-	-	-	-	-
40	PHD20-H20*2	PHD-2*20P	38.00	41.9

3	PHD2.0mm terminal,Plating Tin	XPCS
2	PHD2.0mm 2*XP Housing,White	2PCS
1	28AWG~22AWG XX Color	XPCS
NO.	MATERIAL&SPECIFICATION	Q'ty

				OPERATION		DRAW	BoFeng	2020.04.20	SCALE	FIT	HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD			
				X.X	±0.30				CHECK	Jack L			2020.04.20	UNIT
				X.XX	±0.20	APPROVE								SIZE
A0	2020.04.20	NEW DRAWING		X.XXX	±0.10				DIM	TOL				SHEET
REV	DATE	MODIFICATION DESCRIPTION		CHANGE				PROJ.						