
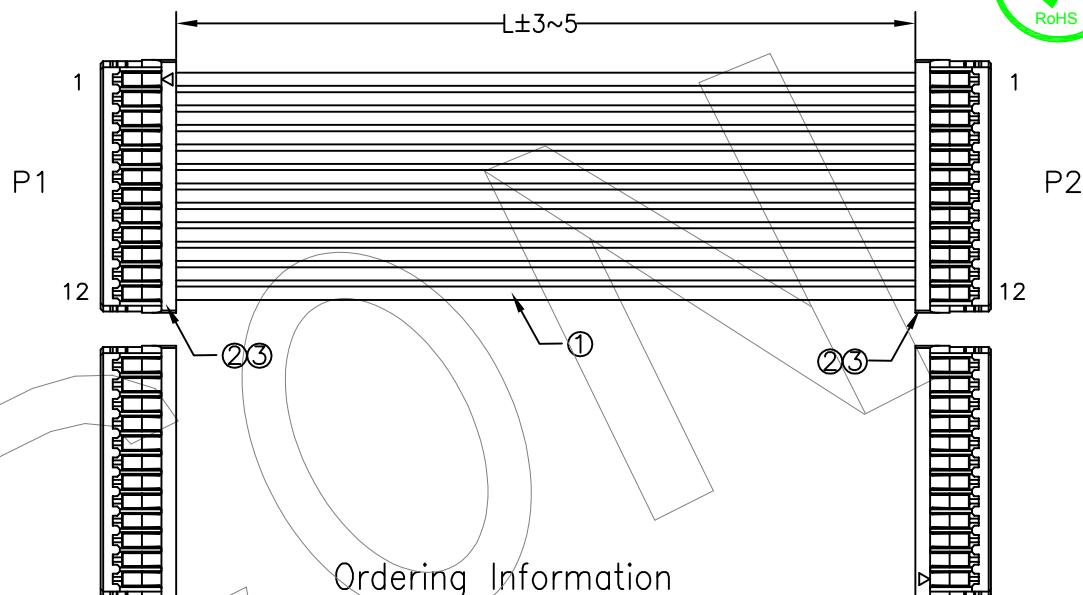
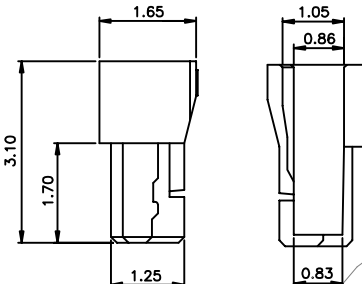
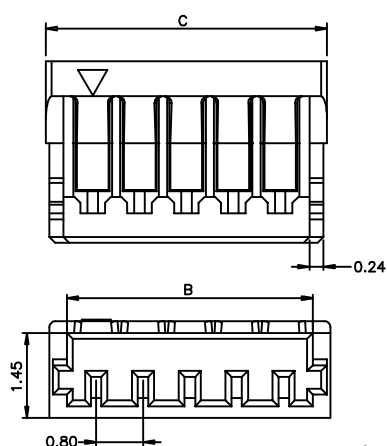


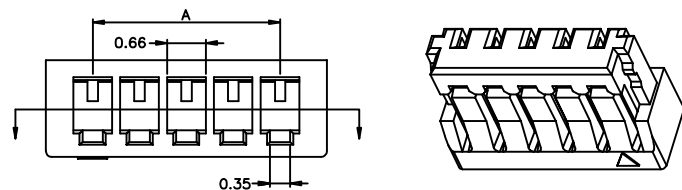

HC-WH 08-S-XX-SN-XX-XX-X-XXX-02

Wire Harness

Pitch
08=0.8 Pitch

S=Standard
C=Customized

No. of Pins
2P~20P

Contact Plating
SN=Plating Tin

CT=Cable Tie
TE=Tape
WB=Woven Braid
HT=Heat Shrink Tubing
SW=Spiral Wrap
TD=Twisted
IT=Insulation Tubing
SP=Special

Wire AWG
32=32AWG
30=30AWG
28=28AWG

Wire Color
B=Black
BR=Brown
R=Red
O=Orange
Y=Yellow
GR=Green
BL=Blue
P=Purple
G=Gray
W=White

Length
100=100mm

Serial number

1. 100% Open/Short test.
2. DC Test:300V/10ms.
3. Insulation Resistance:5.0M OHM/Min.
4. Conductance Resistance:5.0 OHM/Max.

3	0.8mm terminal,Plating Tin	XPCS
2	0.8mm XP Housing,White	2PCS
1	32AWG~28AWG XX Color	XPCS
NO.	MATERIAL&SPECIFICATION	Q'ty

				OPERATION		DRAW	BoFeng	2020.04.20	SCALE	FIT	 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	Jack L	2020.04.20	SIZE	A4	PART NO.	HC-WH08-S-XX-SN-XX-XX-X-XXX-02
A0	2020.04.20	NEW DRAWING		X.XXX	±0.10				SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE			PROJ.		TITLE:	0.8-XP TO 0.8-XP