


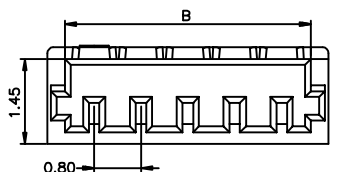


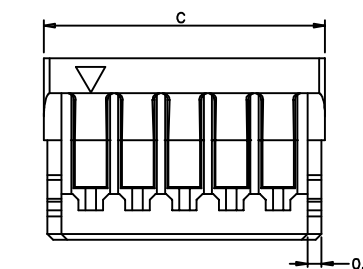




Connector you can choose Alternative as HECON Standard Or Original JST. Molex,AMP, TE

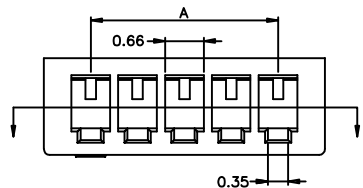

P1

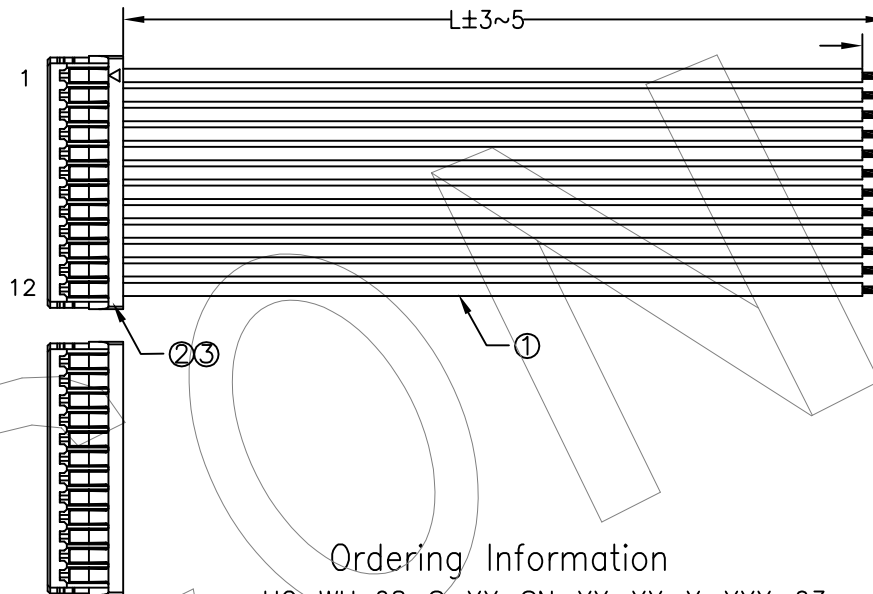

P2

Ordering Information

HC-WH 08-S-XX-SN-XX-XX-X-XXX-03

Wire Harness

Pitch
08=0.8 Pitch

S=Standard
C=Customized

No. of Pins
2P~20P

Contact Plating
SN=Plating Tin

CT=Cable Tie
TE=Tape
WD=Woven Braid
HT=Heat Shrink Tubing
SW=Spiral Wrap
TD=Twisted
IT=Insulation Tubing
SP=Special

Wire AWG
32=32AWG
30=30AWG
28=28AWG

Wire Color
B=Black
BR=Brown
R=Red
O=Orange
Y=Yellow
GR=Green
BL=Blue
P=Purple
G=Grey
W=White

Length
100=100mm

Serial number

REMARKS:

- 100% Open/Short test.
- DC Test:300V/10ms.
- Insulation Resistance:5.0M OHM/Min.
- Conductance Resistance:5.0 OHM/Max.

3	0.8mm terminal,Plating Tin	XPCS
2	0.8mm XP Housing,White	1PCS
1	32AWG~28AWG XX Color	XPCS
NO.	MATERIAL&SPECIFICATION	Q'ty

Poles	Part No.		Dimensions mm		
			A	B	C
2	08-H02	0.8-2P	0.80	1.80	2.80
3	08-H03	0.8-3P	1.60	2.60	3.20
4	08-H04	0.8-4P	2.40	3.40	4.00
5	08-H05	0.8-5P	3.20	4.20	4.80
6	08-H06	0.8-6P	4.00	5.00	5.60
7	08-H07	0.8-7P	4.80	5.80	6.40
8	08-H08	0.8-8P	5.60	6.60	7.20
9	08-H09	0.8-9P	6.40	7.40	8.00
10	08-H10	0.8-10P	7.20	8.20	8.80
11	08-H11	0.8-11P	8.00	9.00	9.60
12	08-H12	0.8-12P	8.80	9.80	10.40
13	08-H13	0.8-13P	9.60	10.60	11.20
14	08-H14	0.8-14P	10.40	11.40	12.00
15	08-H15	0.8-15P	11.20	12.20	12.80
16	08-H16	0.8-16P	12.00	13.00	13.60
17	08-H17	0.8-17P	12.80	13.80	14.40
18	08-H18	0.8-18P	13.60	14.60	15.20
19	08-H19	0.8-19P	14.40	15.40	16.00
20	08-H20	0.8-20P	15.20	16.20	16.80

				OPERATION		DRAW	BoFeng	2020.04.20	SCALE	FIT	HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	Jack L	2020.04.20	SIZE	A4	PART NO.	HC-WH08-S-XX-SN-XX-XX-X-XXX-03
AO	2020.04.20	NEW DRAWING		X.XXX	±0.10				SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	APPROVE		PROJ.		TITLE:	0.8-XP TO Stripped Tin